

TPS82740x 360nA I_Q MicroSiP™ 降压转换器模块，用于低功率应用

1 特性

- 360nA 静态电流典型值
- 10 μ A 输出电流时的效率高达 90%
- 引脚可选输出电压，步长 100mV
- 集成转换率受控负载开关
- 高达 200mA 输出电流
- 2.2V 至 5.5V 的输入电压范围 V_{IN}
- 射频 (RF) 友好型 DCS-Control™
- 低输出电压纹波
- 自动转换至无纹波 100% 模式
- V_{OUT} 和 $LOAD$ 上的放电功能
- 高度不到 1.1mm 的解决方案
- 总体解决方案尺寸 < 6.7mm²
- 小型 2.3mm x 2.9mm MicroSiP™ 封装


2 应用范围

- **Bluetooth®** 低功耗 (Low Energy)，消费类电子产品用射频 (RF4CE)，短距低功耗通信协议 (Zigbee)
- 可穿戴电子产品
- 能量采集

3 说明

TPS82740 是业界第一款降压转换器模块，此模块特有典型值为 360nA 的静态流耗。它是一款用于超低功率应用的完整 MicroSiP™ 直流/直流降压电源解决方案。此模块包括开关稳压器、电感器和输入/输出电容器。将所有需要的无源组件集成在一起可实现仅为 6.7mm² 的微型解决方案尺寸。

4 典型应用

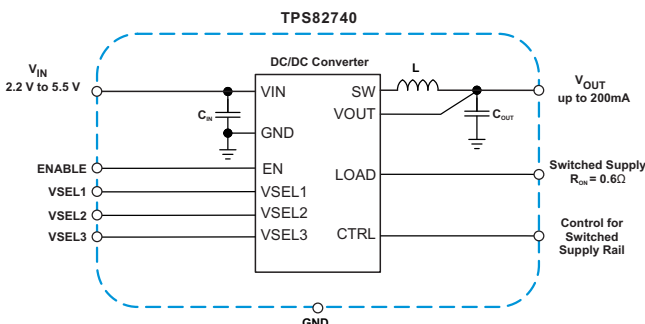

这款全新的基于 DCS-Control™ 的器件将轻负载效率范围拓展至 10 μ A 负载电流以下。它支持高达 200mA 的输出电流。

此器件由可再充电锂离子电池，锂化学电池（例如锂亚硫酰氯 (Li-SOC12)，锂锰电池 (Li-MnO₂)）和两节或三节碱性电池供电运行。输入电压范围高达 5.5V，也可实现由 1 个 USB 端口和薄膜太阳能模块供电运行。

用户可通过三个电压选择引脚 (VSEL) 在 1.8V 至 2.5V (TPS82740A) 和 2.6V 至 3.3V (TPS82740B) 的范围内以 100mV 的步长选择输出电压。TPS82740 特有低输出电压纹波和低噪声。一旦电池电压接近输出电压（接近 100% 占空比），此器件进入无纹波 100% 模式运行，以防止增加输出电压纹波。在这个情况下，此器件停止开关，并且输出被连接至输入电压。


集成的转换率受控负载开关（具有 0.6 Ω 的导通电阻典型值）将已选输出电压配送至一个临时使用的子系统。

TPS82740 采用小型 9 焊锡凸点 6.7mm² MicroSiP™ 封装。

器件信息⁽¹⁾

产品型号	封装	封装尺寸（标称值）
TPS82740A	μ SIP	2.30mm x 2.90mm
TPS82740B	μ SIP	2.30mm x 2.90mm

(1) 要了解所有可用封装，请见数据表末尾的可订购产品附录。

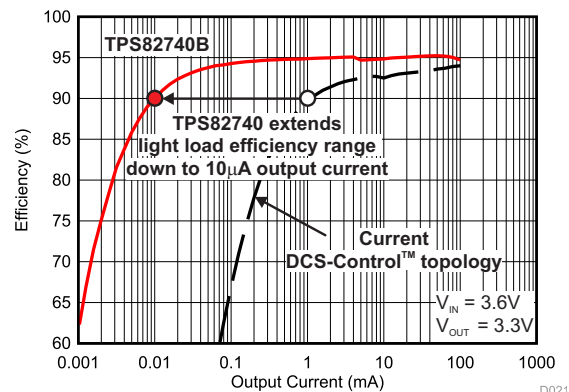

D021



目录

1	特性	1	10.2	Functional Block Diagram	15
2	应用范围	1	10.3	Feature Description	15
3	说明	1	10.4	Device Functional Modes	17
4	典型应用	1	11	Application and Implementation	19
5	修订历史记录	2	11.1	Application Information	19
6	Device Comparison Table	3	11.2	Typical Application	19
7	Pin Configuration and Functions	3	12	Power Supply Recommendations	22
8	Specifications	4	13	Layout	22
8.1	Absolute Maximum Ratings	4	13.1	Layout Guidelines	22
8.2	Handling Ratings	4	13.2	Layout Example	22
8.3	Recommended Operating Conditions	4	13.3	Surface Mount Information	23
8.4	Thermal Information	5	14	器件和文档支持	24
8.5	Electrical Characteristics	5	14.1	文档支持	24
8.6	Typical Characteristics	6	14.2	商标	24
9	Parameter Measurement Information	14	14.3	静电放电警告	24
10	Detailed Description	15	14.4	术语表	24
10.1	Overview	15	15	机械封装和可订购信息	24

5 修订历史记录

Changes from Original (June 2014) to Revision A

Page

- Added 150 mA Typical current specification for $I_{LIM_softstart}$, Low side MOSFET switch current limit..... **6**

6 Device Comparison Table

PART NUMBER	OUTPUT VOLTAGE SETTINGS (VSEL1, VSEL2, VSEL3)	PACKAGE MARKING
TPS82740A	1.8V to 2.5V in 100mV steps	E7
TPS82740B	2.6V to 3.3V in 100mV steps	E8

7 Pin Configuration and Functions

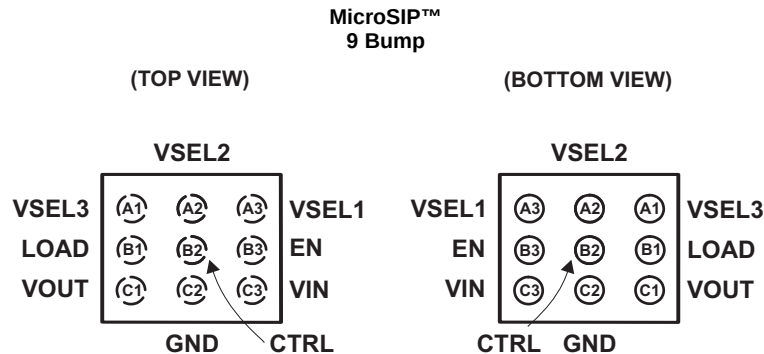


Table 1. Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO		
VIN	C3	IN	Input voltage supply pin of the module.
GND	C2	-	Ground terminal.
CTRL	B2	IN	CTRL pin controls the LOAD output pin. With CTRL = low, the LOAD output is disabled. This pin must be terminated and not left floating.
VOUT	C1	OUT	Output voltage pin of the module. An internal load switch is connected between VOUT pin and LOAD pin.
LOAD	B1	OUT	Load switch output pin controlled by the CTRL pin. With CTRL = high, an internal load switch connects the LOAD pin to the VOUT pin. The LOAD pin allows connect / disconnect other system components to the output of the DC/DC converter. This pin is pulled to GND with the CTRL pin = low. The LOAD pin features soft switching. If not used, leave the pin open.
VSEL3	A1	IN	Output voltage selection pins. See Table 2 and Table 3 for V _{OUT} selection. These pins must be terminated and can be changed during operation.
VSEL2	A2	IN	
VSEL1	A3	IN	
EN	B3	IN	High level enables the devices and low level turns the device into shutdown mode. This pin must be terminated and not left floating.

Table 2. Output Voltage Setting TPS82740A

Device	VOUT	VSEL3	VSEL2	VSEL1
TPS82740A	1.8	0	0	0
	1.9	0	0	1
	2.0	0	1	0
	2.1	0	1	1
	2.2	1	0	0
	2.3	1	0	1
	2.4	1	1	0
	2.5	1	1	1

Table 3. Output Voltage Setting TPS82740B

Device	VOUT	VSEL3	VSEL2	VSEL1
TPS82740B	2.6	0	0	0
	2.7	0	0	1
	2.8	0	1	0
	2.9	0	1	1
	3.0	1	0	0
	3.1	1	0	1
	3.2	1	1	0
	3.3	1	1	1

8 Specifications

8.1 Absolute Maximum Ratings⁽¹⁾

Over operating free-air temperature range (unless otherwise noted)

		VALUE		UNIT
		MIN	MAX	
Pin voltage ⁽²⁾	VIN	−0.3	6	V
	EN, CTRL, VSEL1, VSEL2, VSEL3	−0.3	V _{IN} +0.3V	V
	VOUT, LOAD	−0.3	3.7	V
Operating ambient temperature range, T _A ⁽³⁾		−40	85	°C
Operating junction temperature T _J		−40	125	°C

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute–maximum–rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to network ground terminal GND.
- (3) In applications where ambient temperature (T_A) constantly stays above 70°C, the product life time might degrade. MLCC capacitor reliability and lifetime is depending on temperature and applied voltage conditions. At higher temperatures, MLCC capacitors are subject to stronger stress. The most critical parameter is the Insulation Resistance (IR) resulting in leakage current.

8.2 Handling Ratings

			MIN	MAX	UNIT
T _{stg}	Storage temperature range		−55	125	°C
V _(ESD)	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾	0	2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾	0	1000	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. The human body model is a 100-pF capacitor discharged through a 1.5-kΩ resistor into each pin.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

8.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
V _{IN}	Supply voltage V _{IN}		2.2		5.5	V
I _{OUT} + I _{LOAD}	Device output current (sum of I _{OUT} and I _{LOAD})	V _{OUTnom} + 0.7V ≤ V _{IN} ≤ 5.5V			200	mA
		V _{OUTnom} ≤ V _{IN} ≤ V _{OUTnom} + 0.7V			100	
I _{LOAD}	Load current (current from LOAD pin)				100	
C _{OUT}	Additional output capacitance connected to VOUT pin (not including LOAD pin)				10	μF
C _{LOAD}	Capacitance connected to LOAD pin				10	
T _J	Operating junction temperature range		−40		90	°C
T _A	Operating ambient temperature range		−40		85	

8.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TPS82740	UNIT
		μSIP	
		9 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	83	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	53	
R _{θJB}	Junction-to-board thermal resistance	-	
ψ _{JT}	Junction-to-top characterization parameter	-	
ψ _{JB}	Junction-to-board characterization parameter	-	
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	-	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

8.5 Electrical Characteristics

V_{IN} = 3.6V, T_A = –40°C to 85°C, typical values are at T_A = 25°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
SUPPLY							
V _{IN}	Input voltage range			2.2		5.5	V
I _Q	Operating quiescent current	EN = V _{IN} , CTRL = GND, I _{OUT} = 0μA, V _{OUT} = 1.8V / 2.6V, device not switching			360	2300	nA
		EN = V _{IN} , I _{OUT} = 0mA, CTRL = GND, V _{OUT} = 1.8V device switching			460		
		EN = V _{IN} , I _{OUT} = 0mA, CTRL = GND, V _{OUT} = 2.6V, device switching			500		
		EN = V _{IN} , I _{OUT} = 0mA., CTRL = V _{IN} , V _{OUT} = 1.8V, device not switching			12.5		μA
		EN = V _{IN} , I _{OUT} = 0mA., CTRL = V _{IN} , V _{OUT} = 2.6V, device not switching			13.5		
I _{SD}	Shutdown current	EN = GND, shutdown current into V _{IN}			70		nA
		EN = GND, shutdown current into V _{IN} , T _A = 60°C			150		
V _{TH_UVLO+}	Undervoltage lockout threshold	Rising V _{IN}			2.075	2.15	V
V _{TH_UVLO-}		Falling V _{IN}			1.925	2	
INPUTS EN, CTRL, VSEL 1-3							
V _{IH_TH}	High level input threshold	2.2V ≤ V _{IN} ≤ 5.5V				1.1	V
V _{IL_TH}	Low level input threshold	2.2V ≤ V _{IN} ≤ 5.5V			0.4		V
I _{IN}	Input bias Current	T _A = 25°C				10	nA
		T _A = −40°C to 85°C				25	
POWER SWITCHES							
I _{LIMF}	High side MOSFET switch current limit	2.2V ≤ V _{IN} ≤ 5.5V			430		mA
				430		mA	
OUTPUT DISCHARGE SWITCH (VOUT)							
R _{DSCH_VOUT}	MOSFET on-resistance	EN = GND, I _{OUT} = -10mA into VOUT pin			30	65	Ω
I _{IN_VOUT}	Bias current into VOUT pin	EN = V _{IN} , V _{OUT} = 2V / 2.8V, CTRL = GND		T _A = 25°C	40	660	nA
				T _A = −40°C to 85°C		1570	
LOAD OUTPUT (LOAD)							
R _{LOAD}	High side MOSFET on-resistance	I _{LOAD} = 50mA, CTRL = V _{IN} , V _{OUT} = 2.0V / 2.8V, 2.2 V ≤ V _{IN} ≤ 5.5V			0.6	1.25	Ω
R _{DSCH_LOAD}	Low side MOSFET on-resistance	CTRL = GND, 2.2V ≤ V _{IN} ≤ 5.5V, I _{LOAD} = - 10mA			30	65	
t _{Rise_LOAD}	V _{LOAD} rise time	Starting with CTRL low to high transition, time to ramp V _{LOAD} from 0V to 95%, V _{OUT} = 1.8V / 2.6V, 2.2V ≤ V _{IN} ≤ 5.5V, I _{LOAD} = 1mA, T _A = 25°C			315	800	μs

Electrical Characteristics (continued)

 $V_{IN} = 3.6V$, $T_A = -40^{\circ}C$ to $85^{\circ}C$, typical values are at $T_A = 25^{\circ}C$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT	
AUTO 100% MODE TRANSITION							
V _{TH_100+}	Auto 100% Mode exit detection threshold ⁽¹⁾	Rising V _{IN} ,100% Mode is left with V _{IN} = V _{OUT} + V _{TH_100+} , max value at T _J = 85°C	170	250	340	mV	
V _{TH_100-}	Auto 100% Mode enter detection threshold ⁽¹⁾	Falling V _{IN} , 100% Mode is entered with V _{IN} = V _{OUT} + V _{TH_100-} , max value at T _J = 85°C	110	200	280		
OUTPUT							
t _{Startup_delay}	Regulator start up delay time	From transition EN = low to high until device starts switching		10	25	ms	
t _{Softstart}	Softstart time with reduced switch current limit	2.2V ≤ V _{IN} ≤ 5.5V, EN = V _{IN}		400	1200	μs	
I _{LIM_softstart}	High side MOSFET switch current limit	Reduced switch current limit during softstart	80	150	200	mA	
	Low side MOSFET switch current limit		150				
V _{VOU} T	Output voltage range	Output voltages are selected with pins VSEL1, VSEL2, VSEL3	TPS82740A		1.8	2.5	V
			TPS82740B		2.6	3.3	
	Output voltage accuracy	I _{OUT} = 10mA, V _{OUT} = 1.8V / 2.6V	-2.5	0	2.5	%	
		I _{OUT} = 100mA, V _{OUT} = 1.8V / 2.6V	-2	0	2		
	DC output voltage load regulation	V _{OUT} = 1.8V / 2.6V, CTRL = V _{IN}	0.001			%/mA	
DC output voltage line regulation	V _{OUT} = 1.8V / 2.6V, CTRL = V _{IN} , I _{OUT} = 10 mA, 2.5V ≤ V _{IN} ≤ 5.5V	0			%/V		

- (1) V_{IN} is compared to the programmed output voltage (V_{OUT}). When $V_{IN} - V_{OUT}$ falls below V_{TH_100-} , the device enters 100% Mode by turning the high side MOSFET on. 100% Mode is exited when $V_{IN} - V_{OUT}$ exceeds V_{TH_100+} and the device starts switching. The hysteresis for the 100% Mode detection threshold $V_{TH_100+} - V_{TH_100-}$ is always positive and 50 mV(typ.)

8.6 Typical Characteristics

TABLE OF GRAPHS			FIGURE
η	Efficiency	vs Output Current	Figure 3, Figure 4, Figure 5, Figure 6
η	Efficiency	vs Input Voltage	Figure 7, Figure 8, Figure 9, Figure 10
V_{OUT}	Output voltage	vs Output current	Figure 11, Figure 12, Figure 13, Figure 14
I_Q	Operating quiescent current	vs Input voltage	Figure 1
I_{SD}	Shutdown current	vs Input voltage	Figure 2
	Automatic Transition into 100% Mode		Figure 18, Figure 19, Figure 20
F_{SW}	Switching frequency	vs Output current	Figure 15, Figure 16, Figure 17
	Line and Load Transient Performance		Figure 21, Figure 22, Figure 23, Figure 24, Figure 25, Figure 26, Figure 27, Figure 28, Figure 29, Figure 30
	AC load regulation performance		Figure 31, Figure 32
LOAD	LOAD Output Behavior		Figure 33, Figure 34, Figure 35
	Input Voltage Ramp up / down		Figure 36, Figure 37, Figure 38, Figure 39

Typical Characteristics (continued)

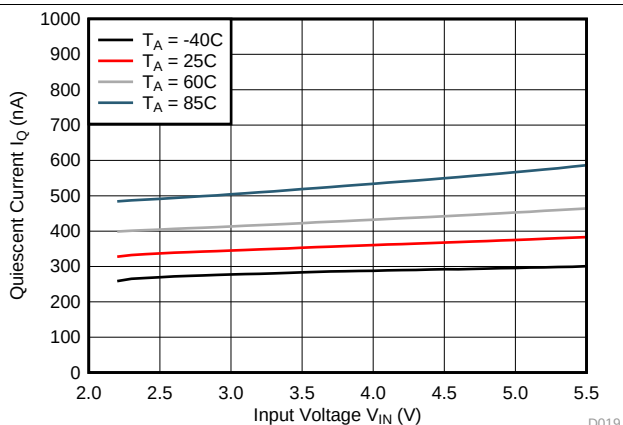


Figure 1. TPS82740 Quiescent Current I_Q

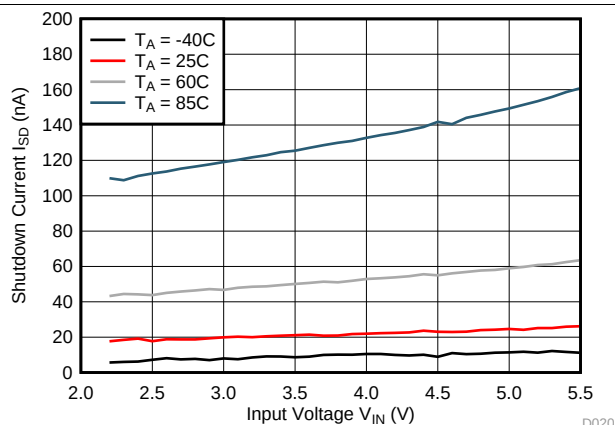


Figure 2. TPS82740 Shutdown current I_{SD}

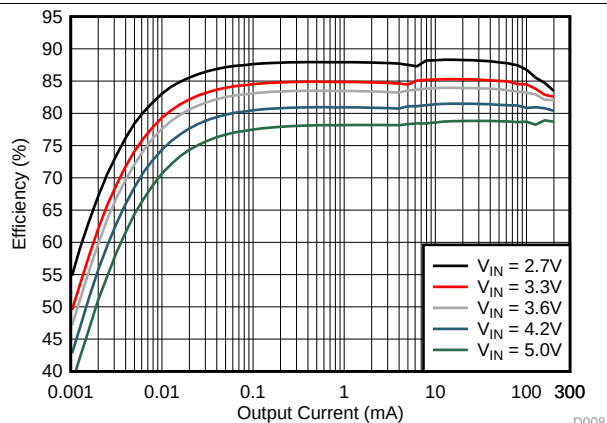


Figure 3. TPS82740A Efficiency $V_{OUT} = 1.8V$

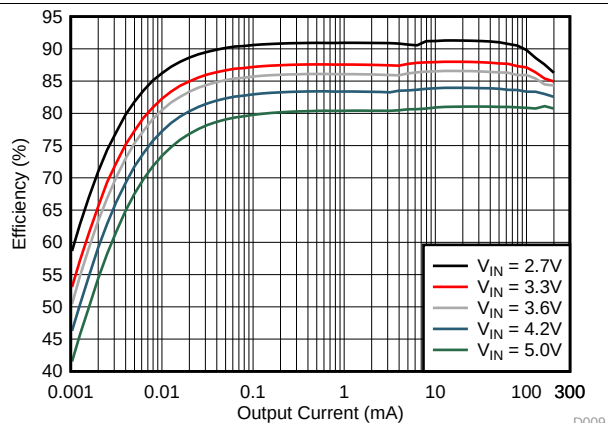


Figure 4. TPS82740A Efficiency $V_{OUT} = 2.1V$

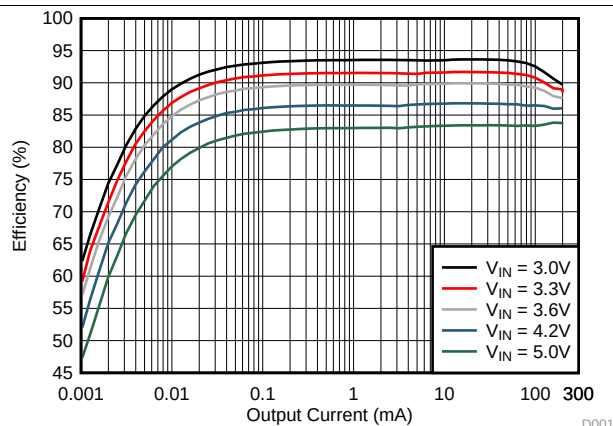


Figure 5. TPS82740B Efficiency $V_{OUT} = 2.6V$

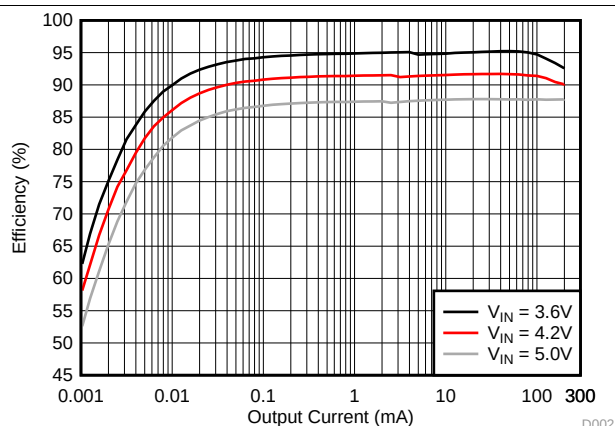
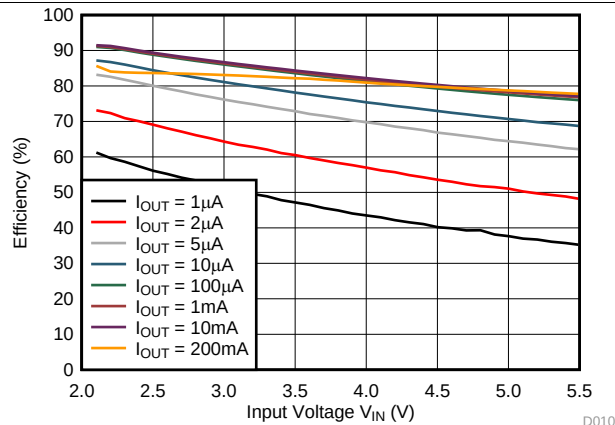
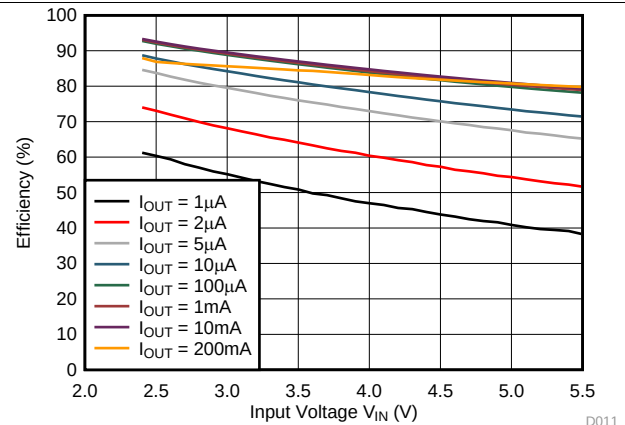
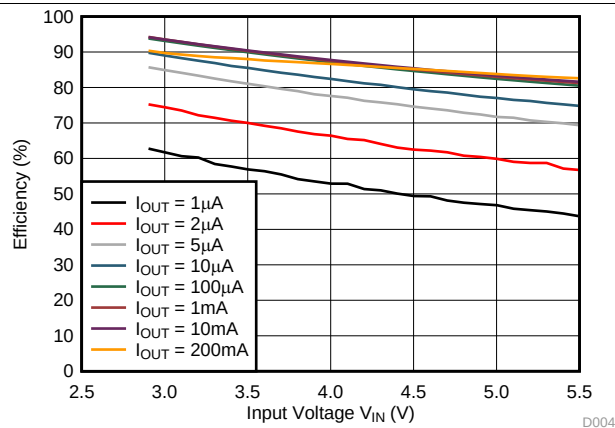
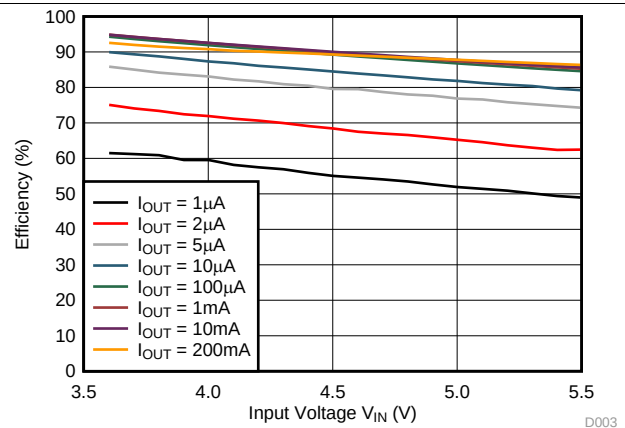
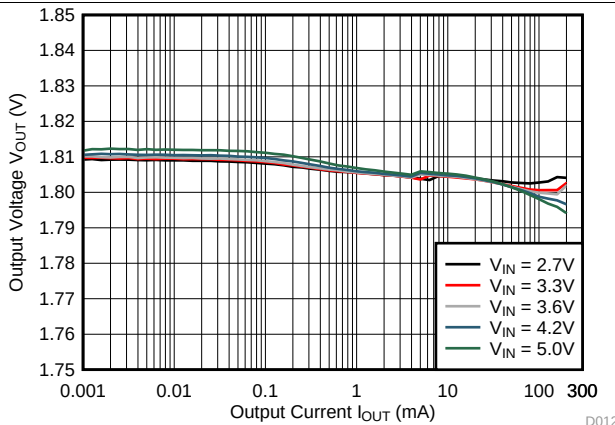
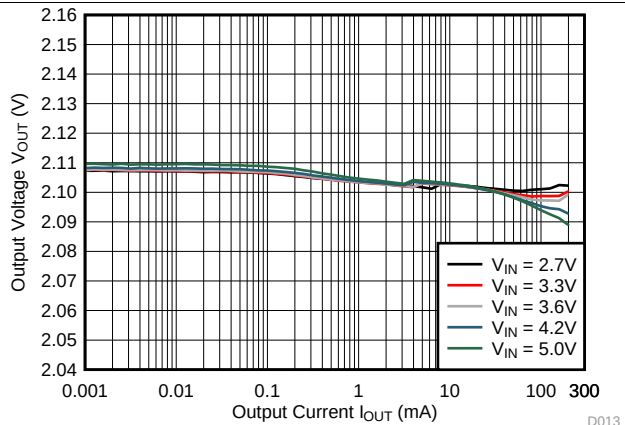
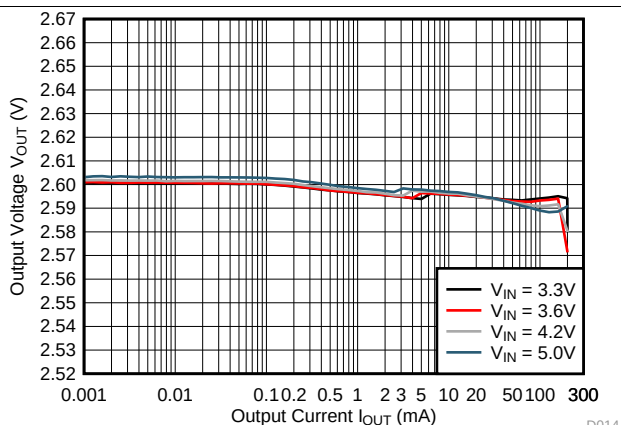


Figure 6. TPS82740B Efficiency $V_{OUT} = 3.3V$

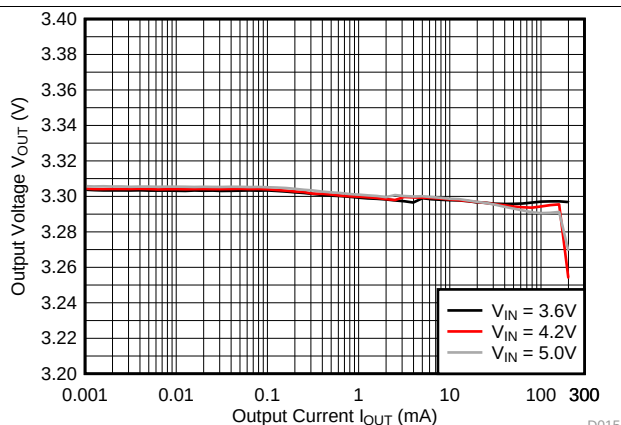
Typical Characteristics (continued)

Figure 7. TPS82740A Efficiency $V_{OUT} = 1.8V$

Figure 8. TPS82740A Efficiency $V_{OUT} = 2.1V$

Figure 9. TPS82740B Efficiency $V_{OUT} = 2.6V$

Figure 10. TPS82740B Efficiency $V_{OUT} = 3.3V$

Figure 11. TPS82740A Output voltage $V_{OUT} = 1.8V$

Figure 12. TPS82740A Output voltage $V_{OUT} = 2.1V$

Typical Characteristics (continued)



CTRL = GND

Figure 13. TPS82740B Output voltage $V_{OUT} = 2.6V$



CTRL = GND

Figure 14. TPS82740B Output voltage $V_{OUT} = 3.3V$

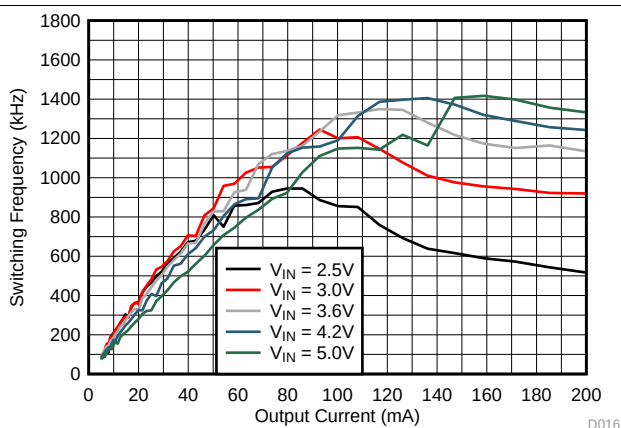


Figure 15. TPS82740A Switching frequency $V_{OUT} = 1.8V$

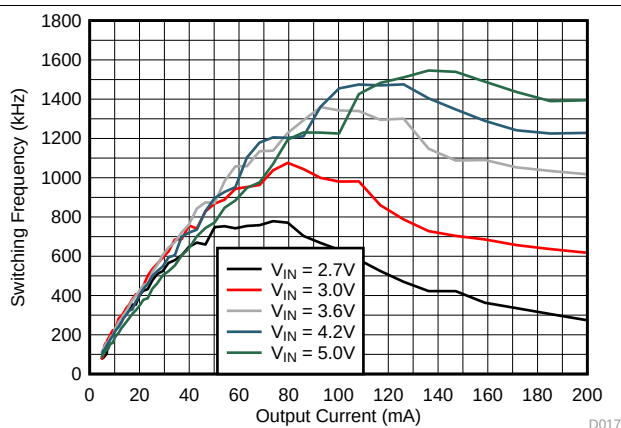


Figure 16. TPS82740A Switching frequency $V_{OUT} = 2.1V$

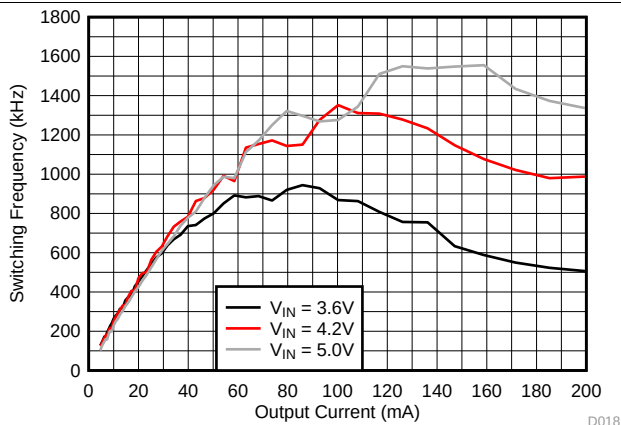


Figure 17. TPS82740B switching frequency $V_{OUT} = 3.0V$

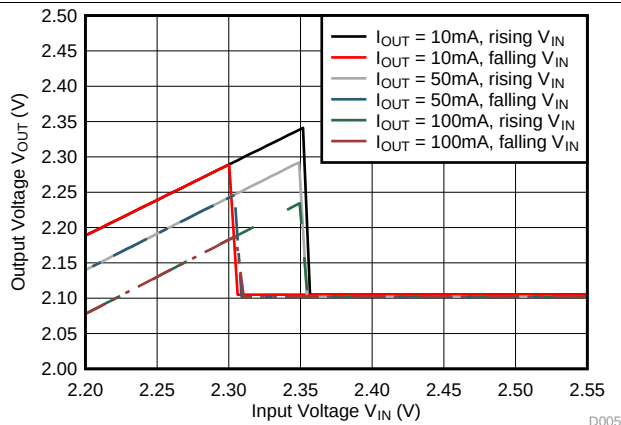


Figure 18. TPS82740A 100% Mode Transition $V_{OUT} = 2.1V$

Typical Characteristics (continued)

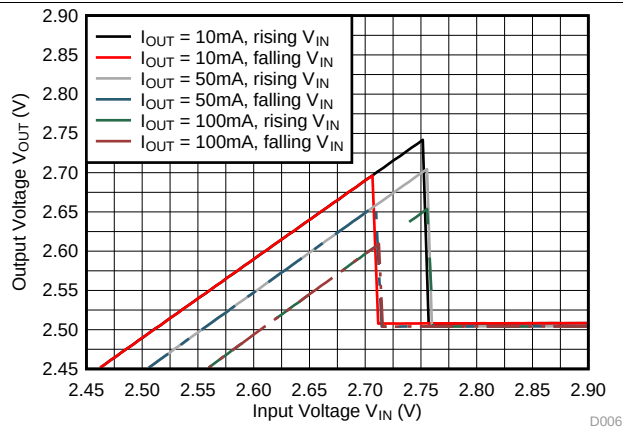


Figure 19. TPS82740A 100% Mode Transition $V_{OUT} = 2.5V$

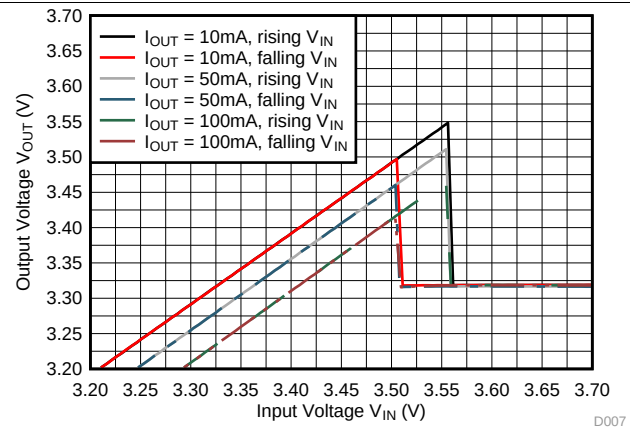


Figure 20. TPS82740B 100% Mode Transition $V_{OUT} = 3.3V$

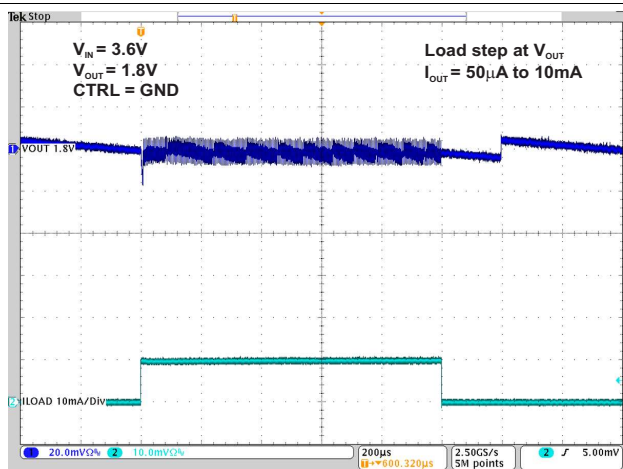


Figure 21. TPS82740A Load Transient Response $V_{OUT} = 1.8V$

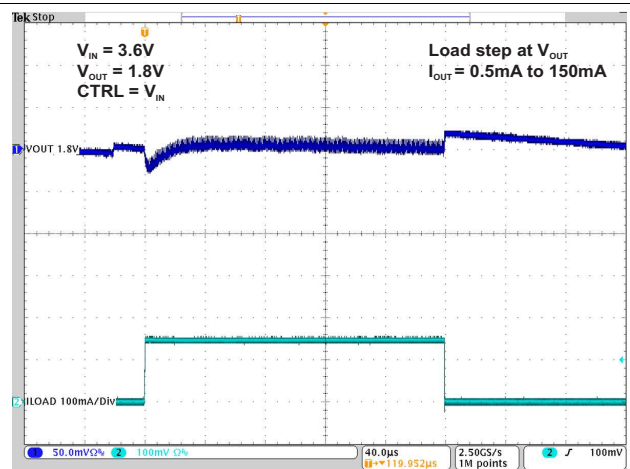


Figure 22. TPS82740A Load Transient Response $V_{OUT} = 1.8V$

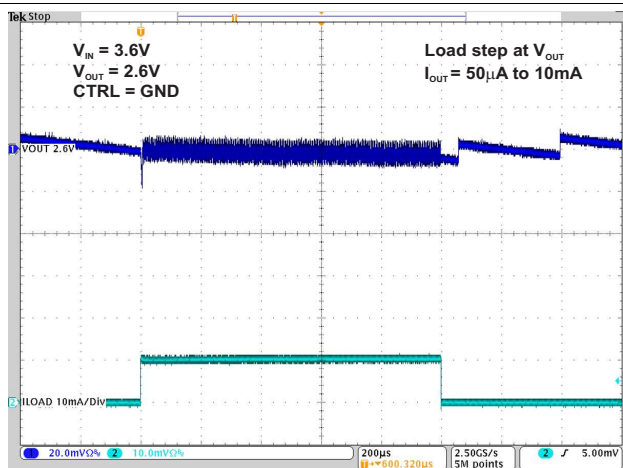


Figure 23. TPS82740B Load Transient Response $V_{OUT} = 2.6V$

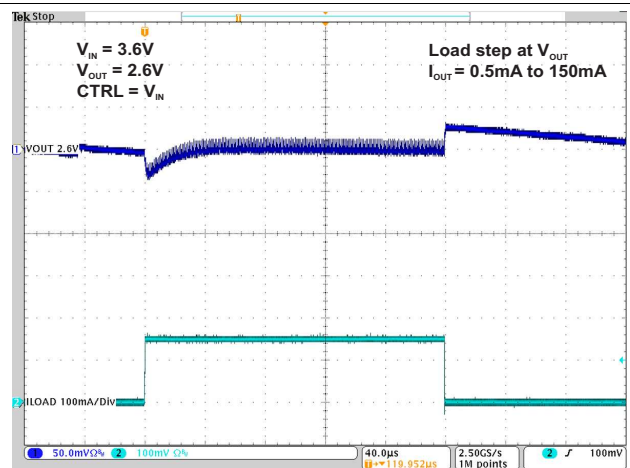


Figure 24. TPS82740B Load Transient Response $V_{OUT} = 2.6V$

Typical Characteristics (continued)

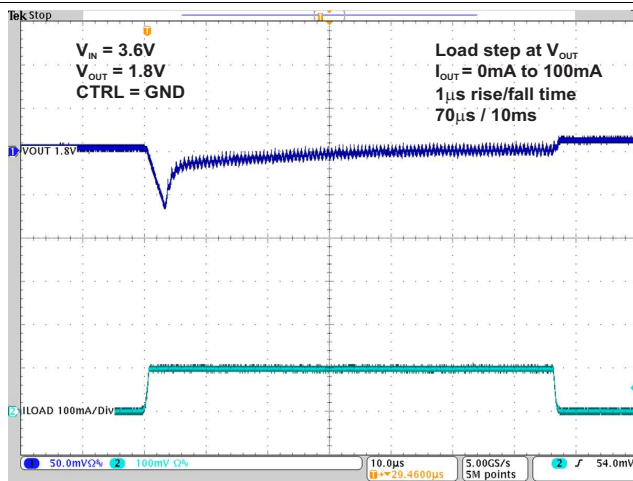


Figure 25. TPS82740A Load Transient Response $V_{OUT} = 1.8V$

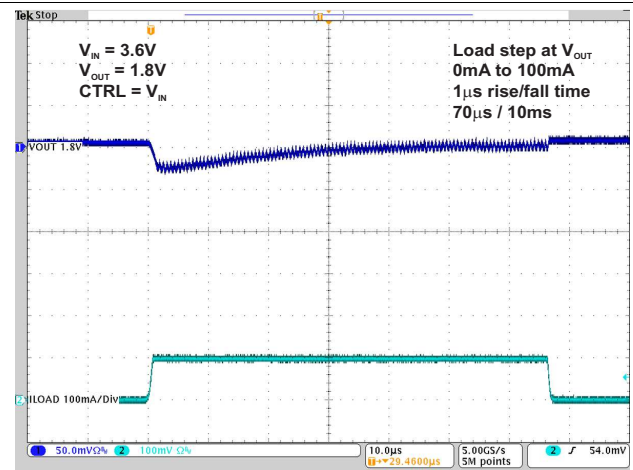


Figure 26. TPS82740A Load Transient Response $V_{OUT} = 1.8V$

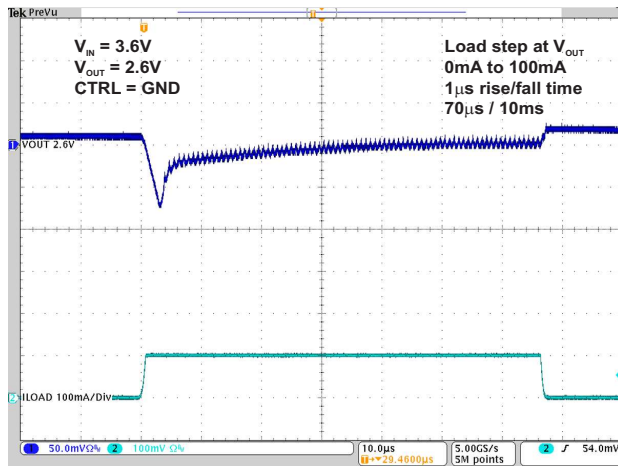


Figure 27. TPS82740B Load Transient Response $V_{OUT} = 2.6V$

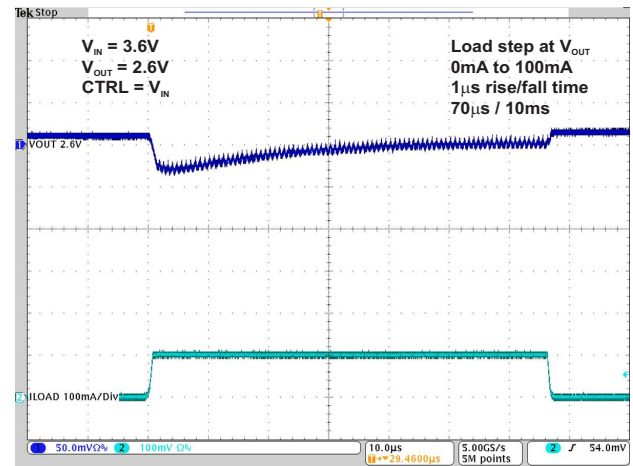


Figure 28. TPS82740B Load Transient response $V_{OUT} = 2.6V$

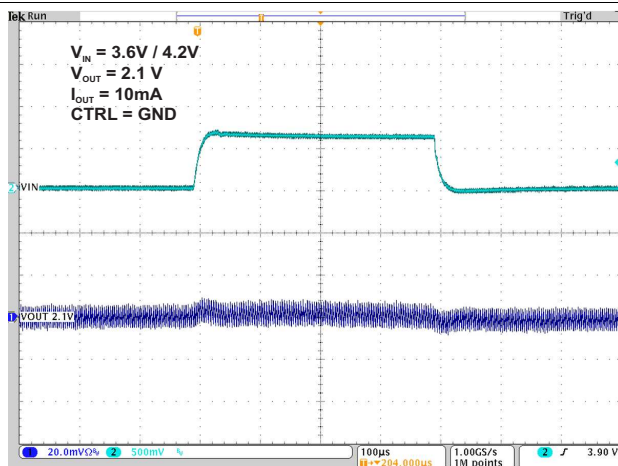


Figure 29. TPS82740A Line Transient Response
 $I_{OUT} = 10mA$

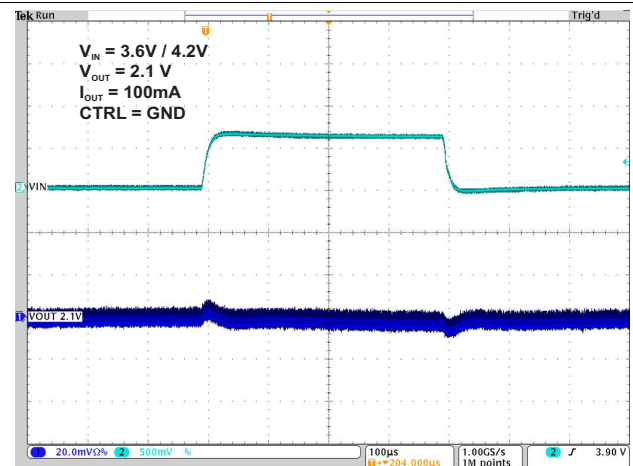
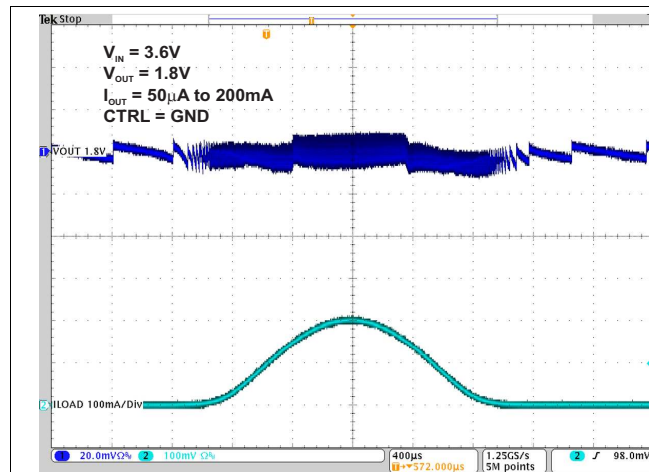
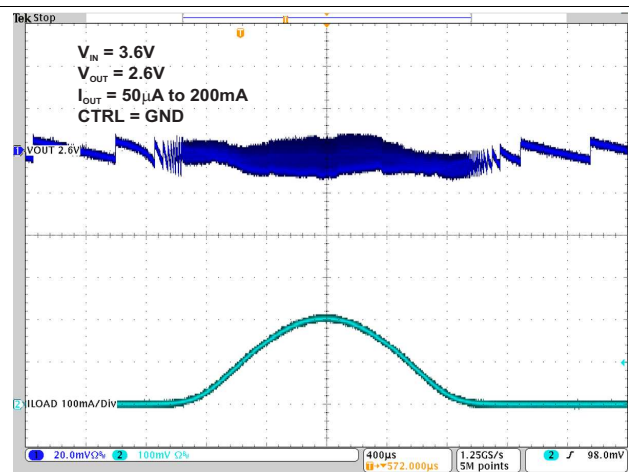
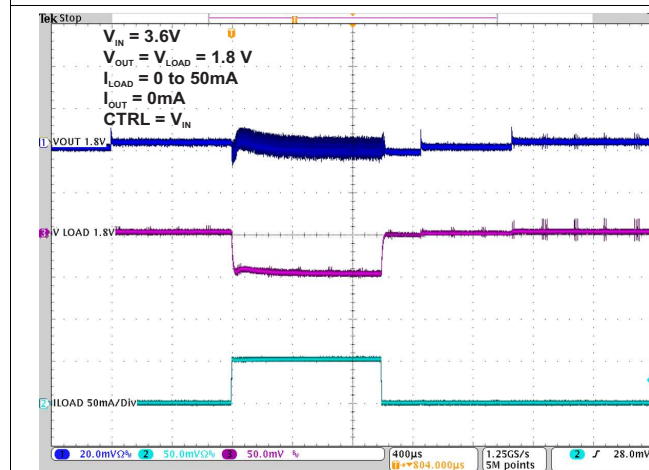
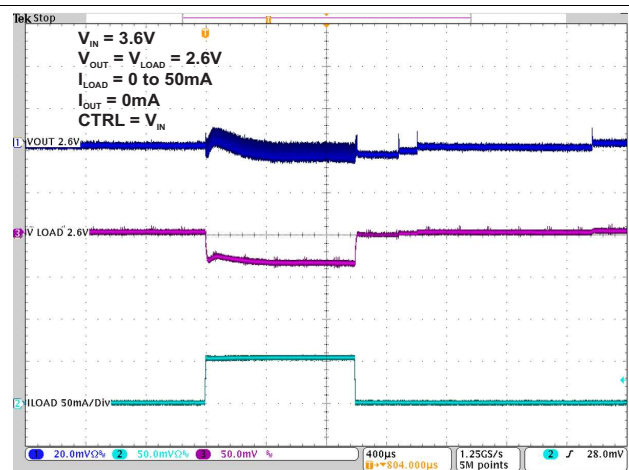
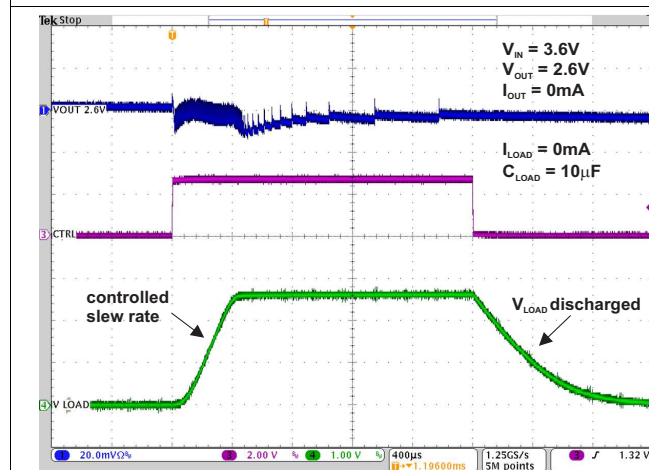
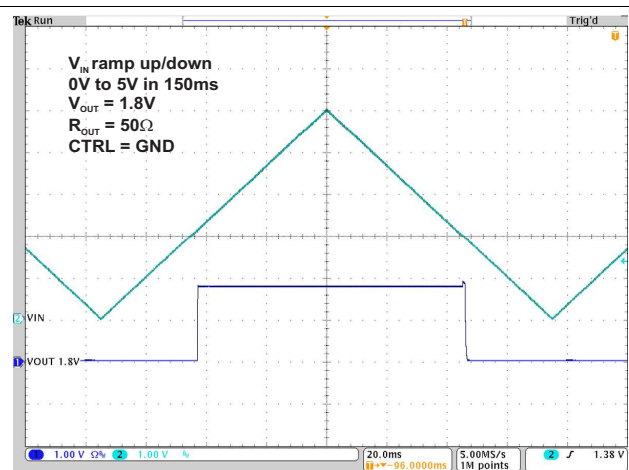


Figure 30. TPS82740A Line Transient Response
 $I_{OUT} = 100mA$

Typical Characteristics (continued)

Figure 31. TPS82740A AC Load Sweep $V_{OUT} = 1.8V$

Figure 32. TPS82740B AC Load Sweep $V_{OUT} = 2.6V$

Figure 33. TPS82740A Load Step at LOAD Output

Figure 34. TPS82740B Load Step at LOAD Output

Figure 35. TPS82740B Load Output ON / OFF

Figure 36. TPS82740A Input Voltage Ramp Up / Down

Typical Characteristics (continued)

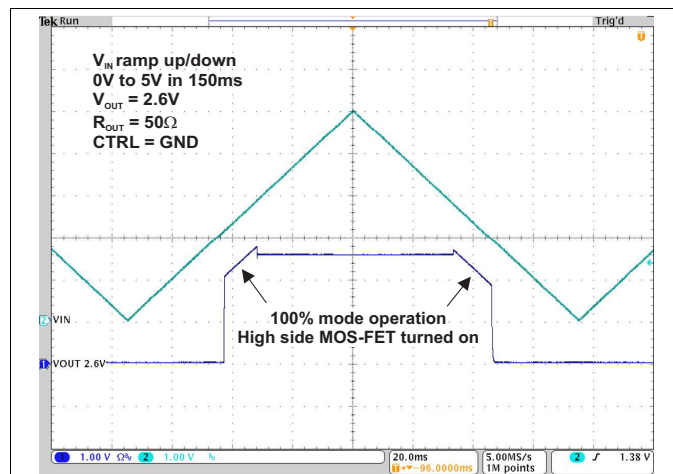


Figure 37. TPS82740B Input Voltage Ramp Up / Down

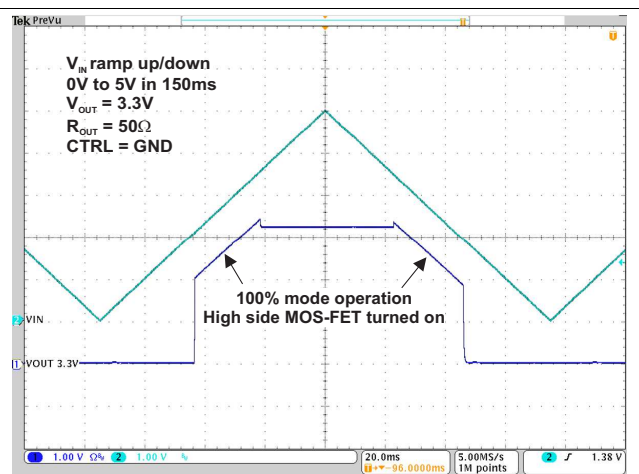


Figure 38. TPS82740B Input Voltage Ramp Up / Down


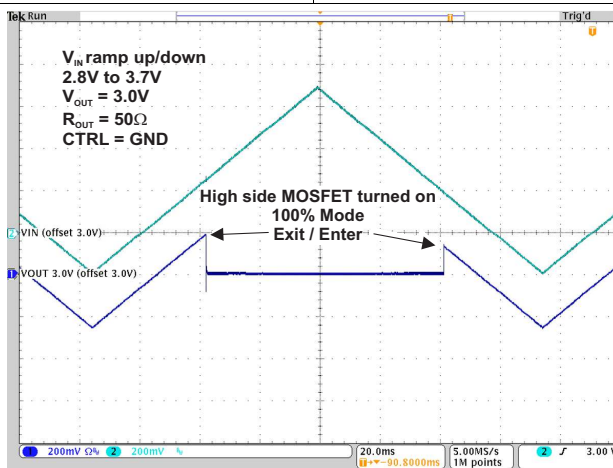


Figure 39. TPS82740B Enter / Exit 100% Mode Operation

9 Parameter Measurement Information

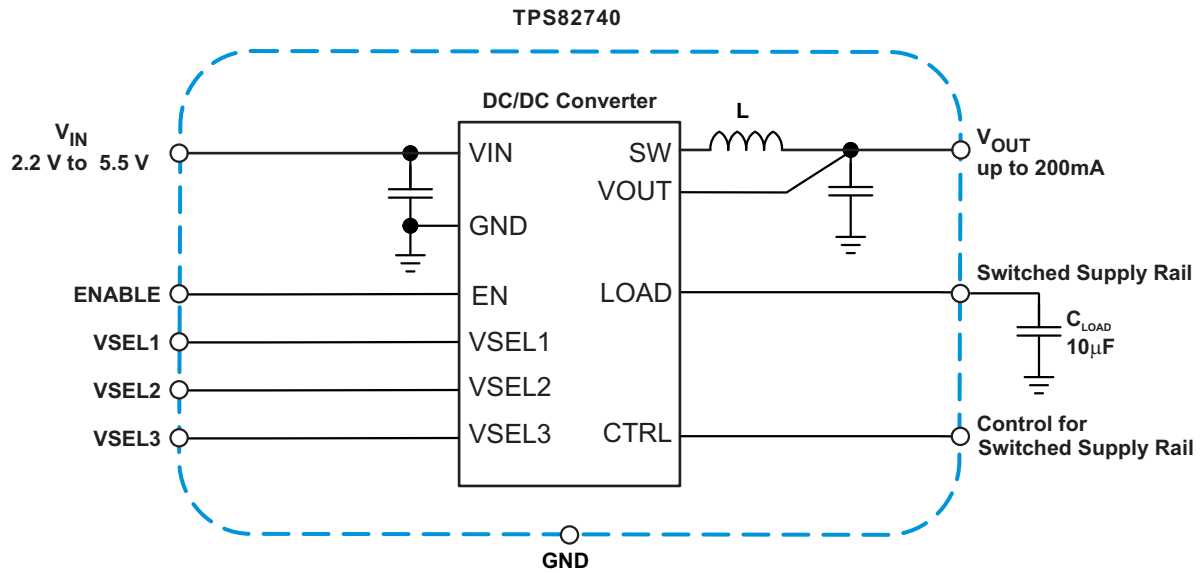


10 Detailed Description

10.1 Overview

The TPS82740 is the first fully integrated step down converter module with an ultra low quiescent current consumption (360nA typ.) while maintaining a regulated output voltage and featuring TI's DCS-Control™ topology. The device extends high efficiency operation to output currents down to a few micro amperes.

10.2 Functional Block Diagram

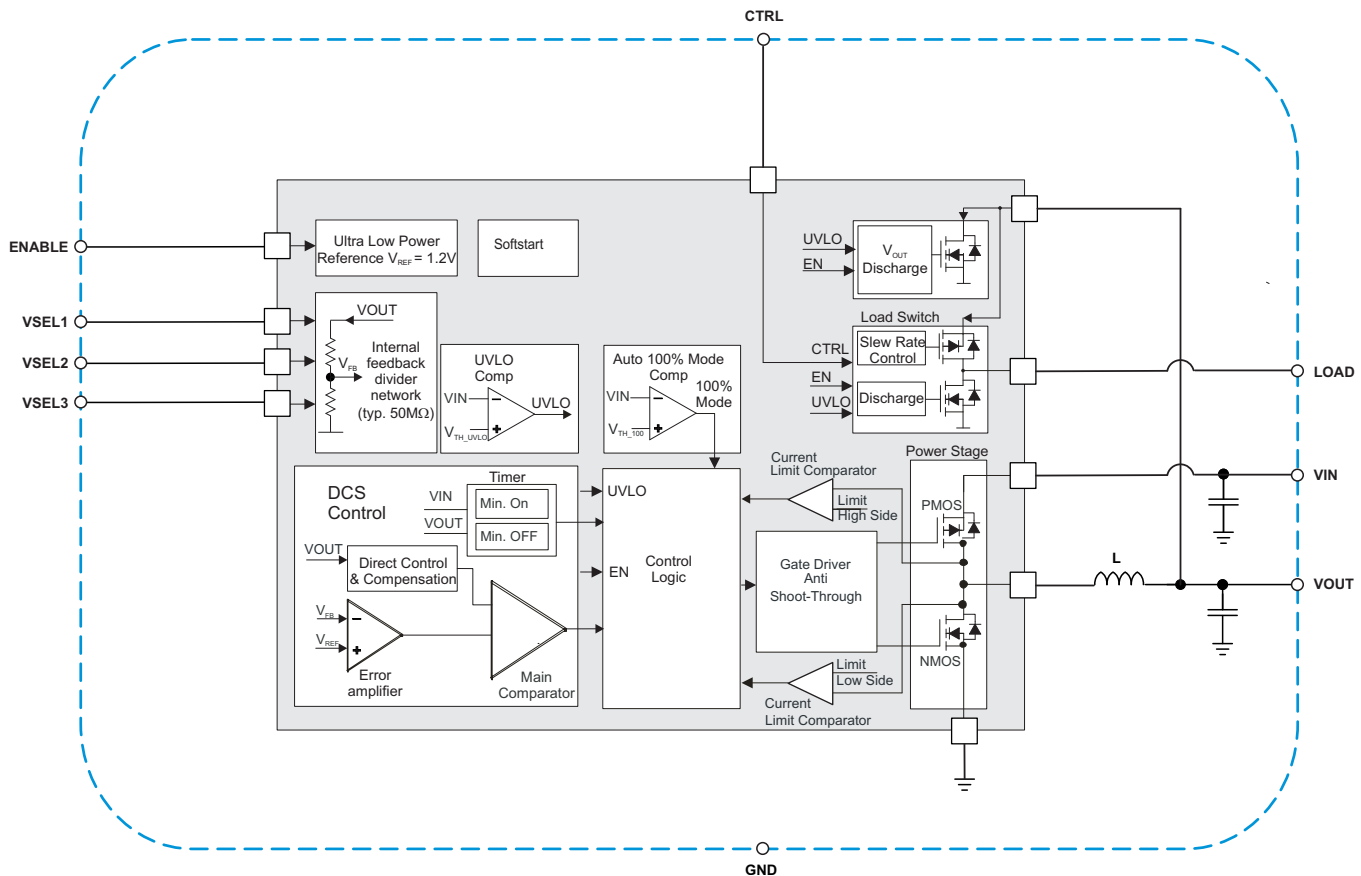

10.3 Feature Description

10.3.1 DCS-Control™

TI's DCS-Control™ (Direct Control with Seamless Transition into Power Save Mode) is an advanced regulation topology, which combines the advantages of hysteretic and voltage mode control. Characteristics of DCS-Control™ are excellent AC load regulation and transient response, low output ripple voltage and a seamless transition between PFM and PWM mode operation. DCS-Control™ includes an AC loop which senses the output voltage (VOUT pin) and directly feeds the information to a fast comparator stage. This comparator sets the switching frequency, which is constant for steady state operating conditions, and provides immediate response to dynamic load changes. In order to achieve accurate DC load regulation, a voltage feedback loop is used.

The DCS-Control™ topology supports PWM (Pulse Width Modulation) mode for medium and high load conditions and Power Save Mode at light loads. During PWM mode, it operates in continuous conduction. The switching frequency goes up to 1.7MHz with a controlled frequency variation depending on the input voltage. If the load current decreases, the converter seamlessly enters Power Save Mode to maintain high efficiency down to very light loads. In Power Save Mode, the switching frequency varies nearly linearly with the load current. Since DCS-Control™ supports both operation modes within one single building block, the transition from PWM to Power Save Mode is seamless without effects on the output voltage. The TPS82740 offers both excellent DC

Feature Description (continued)

voltage and superior load transient regulation, combined with very low output voltage ripple, minimizing interference with RF circuits. At high load currents, the converter operates in quasi fixed frequency PWM mode operation and at light loads in PFM (Pulse Frequency Modulation) mode to maintain highest efficiency over the full load current range. In PFM Mode, the device generates a single switching pulse to ramp up the inductor current and recharge the output capacitor, followed by a sleep period where most of the internal circuits are shutdown to achieve the lowest quiescent current. During this time, the load current is supported by the output capacitor. The duration of the sleep period depends on the load current and the inductor peak current.

During the sleep periods, the quiescent current of the TPS82740 is reduced to 360nA. This low quiescent current consumption is achieved by an ultra low power voltage reference, an integrated high impedance (typ. 50MΩ) feedback divider network and an optimized DCS-Control™ block.

10.3.2 LOAD Switch

The LOAD pin can be used to power an additional, temporarily used sub-system. If the CTRL pin is set high, the LOAD pin is connected to the VOUT pin via an integrated load switch. The load switch is slew rate controlled to support soft switching and not impacting the regulated output VOUT. If the CTRL pin is set to low, the LOAD pin is disconnected from the VOUT pin and internally connected to GND by an internal discharge switch. The CTRL pin can be controlled by a micro controller and must be terminated. With CTRL pin high, the quiescent current is increased to improve the transient response.

10.3.3 Output Voltage Selection (VSEL1, VSEL2, VSEL3)

The TPS82740 provides an integrated, high impedance (typ. 50MΩ) feedback resistor divider network which is programmed by the pins VSEL1-3. The TPS82740A supports an output voltage range of 1.8V to 2.5V in 100mV steps, while the TPS82740B supports an output voltage range from 2.6V to 3.3V in 100mV steps. The output voltage can be changed during operation and supports a simple dynamic output voltage scaling, shown in [Figure 44](#). The output voltage is programmed according to [Table 2](#) and [Table 3](#).

10.3.4 Output Discharge Function (VOUT and LOAD)

Both the VOUT pin and the LOAD pin feature a discharge circuit to connect each rail to GND, once they are disabled. This feature prevents residual charge voltages on capacitors connected to these pins, which may impact proper power up of the main- and sub-system. With the CTRL pin pulled low, the discharge circuit at the LOAD pin activates. With the EN pin pulled low, the discharge circuit at the pin VOUT activates.

10.3.5 Internal Current Limit

The TPS82740 integrates a current limit in the high side, as well as in the low side MOSFETs to protect the device against overload or short circuit conditions. The peak current in the switches is monitored cycle by cycle. If the high side MOSFET current limit is reached, the high side MOSFET is turned off and the low side MOSFET is turned on until the current decreases below the low side MOSFET current limit.

Table 4. Load Pin Condition Table

Pin condition			Operating condition	Remark
LOAD	EN	CTRL	VIN	
Connected to VOUT	high	high	$> V_{UVLO}$	load switch enabled and slew rate controlled
Connected to GND	high	low	$> V_{UVLO}$	load switch turned off
	low	high or low	$> V_{UVLO}$	device and load switch disabled
	high	high	$< V_{UVLO}$	device disabled due to UVLO

10.3.6 CTRL / DVS (Dynamic Voltage Scaling TPS62741)

In TPS62741, the CTRL pin controls beside the load switch as well Dynamic Voltage Scaling. The CTRL pin selects between two different voltage setting banks. The voltage of each bank are set with the VSEL pins 1-4 according to .

The output LOAD is controlled with the CTRL pin. The pin is internally connected either to VOUT pin or GND and can be used to power up/down temporarily used external circuits to reduce leakage current consumption of the system.

10.4 Device Functional Modes

10.4.1 Enable / Shutdown

The TPS82740 is activated when the EN pin is set high. For proper operation, the pin must be terminated and must not be left floating. With the EN pin set low, the device enters shutdown mode with less than typ. 70nA current consumption.

10.4.2 Softstart

When the device is enabled, the internal reference is powered up and after the startup delay time $t_{Startup_delay}$ has expired, the device enters softstart, starts switching and ramps up the output voltage. During softstart, the device operates with a reduced current limit, $I_{LIM_softstart}$, of typ. 1/3 of the nominal current limit. This reduced current limit is active during the time $t_{Softstart}$. The current limit is increased to its nominal value, I_{LIMF} , once this time has expired or the nominal output voltage is reached.

10.4.3 POWER GOOD OUTPUT (PG)

The Power Good comparator features an open drain output. The PG comparator is active with EN pin set to high and V_{IN} is above the threshold V_{TH_UVLO+} . It is driven to high impedance once V_{OUT} trips the threshold V_{TH_PG+} for rising V_{OUT} . The output is pulled to low level once V_{OUT} falls below the PG hysteresis, V_{PG_hys} . The output is also pulled to low level in case the input voltage V_{IN} falls below the undervoltage lockout threshold V_{TH_UVLO-} or the device is disabled with EN = low. The power good output (PG) can be used as an indicator for the system to signal that the converter has started up and the output voltage is in regulation.

Table 5. PG condition table

Pin condition			Operating condition			Remark
PG	EN	CTRL	IOUT / ILOAD	VIN	VOUT	
hiz	high	high	don't care	$> V_{UVLO}$	$V_{OUT} > V_{TH_PG+}$	PG comparator active, pull up resistor pulls PG to high
hiz	high	low	medium load ($> 1mA$)	$> V_{UVLO}$	$V_{OUT} > V_{TH_PG+}$	PG comparator active, pull up resistor pulls PG to high
hiz	high	low	light load ($< 1mA$)	$> V_{UVLO}$	$V_{OUT} > V_{TH_PG+}$	PG comparator disabled for low Iq operation, pull up resistor pulls PG to high
low	high	don't care	$0mA < I_{OUT} < 100mA$	$> V_{UVLO}$	$V_{OUT} < V_{TH_PG-}$	startup, overload or ramp down
low	low	don't care	output disabled	$V_{IN} > 1.2V$	$V_{OUT} = 0$	device disabled
low	high	don't care	output disabled	$< V_{UVLO}$	VOUT not present	device disabled, due to UVLO

Table 6. VOUT Output Discharge Condition Table

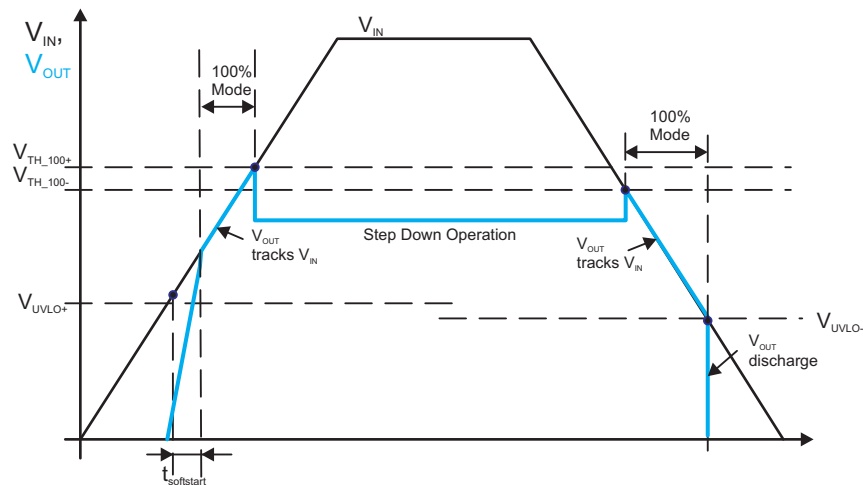
VOUT pin	EN	VIN condition	remark
connected to GND, output discharged	low	$1.5V < V_{IN} < V_{UVLO}$	
connected to GND, output discharged	high	$< V_{UVLO}$	

Table 6. VOUT Output Discharge Condition Table (continued)

VOUT pin	EN	VIN condition	remark
hiz, discharge switch disabled	high	$> V_{UVLO}$	during regulator start up, the discharge switch is enabled and VOUT pulled to low, until the regulator start up time t_{Start} expires. During the softstart time and later, the discharge switch is disabled.

10.4.4 Automatic Transition into 100% Mode

Once the input voltage comes close to the output voltage, the TPS82740 stops switching and enters 100% duty cycle operation. It connects the output VOUT via the inductor and the internal high side MOSFET switch to the input VIN, once the input voltage V_{IN} falls below the 100% mode enter threshold, V_{TH_100-} . In 100% mode switching stops eliminating output voltage ripple. Because the output is connected to the input, the output voltage tracks the input voltage minus the voltage drop across the internal high side switch and the inductor caused by the output current. Once the input voltage increases and trips the 100% mode exit threshold, V_{TH_100+} , the TPS82740 turns on and starts switching again. See Figure 40, Figure 18, Figure 19 and Figure 20.


Figure 40. Automatic Transition into 100% Mode


11 Application and Implementation

11.1 Application Information

The device is designed to operate from an input voltage supply range between 2.2V and 5.5V with a maximum output current of 200mA. Once the input voltage comes close to the output voltage, the DC/DC converter stops switching and enters 100% duty cycle operation. The integrated slew rate controlled load switch can distribute the selected output voltage to a temporarily used sub-system. The TPS82740 module operates in PWM mode for medium and high load conditions and in power save mode at light load currents.

At high load currents, the converter operates in quasi fixed frequency PWM mode operation. The switching frequency is up to 1.7MHz with a controlled frequency variation depending on the input voltage. If the load current decreases, the converter seamlessly enters Power Save Mode by varying the switching frequency linearly to maintain high efficiency over the full load current range. At very light load conditions the device generates a single switching pulse to ramp up the inductor current and recharge the output capacitor, followed by a sleep period where most of the internal circuits are shutdown to achieve 360nA quiescent current consumption.

11.2 Typical Application

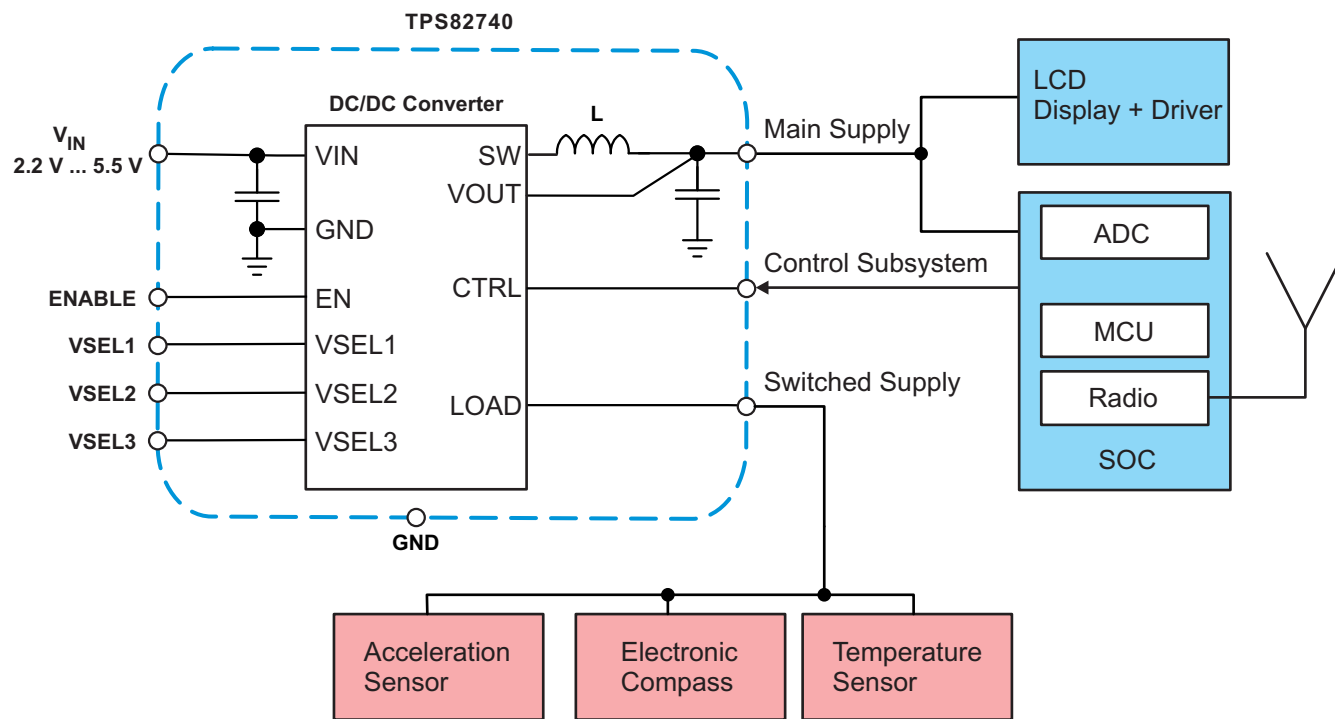

Example of Implementation in a SOC Based System

11.2.1 Design Requirements

TPS82740 is a complete step-down converter module including all passive components (inductor, input and output capacitor). For most applications no additional input / output capacitors are required. Use the following typical application design procedure to select additional external components in case further performance improvement of the module is desired.

11.2.2 Detailed Design Procedure

11.2.2.1 Input Capacitor Selection

For most applications, the integrated input capacitor at the VIN pin is sufficient.

Typical Application (continued)

TPS82740 uses a tiny ceramic input capacitor. When a ceramic capacitor is combined with trace or cable inductance, such as that from a wall adapter, a load step at the output can induce ringing at the VIN pin. This ringing can couple to the output and be mistaken as loop instability or can even damage the module. In this circumstance, additional ceramic 'bulk' capacitance, such as electrolytic or tantalum, should be placed between the input of the module and the power source lead to reduce ringing that occurs between the inductance of the power source leads and the module.

11.2.2.1.1 Input Buffer Capacitor Selection

In addition to the small ceramic input capacitor a larger buffer capacitor C_{Buf} is recommended to reduce voltage drops and ripple voltage. When using battery chemistries like Li-SOCl₂, Li-SO₂, Li-MnO₂, the impedance of the battery has to be considered. These battery types tend to increase their impedance depending on discharge status and often can support output currents of only a few mA. Therefore a buffer capacitor is recommended to stabilize the battery voltage during DC/DC operations e.g. for a RF transmission. A voltage drop on the input of the TPS82740 during DC/DC operation impacts the advantage of the step down conversion for system power reduction. Furthermore the voltage drops can fall below the minimum recommended operating voltage of the device and leads to an early system cut off. Both effects reduce the battery life time. To achieve best performance and to extract the most energy out of the battery a good procedure is to select the buffer capacitor value for an voltage drop below 50mVpp during DC/DC operation. The capacitor value strongly depends on the used battery type, as well the current consumption during a RF transmission as well the duration of the transmission.

11.2.2.2 Output Capacitor Selection

For most applications, the integrated output capacitor at the VOUT pin is sufficient.

In order to further reduce the output voltage ripple and improve the load transient performance an additional external output capacitance may be used. For most applications an additional 4.7μF or 10μF capacitor will be sufficient. Care should be taken that the total effective capacitance present at the output does not exceed 10μF in order to guarantee loop stability. Ceramic capacitors with low ESR values have the lowest output voltage ripple and are recommended.

At the LOAD output pin, no additional output capacitor is required. For applications demanding external capacitance connected to the LOAD pin, the total capacitance should not exceed 10μF.

11.2.3 Application Curves

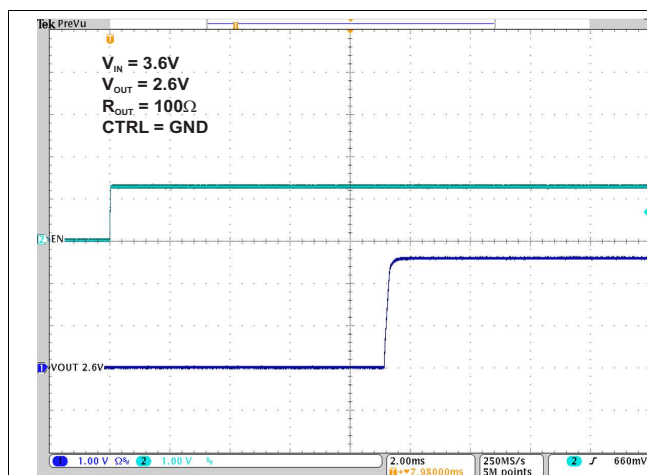


Figure 41. TPS82740B Device Enable and Start up

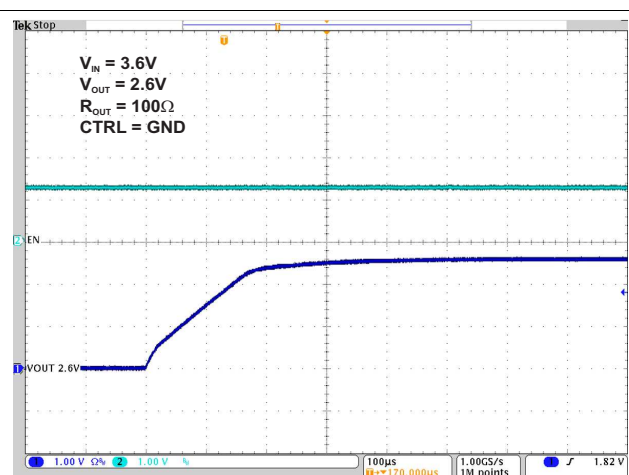


Figure 42. TPS82740B VOUT Ramp after Enable

Typical Application (continued)

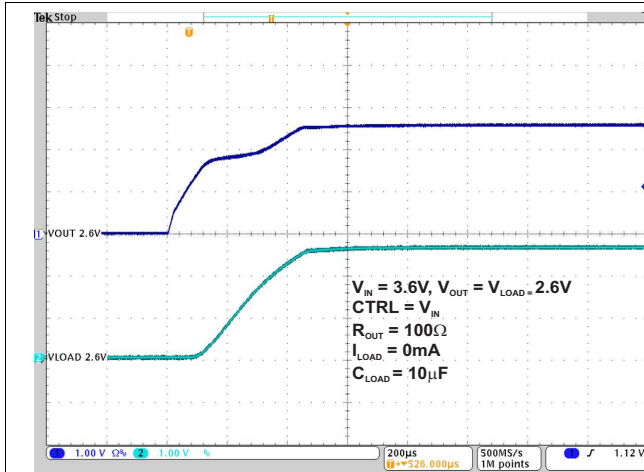
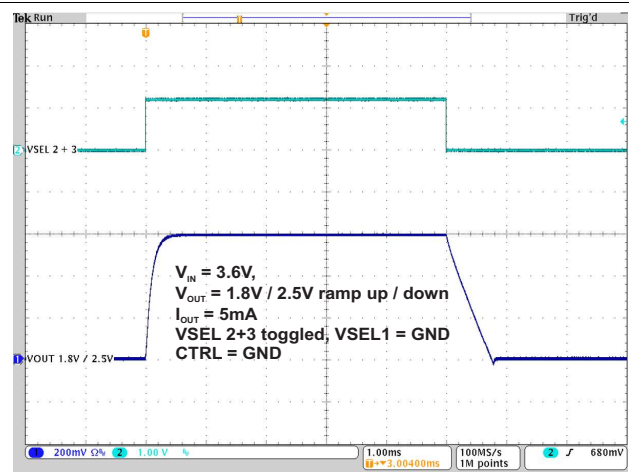


Figure 43. TPS82740B V_{OUT} Ramp with activated LOAD Switch



**Figure 44. TPS82740A Dynamic Output Voltage Scaling:
 $V_{OUT} = 1.8V / 2.5V$**

12 Power Supply Recommendations

The TPS82740 device is a complete and optimized power supply module working within the given specification range without additional components. Please use the information given in the Application Information section to connect the input and output circuitry appropriately.

13 Layout

13.1 Layout Guidelines

In making the pad size for the uSiP LGA balls, it is recommended that the layout use a non-solder-mask defined (NSMD) land. With this method, the solder mask opening is made larger than the desired land area, and the opening size is defined by the copper pad width. [Figure 45](#) shows the appropriate diameters for a MicroSiP™ layout. [Figure 46](#) shows a suggestion for the PCB layout.

13.2 Layout Example

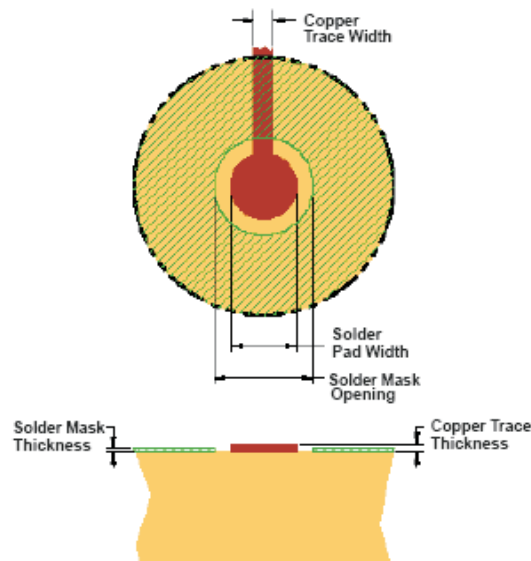


Figure 45. Recommended Land Pattern Image and Dimensions

SOLDER PAD DEFINITIONS ⁽¹⁾⁽²⁾⁽³⁾⁽⁴⁾	COPPER PAD	SOLDER MASK ⁽⁵⁾ OPENING	COPPER THICKNESS	STENCIL ⁽⁶⁾ OPENING	STENCIL THICKNESS
Non-solder-mask defined (NSMD)	0.30mm	0.360mm	1oz max (0.032mm)	0.34mm diameter	0.1mm thick

- (1) Circuit traces from non-solder-mask defined PWB lands should be 75µm to 100µm wide in the exposed area inside the solder mask opening. Wider trace widths reduce device stand off and affect reliability.
- (2) Best reliability results are achieved when the PWB laminate glass transition temperature is above the operating the range of the intended application.
- (3) Recommend solder paste is Type 3 or Type 4.
- (4) For a PWB using a Ni/Au surface finish, the gold thickness should be less than 0.5µm to avoid a reduction in thermal fatigue performance.
- (5) Solder mask thickness should be less than 20 µm on top of the copper circuit pattern.
- (6) For best solder stencil performance use laser cut stencils with electro polishing. Chemically etched stencils give inferior solder paste volume control.

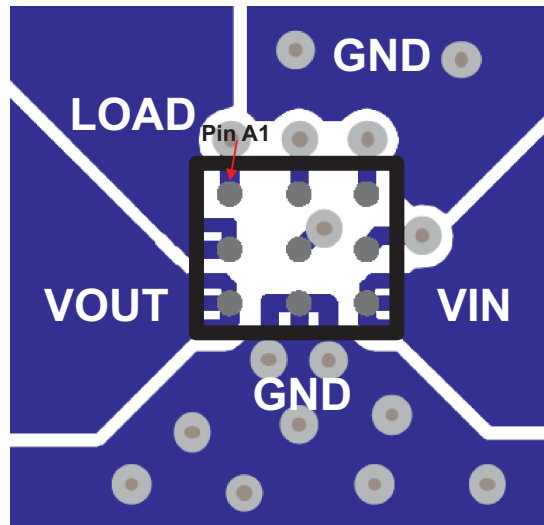


Figure 46. PCB Layout Suggestion

13.3 Surface Mount Information

The TPS82740 MicroSIP™ module uses an open frame construction for a fully automated assembly process and provides a large surface area for pick and place operations. See the "Pick Area" in the package drawing.

Package height and weight have been kept to a minimum, allowing MicroSIP™ device handling similar to a 0805 footprint component.

For reflow recommendations, see document J-STD-20 from the JEDEC/IPC standard.

14 器件和文档支持

14.1 文档支持

14.1.1 相关链接

以下表格列出了快速访问链接。范围包括技术文档、支持与社区资源、工具和软件，以及样片或购买的快速访问。

表 7. 相关链接

部件	产品文件夹	样片与购买	技术文档	工具与软件	支持与社区
TPS82740A	请单击此处	请单击此处	请单击此处	请单击此处	请单击此处
TPS82740B	请单击此处	请单击此处	请单击此处	请单击此处	请单击此处

14.2 商标

DCS-Control, MicroSIP are trademarks of Texas Instruments.
is a registered trademark of ~Bluetooth SIG, Inc..

14.3 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

14.4 术语表

[SLYZ022](#) — TI 术语表。

这份术语表列出并解释术语、首字母缩略词和定义。

15 机械封装和可订购信息

以下页中包括机械封装和可订购信息。 这些信息是针对指定器件可提供的最新数据。 这些数据会在无通知且不对本文档进行修订的情况下发生改变。 欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

重要声明

德州仪器(TI) 及其下属子公司有权根据 JESD46 最新标准, 对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内, 且 TI 认为 有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定, 否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予 的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从 TI 获得使用这些产品或服务 的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是 TI 的专利权或其它 知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况 下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时, 如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分, 则会失去相关 TI 组件 或服务的所有明示或暗示授权, 且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意, 尽管任何应用相关信息或支持仍可能由 TI 提供, 但他们将独力负责满足与其产品及其应用中使用的 TI 产品 相关的所有法律、法规和安全相关要求。客户声明并同意, 他们具备制定与实施安全措施所需的全部专业技术和知识, 可预见 故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因 在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中, 为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特 有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此, 此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III (或类似的生命攸关医疗设备) 的授权许可, 除非各方授权官员已经达成了专门管控此类使 用的特别协议。

只有那些 TI 特别注明属于军用等级或“增强型塑料”的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同 意, 对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用, 其风险由客户单独承担, 并且由客户独 力负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品, 这些产品主要用于汽车。在任何情况下, 因使用非指定产品而无法达到 ISO/TS16949 要求, TI 不承担任何责任。

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com.cn/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com.cn/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP应用处理器	www.ti.com.cn/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity	德州仪器在线技术支持社区	www.deyisupport.com

邮寄地址: 上海市浦东新区世纪大道1568号, 中建大厦32楼邮政编码: 200122
Copyright © 2015, 德州仪器半导体技术(上海)有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS82740ASIPR	ACTIVE	uSiP	SIP	9	3000	Green (RoHS & no Sb/Br)	Call TI	Level-2-260C-1 YEAR	-40 to 85	E7 TXI7400EC	Samples
TPS82740ASIPT	ACTIVE	uSiP	SIP	9	250	Green (RoHS & no Sb/Br)	Call TI	Level-2-260C-1 YEAR	-40 to 85	E7 TXI7400EC	Samples
TPS82740BSIPR	ACTIVE	uSiP	SIP	9	3000	Green (RoHS & no Sb/Br)	Call TI	Level-2-260C-1 YEAR	-40 to 85	E8 TXI2740EC	Samples
TPS82740BSIPT	ACTIVE	uSiP	SIP	9	250	Green (RoHS & no Sb/Br)	Call TI	Level-2-260C-1 YEAR	-40 to 85	E8 TXI2740EC	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.


(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

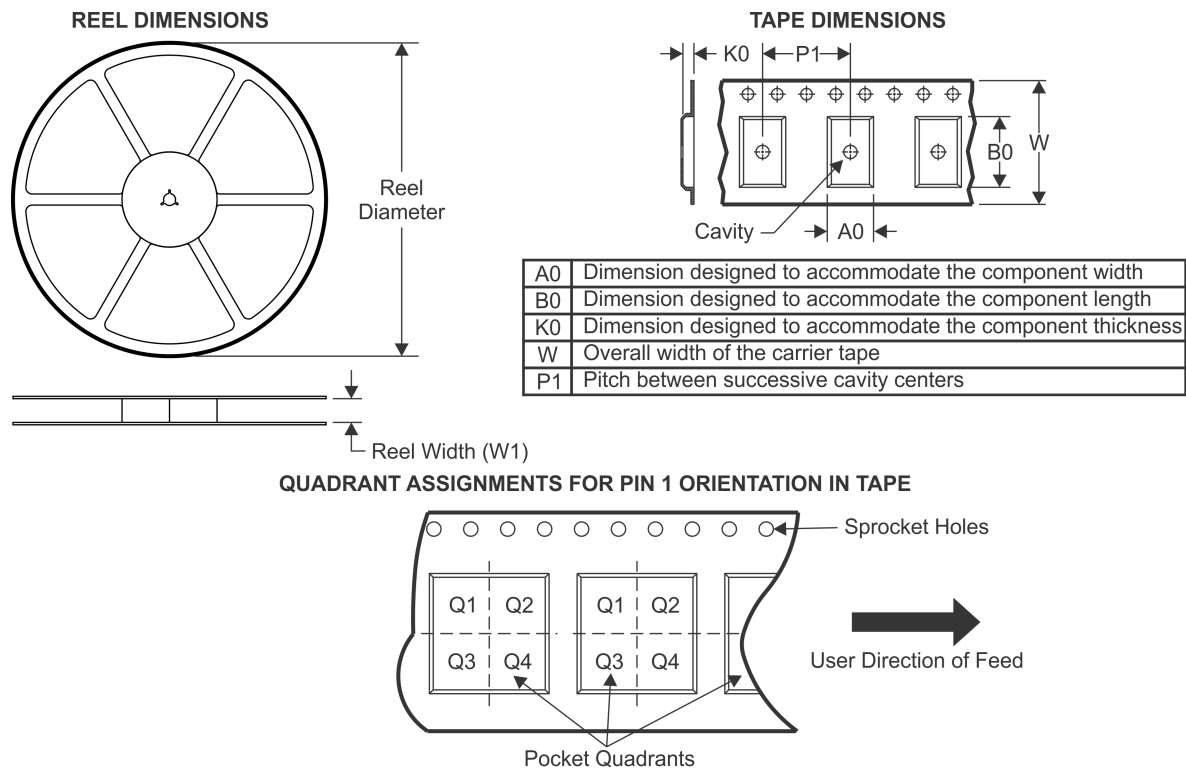TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS82740BSIPR	uSiP	SIP	9	3000	178.0	9.0	2.5	3.1	1.35	4.0	8.0	Q2

TAPE AND REEL BOX DIMENSIONS

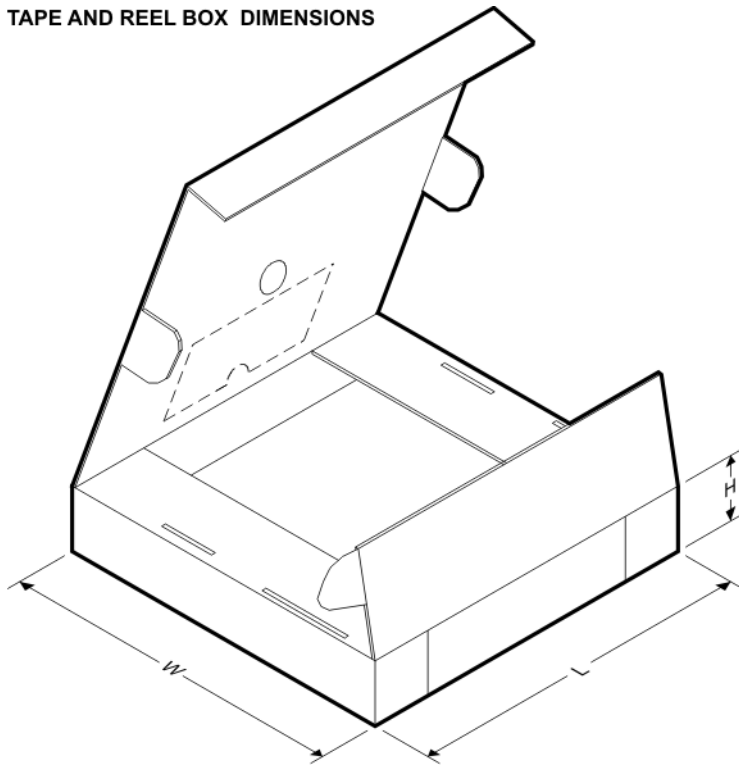

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS82740BSIPR	uSiP	SIP	9	3000	223.0	194.0	35.0

重要声明

德州仪器 (TI) 公司有权按照最新发布的 JESD46 对其半导体产品和服务进行纠正、增强、改进和其他修改，并不再按最新发布的 JESD48 提供任何产品和服务。买方在下订单前应获取最新的相关信息，并验证这些信息是否完整且是最新的。

TI 公布的半导体产品销售条款 (<http://www.ti.com/sc/docs/stdterms.htm>) 适用于 TI 已认证和批准上市的已封装集成电路产品的销售。另有其他条款可能适用于其他类型 TI 产品及服务的使用或销售。

复制 TI 数据表上 TI 信息的重要部分时，不得变更该等信息，且必须随附所有相关保证、条件、限制和通知，否则不得复制。TI 对该等复制文件不承担任何责任。第三方信息可能受到其它限制条件的制约。在转售 TI 产品或服务时，如果存在对产品或服务参数的虚假陈述，则会失去相关 TI 产品或服务的明示或暗示保证，且构成不公平的、欺诈性商业行为。TI 对此类虚假陈述不承担任何责任。

买方和在系统中整合 TI 产品的其他开发人员（总称“设计人员”）理解并同意，设计人员在设计应用时应自行实施独立的分析、评价和判断，且应全权负责并确保应用的安全性，及设计人员的应用（包括应用中使用的 TI 产品）应符合所有适用的法律法规及其他相关要求。设计人员就自己设计的应用声明，其具备制订和实施下列保障措施所需的一切必要专业知识，能够 (1) 预见故障的危险后果，(2) 监视故障及其后果，以及 (3) 降低可能导致危险的故障几率并采取适当措施。设计人员同意，在使用或分发包含 TI 产品的任何应用前，将彻底测试该等应用和该等应用中所用 TI 产品的功能。

TI 提供技术、应用或其他设计建议、质量特点、可靠性数据或其他服务或信息，包括但不限于与评估模块有关的参考设计和材料（总称“TI 资源”），旨在帮助设计人员开发整合了 TI 产品的应用，如果设计人员（个人，或如果是代表公司，则为设计人员的公司）以任何方式下载、访问或使用任何特定的 TI 资源，即表示其同意仅为该等目标，按照本通知的条款使用任何特定 TI 资源。

TI 所提供的 TI 资源，并未扩大或以其他方式修改 TI 对 TI 产品的公开适用的质保及质保免责声明；也未导致 TI 承担任何额外的义务或责任。TI 有权对其 TI 资源进行纠正、增强、改进和其他修改。除特定 TI 资源的公开文档中明确列出的测试外，TI 未进行任何其他测试。

设计人员只有在开发包含该等 TI 资源所列 TI 产品的应用时，才被授权使用、复制和修改任何相关 TI 资源。但并未依据禁止反言原则或其他法律授予您任何 TI 知识产权的任何其他明示或默示的许可，也未授予您 TI 或第三方的任何技术或知识产权的许可，该等许可包括但不限于任何专利权、版权、屏蔽作品权或与其他 TI 产品或服务的任何整合、机器制作、流程相关的其他知识产权。涉及或参考了第三方产品或服务的信息不构成使用此类产品或服务的许可或与其相关的保证或认可。使用 TI 资源可能需要您向第三方获得对该等第三方专利或其他知识产权的许可。

TI 资源系“按原样”提供。TI 兹免除对资源及其使用作出所有其他明确或默示的保证或陈述，包括但不限于对准确性或完整性、产权保证、无屡发故障保证，以及适销性、适合特定用途和不侵犯任何第三方知识产权的任何默认保证。TI 不负任何责任，包括但不限于因组合产品所致或与之有关的申索，也不为或对设计人员进行辩护或赔偿，即使该等产品组合已列于 TI 资源或其他地方。对因 TI 资源或其使用引起或与之有关的任何实际的、直接的、特殊的、附带的、间接的、惩罚性的、偶发的、从属或惩戒性损害赔偿，不管 TI 是否获悉可能会产生上述损害赔偿，TI 概不负责。

除 TI 已明确指出特定产品已达到特定行业标准（例如 ISO/TS 16949 和 ISO 26262）的要求外，TI 不对未达到任何该等行业标准要求而承担任何责任。

如果 TI 明确宣称产品有助于功能安全或符合行业功能安全标准，则该等产品旨在帮助客户设计和创作自己的符合相关功能安全标准和要求的的应用。在应用内使用产品的行为本身不会配有安全特性。设计人员必须确保遵守适用于其应用的相关安全要求和标准。设计人员不可将任何 TI 产品用于关乎性命的医疗设备，除非已由各方获得授权的管理人员签署专门的合同对此类应用专门作出规定。关乎性命的医疗设备是指出现故障会导致严重身体伤害或死亡的医疗设备（例如生命保障设备、心脏起搏器、心脏除颤器、人工心脏泵、神经刺激器以及植入设备）。此类设备包括但不限于，美国食品药品监督管理局认定为 III 类设备的设备，以及在美国以外的其他国家或地区认定为同等类别设备的所有医疗设备。

TI 可能明确指定某些产品具备某些特定资格（例如 Q100、军用级或增强型产品）。设计人员同意，其具备一切必要专业知识，可以为自己的应用选择适合的产品，并且正确选择产品的风险由设计人员承担。设计人员单方面负责遵守与该等选择有关的所有法律或监管要求。

设计人员同意向 TI 及其代表全额赔偿因其不遵守本通知条款和条件而引起的任何损害、费用、损失和/或责任。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2017 德州仪器半导体技术（上海）有限公司