

FEATURES

Amplifies, Protects, Filters, and Isolates a wide variety of three-wire potentiometers and two-wire rheostats (slidewires).

Generates a low-impedance output of 0 to +5V.

Module circuitry can withstand 240v rms at the input screw-terminals.

All 5B36 series modules are mix-and-match and Hot Swappable.

APPLICATIONS

Industrial signal conditioning

Industrial signal isolation

Industrial signal filtering

PRODUCT OVERVIEW

The 5B Series represents an innovative generation of low cost, high performance plug-in signal conditioners. Designed for industrial applications, these modules incorporate highly reliable transformer-based isolation and automated surface-mount manufacturing technology. They are compact, economical components whose performance exceeds that available from more expensive devices. Combining 1500 V rms continuous isolation, +0.05% calibrated accuracy, small size and low cost, the 5B Series is an attractive alternative to expensive signal conditioners and in-house designs

All modules are potted and identical in pin-out and size (2.27" x 2.32" x 0.595"). They can be mixed and matched, permitting users to address their exact needs, and may be "hot swapped" without disturbing field wiring or power. The isolated input modules provide 0 to +5V or +5V outputs and accept J, K, T, E, R, S, N, or B type thermocouples.

These modules feature complete signal conditioning functions including 240 V rms input protection, filtering, chopper stabilized low drift +1 uV/oC amplification, 1500 V rms isolation, and sensor excitation when required.

All modules feature excellent common mode rejection and meet industrial transient surge withstand specifications.

Rev. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective companies.

FUNCTIONAL BLOCK DIAGRAM

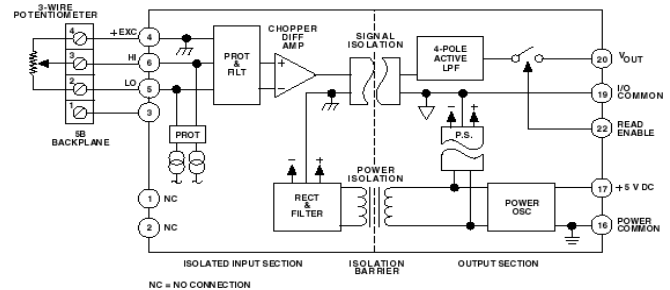


Figure 1. 5B36 Functional Block Diagram

There are also a number of backplanes and mounting sockets which provide a complete signal conditioning solution for end users. Each backplane incorporates screw terminals for field wiring inputs and outputs and cold junction sensors for thermocouple applications.

These signal conditioners are designed to provide an easy and convenient solution to signal conditioning problems of both designers and end users in measurement and control applications. Typical uses include microcomputer-based measurement systems, standard data acquisition systems, programmable controllers, analog recorders and dedicated control systems. The 5 B series modules are ideally suited to applications where monitoring and control of temperature, pressure, flow, rotation and other analog signals are required.

The 5B Series modules and backplanes are approved by Factory Mutual (FM) and the 5B Series modules are approved by the Canadian Standards Association (CSA) for use in Class 1, Division 2, Groups A, B, C, and D locations. These approvals certify that the 5B Series is suitable for use in locations where a hazardous concentration of flammable gas may exist only under fault conditions of operation. Equipment of this category is called "nonincendive" and they need no special enclosures or other physical safeguards.

The 5B series modules and backplanes have been tested and passed the stringent heavy industrial requirements of the European Union's electromagnetic compatibility (EMC) directive – EN50082-1 and EN50081-2. When used according to installation directions (refer to 5B series User Manual), any errors caused by EMI/RFI interference will be less than 0.1% of the full scale 5B measurement range for field strengths up to 10 V/M and frequencies up to 1 GHz.

5B36* PRODUCT PAGE QUICK LINKS

Last Content Update: 02/23/2017

COMPARABLE PARTS

View a parametric search of comparable parts.

DOCUMENTATION

Application Notes

- AN-528: Design Considerations for Designing a 5B Series System
- AN-529: 5B Series Signal Conditioning Subsystems in RFI/EMI Fields
- AN-530: Narrow or Wide Bandwidth 5B Series Input Modules: Which is the Right Choice?
- AN-533: Applying 5B Series Backplanes and Mounting Cards
- AN-535: Digital Input/Output Subsystems

Data Sheet

- 5B36: Isolated, Potentiometer Input Data Sheet

User Guides

- 5B Series Manual

TOOLS AND SIMULATIONS

- 5B I/O Subsystem Software Tools

REFERENCE MATERIALS

Informational

- IOS Products Warranty
- Selecting the Right Signal Conditioning Series for Your Application

DESIGN RESOURCES

- 5B36 Material Declaration
- PCN-PDN Information
- Quality And Reliability
- Symbols and Footprints

DISCUSSIONS

View all 5B36 EngineerZone Discussions.

SAMPLE AND BUY

Visit the product page to see pricing options.

TECHNICAL SUPPORT

Submit a technical question or find your regional support number.

DOCUMENT FEEDBACK

Submit feedback for this data sheet.

GENERAL DESCRIPTION

The 5B36 is a single-channel signal conditioning module that amplifies, isolates, filters, buffers a wide variety of three-wire potentiometers and two-wire rheostats (slidewires). The module provides an accurately scaled, low-noise low-impedance output of 0 to +5V.

Accurate and Stable Performance – The 5B36 supplies protected potentiometer / slidewire excitation from a pair of closely matched precision current sources designed to cancel errors due to lead resistances. A low-drift chopper-stabilized differential amplifier allows use of a very low excitation current to minimize error due to potentiometer self-heating. The amplifiers low input offset drift ($\pm 0.004 \Omega / ^\circ\text{C}$) and gain drift of 30 ppm/ $^\circ\text{C}$ assure accuracy over the full operating temperature range.

True Three-Port Isolation – The floating, differential input circuit on the field side eliminates the need for any input grounding. Signal and power isolation by transformer coupling uses a proprietary modulation technique for linear, stable and reliable performance. A demodulator on the computer side of the signal transformer recovers the original signal, which is then filtered and buffered to provide a low-noise, low-impedance output signal. True three-port isolation (Input-Output-Power) includes common-mode rating of : 1500V rms between input-

output and input-power; 250V rms between power and output – no return path is required between the power and signal output commons.

Filtering and Protection – An optimized five-pole Butterworth filter (with a 4-Hz bandwidth) provides 116 dB of normal-mode rejection (noise on signal) at 60 Hz and 108 dB at 50. Output noise is an exceptionally low 0.3 mV pk-pk in a 100 kHz bandwidth and 6 mV pk-pk in a 5 MHz bandwidth.

The 5B36 protects the computer side from damage due to field-side over-voltage faults. The module withstands 240V rms at the input terminals without damage, thereby shielding the internal computer-side circuitry from field-side over-voltage conditions. In addition, the 5B36 is mix-and-match and hot swappable with all other 5B Series modules, so can be inserted or removed from any socket in the same backplane without disrupting system power.

A series output switch eliminates the need for external multiplexing in many applications. The switch is turned on by an active-low enable input. If the switch is to be on at all times, the enable-input should be grounded to power common as it is on the 5B01 and 5B08 backplanes..



Figure 2

5B36 Models Available

Model	Input Range	Output Range
5B36-01	0 Ω to 100 Ω	0 V to +5 V
5B36-02	0 Ω to 500 Ω	0 V to +5 V
5B36-03	0 Ω to 1 k Ω	0 V to +5 V
5B36-04	0 Ω to 10 k Ω	0 V to +5 V
5B36-Custom	*	*

* Custom Input/Output ranges are available. Refer to configuration guide.

5B36 Specifications

(typical @ +25°C and $V_s = +5$ V dc)

Description	Model 5B36
Input Ranges	
Standard Ranges	0 Ω to 10 k Ω (Refer to Model Table)
Custom Ranges	0 Ω to 10 k Ω (Refer to Ordering Section)
Output Range ($R_L > 50$ k Ω)	0 V to +5 V
Accuracy ¹	
Initial @ +25°C	$\pm 0.08\%$ Span
Input Offset vs. Temperature	
100 Ω , 500 Ω , 1 k Ω Sensors	± 0.004 Ω /°C
10 k Ω Sensor	± 0.01 Ω /°C
Output Offset vs. Temperature	± 20 μ V/°C
Gain vs. Temperature	$\pm 0.003\%$ of Reading/°C
Input Resistance	
Power On	> 1000 M Ω
Power Off	200 k Ω
Overload	200 k Ω
Noise	
Input, 0.1 Hz to 10 Hz Bandwidth	0.2 μ V rms
Output, 100 kHz Bandwidth	100 μ V rms (0.3 mV peak-peak)
Output, 1 MHz Bandwidth	1.5 mV peak-peak
Output, 5 MHz Bandwidth	6 mV peak-peak
Bandwidth, -3 dB	4 Hz
Output Rise Time, 10% to 90% Span	100 ms
Common-Mode Voltage (CMV)	
Input-to-Output, Continuous	1500 V rms, maximum

Input-to-Power, Continuous	1500 V rms, maximum
Output-to-Power, Continuous ²	250 V rms, maximum
Transient	ANSI/IEEE C37.90.1-1989
Common Mode Rejection (CMR)	
1 k Ω Source Imbalance, 50/60 Hz	170 dB
Normal Mode Rejection (NMR)	116 dB @ 60 Hz; 108 dB @ 50 Hz
Sensor Excitation Current	
100 Ω , 500 Ω , 1 k Ω Sensors	0.25 mA
10 k Ω Sensor	0.1 mA
Lead Resistance Effect	
100 Ω , 500 Ω , 1 k Ω Sensors	$\pm 0.005 \Omega / \Omega$
10 k Ω Sensor	$\pm 0.01 \Omega / \Omega$
Input Protection	
Continuous	240 V rms, maximum
Transient	ANSI/IEEE C37.90.1-1989
Output Resistance	25 Ω
Voltage Output Protection	Continuous Short to Ground
Output Current Limit	± 9 mA
Output Selection Time	6 μ s to ± 1 mV of V_{out} @ $C_{load} = 0$ to 2,000 pF
Output Enable Control²	
Max Logic "0"	+0.8 V
Min Logic "1"	+2.4 V
Max Logic "1"	+100 V
Input Current "0", "1"	0.5 μ A
Power Supply Voltage	+5 V dc $\pm 5\%$
Power Supply Current	15 mA
Power Supply Sensitivity, RTI	$\pm 2 \mu$ V/% of V_s
Mechanical Dimensions	2.275" x 2.375" x 0.595" (57.8 mm x 59.1 mm x 15.1 mm)
Environmental	
Temperature Range	
Rated Performance	-40°C to +85°C
Operating	-40°C to +85°C
Storage	-40°C to +85°C
Relative Humidity	0 to 93% @ +40°C non-condensing
RFI Susceptibility	$\pm 0.5\%$ Span error @ 400 MHz, 5 Watt, 3 ft

* $\pm 0.025 \Omega$ For Cu RTD's; $\pm 0.1 \Omega$ For Ni RTD's.

¹Includes the combined effects of repeatability, hysteresis, and nonlinearity error. Loads heavier than 50 k Ω will degrade nonlinearity and gain temperature coefficient.

²The user's board layout must separate Power Common from Output Common. When the output switch is not used, connect the Enable Input to the Output Common. Output Common is connected to power common when the 5B36 is installed on a 5B Series backplane.

Specifications subject to change without notice.

PIN CONFIGURATIONS AND FUNCTIONAL DESCRIPTIONS

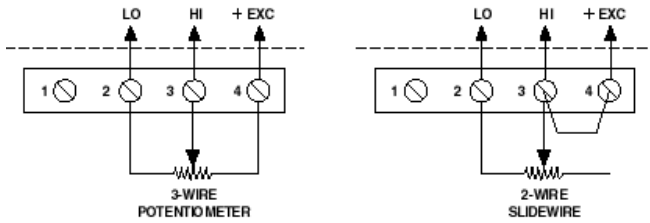


Figure 3 5B36 Input Field Connections

Table 1. Pin Function Descriptions—

Pin No.	Description
1	n/c
2	LO
3	HIGH
4	EXC +


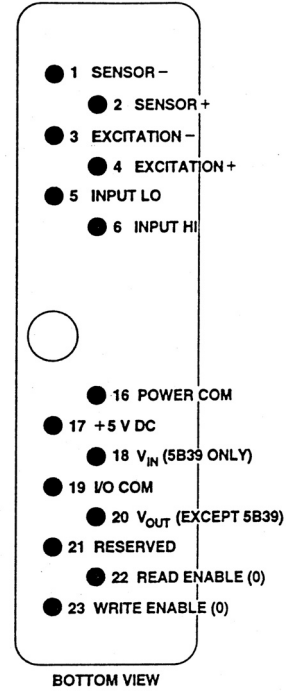


Figure 4 . Model 5B Series Module, with pin-out assignments.

ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.

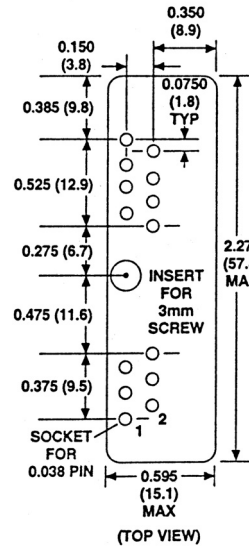

OUTLINE DIMENSIONS

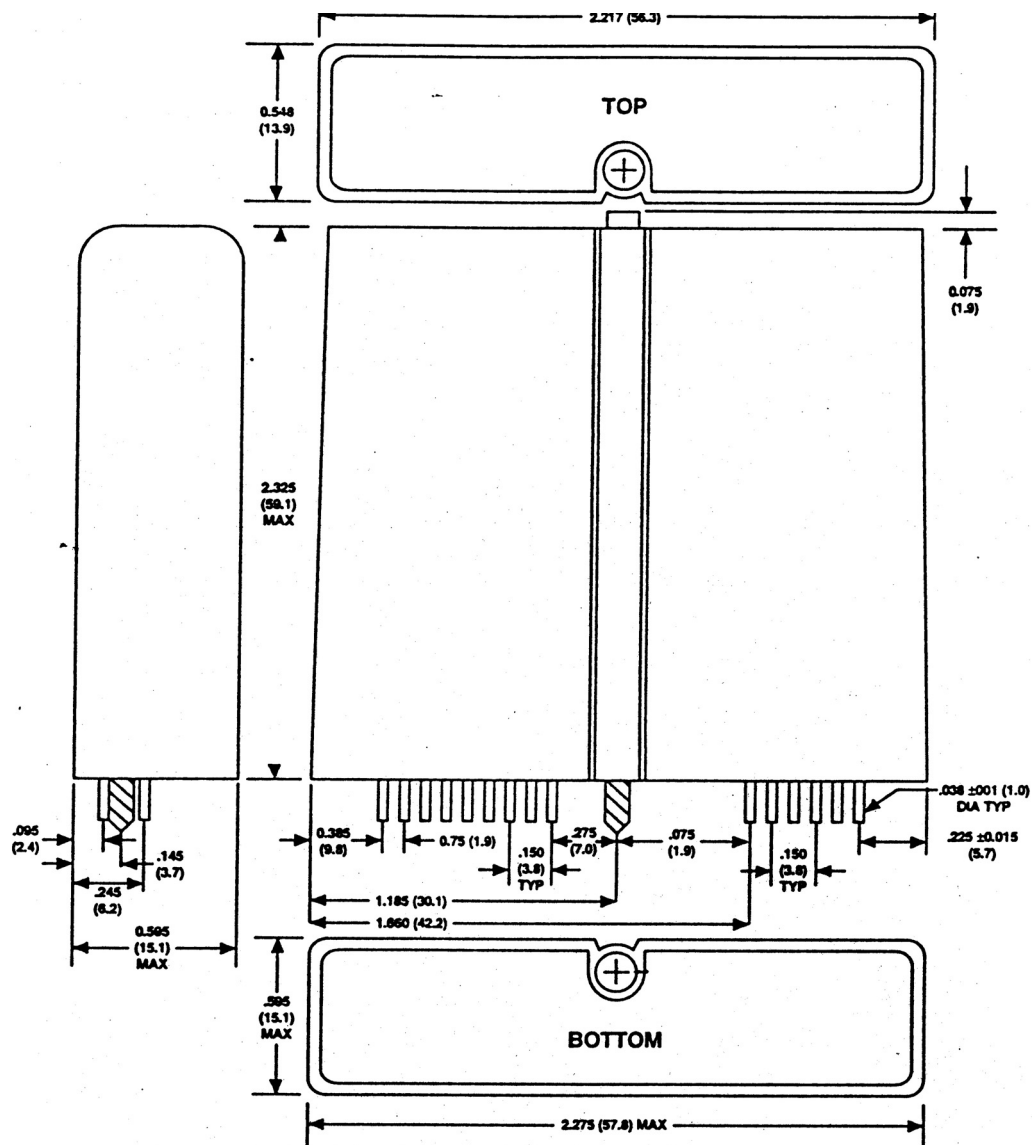


Figure 5. Outline Dimensions

NOTES

NOTES