

## Integrated Analog Front-End for Heart Rate Monitors and Low-Cost Pulse Oximeters

### Features


- **Fully-Integrated Analog Front-End for Pulse Oximeter Applications**
- **Receiver:**  
High Accuracy Current to Frequency Converter up to 500KHz
- **Transmitter:**  
Flexible Pulse Sequencing and Timing Control with Integrated LED Driver (H-Bridge)  
95dB Dynamic Range  
LED Currents Programmable with an External Resistor and Analog Input Voltages
- **Power Supplies: 2.5V to 5.5V**  
Low Power: 1.25 mA at 3.3V Supply
- **Specified Temperature Range: -40°C to +85°C**
- **Package: TSSOP14, QFN16**

### Applications

- Low-Cost Medical Pulse Oximeter Applications
- Optical HRM

### Product Description

The TS9514 is a fully-integrated analog front-end (AFE) that is ideally suited for pulse Oximeter applications. The device consists of a low-noise I/F converter and a LED transmitter section. The I/F converter converts photodiode current to frequency signal. The LED transmitter currents can be easily controlled through analog input voltages. The TS9514's flexibility allows users to have complete control of the device's timing characteristics. The TS9514 is an AFE solution in TSSOP14 and QFN16 packages and is specified over the operating temperature from -40°C to +85°C.

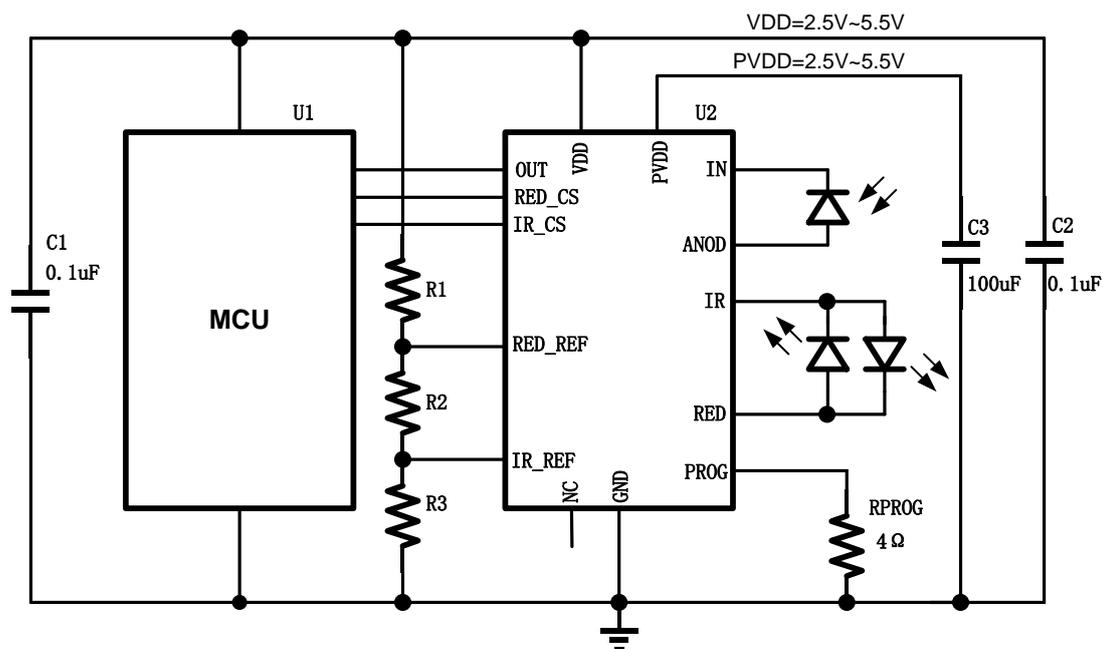

## Ordering Information

| Product   | Package-Lead | Package Option | Package Qty. | Operating Temperature Range |
|-----------|--------------|----------------|--------------|-----------------------------|
| TS9514EQR | QFN16        | Tape and Reel  | 2500         | -40°C to +85°C              |
| TS9514ETR | TSSOP14      | Tape and Reel  | 2500         | -40°C to +85°C              |

## Absolute Maximum Ratings

Over operating free-air temperature range, unless otherwise noted.



|  |                          | Value       | Unit |
|--|--------------------------|-------------|------|
| VDD to GND                                   |                          | 2.5 to 5.5  | V    |
| Input current to any pin except supply pins  |                          | ±10         | mA   |
| Input current                                | Momentary                | ±50         | mA   |
|  | Continuous               | ±10         | mA   |
| Operating temperature range                  |                          | -40 to +85  | °C   |
| Storage temperature range                    |                          | -65 to +150 | °C   |
| Maximum junction temperature, T <sub>J</sub> |                          | +125        | °C   |
| Electrostatic discharge (ESD) ratings        | Human body model (HBM)   | ±2000       | V    |
|  | Machine model (MM)       | ±200        | V    |
|  | Charge device model(CDM) | ±500        | V    |

## ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjects to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN Configuration

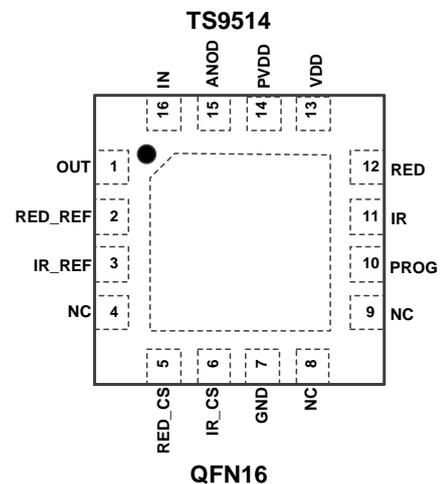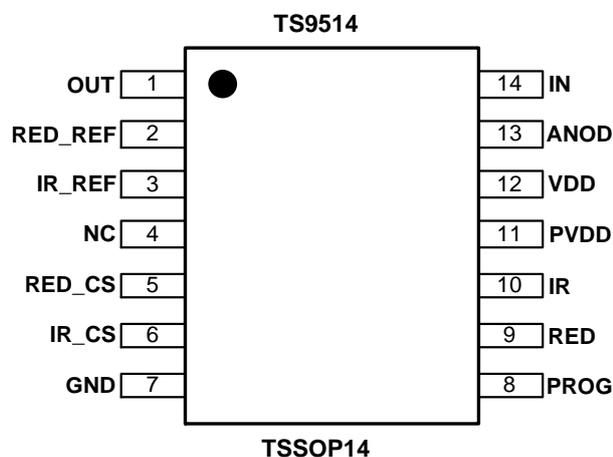

**Table 1. PIN Descriptions**

| NO.<br>(TSSOP14) | NO.<br>(QFN16) | Name    | Function | Description  |
|------------------|----------------|---------|----------|--|
| 1                | 1              | OUT     | Output   | Frequency output   |
| 2                | 2              | RED_REF | Input    | RED LED driver reference voltage input                         |
| 3                | 3              | IR_REF  | Input    | IR LED driver reference voltage input                          |
| 4                | 4,8,9          | NC      | Input    | No connection pin  |
| 5                | 5              | RED_CS  | Input    | RED LED control input. High active                             |
| 6                | 6              | IR_CS   | Input    | IR LED Control Input. High active                              |
| 7                | 7              | GND     | Supply   | Supply ground pin  |
| 8                | 10             | PROG    | I/O      | LED driver current program pin, connect a resistor to this Pin |
| 9                | 12             | RED     | Output   | RED LED drive output   |
| 10               | 11             | IR      | Output   | IR LED drive output  |
| 11               | 14             | PVDD    | Supply   | LED driver power supply pin                                    |
| 12               | 13             | VDD     | Supply   | Power supply pin   |
| 13               | 15             | ANOD    | Input    | Current input, connect to PIN diode anode                      |
| 14               | 16             | IN      | Input    | Current input, connect to PIN diode cathode                    |

## Electrical Characteristics

Minimum and maximum specification are at  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ . Typical specifications are at  $+25^\circ\text{C}$ .

All specifications are at  $V_{DD} = 3.3\text{V}$ , unless otherwise noticed.

| Parameter                              | Test Conditions  | Min   | Typ | Max          | Unit               |    |
|--|--|---|-----|--------------|--------------------|----|
| <b>Performance (Full-Signal Chain)</b> |  |   |     |              |                    |    |
| $V_{DD}$                               | Receiver supply voltage                                      | $0^\circ\text{C}$ to $+85^\circ\text{C}$  | 2.5 | 5.5          | V                  |    |
|  |  | $-40^\circ\text{C}$ to $+85^\circ\text{C}$  | 2.7 | 5.5          | V                  |    |
| $PV_{DD}$                              | LED driver supply voltage <sup>1</sup>                       | 2.5   | 5.5 | V            | V                  |    |
| $I_{DD}$                               | Supply current   | $T_A = 25^\circ\text{C}$ , $V_{DD} = 5.5\text{V}$   |     | 1.25         | 1.7                | mA |
| PRF                                    | Pulse repetition frequency                                   |   |     | 1000         | SPS                |    |
| <b>I-F Transimpedance Amplifier</b>    |  |   |     |              |                    |    |
| $f_o$                                  | Output frequency   | $I_{IN} = 1\mu\text{A}$   |     | 100          | kHz                |    |
|  | Full-scale frequency   |   | 500 | 1000         | kHz                |    |
|  | Nonlinearity   | $f_o = 0$ to $100\text{kHz}$  |     | $\pm 1\%$    | %FS                |    |
| $R_e$                                  | Current responsivity   |   | 100 |              | kHz/ $\mu\text{A}$ |    |
| PSRR                                   | Power-supply rejection ratio                                 | $f_o = 100\text{kHz}$   |     | 0.3          | %/V                |    |
| <b>Transmitter</b>                     |  |   |     |              |                    |    |
|  | Full-scale output current <sup>1</sup>                       | $T_A = 25^\circ\text{C}$ , $V_{DD} = 5\text{V}$ , $R_{PROG} = 4\Omega$ ;<br>$V_{CONTROL} = 0.8\text{V}$ |     | 200          | mA                 |    |
| $V_{CONTROL}$                          | Analog input voltage   |   | 0   | $V_{DD} - 2$ | V                  |    |
|  | Output current offset  | $V_{DD} = 5\text{V}$ , $R_{PROG} = 4\Omega$   |     | 0.25         | 1.25               | mA |
|  | Transmitter noise dynamic range, over 0.1Hz to 5Hz bandwidth | At 5mA output current   |     | TBD          | dB                 |    |
|  |  | At 25mA output current  |     | TBD          | dB                 |    |
|  |  | At 50mA output current  |     | TBD          | dB                 |    |
|  | Minimum on time of LEDs                                      |   | 50  |              | $\mu\text{s}$      |    |
|  | LED current linearity vs analog input voltage                | Percent of full-scale current   |     | 1%           |                    |    |
|  | Output current settling time                                 | From 0 to 50 mA   |     | TBD          | $\mu\text{s}$      |    |
|  |  | From 50 mA to 0   |     | TBD          | $\mu\text{s}$      |    |
| <b>Temperature</b>                     |  |   |     |              |                    |    |
|  | Specified temperature range                                  |   | -40 | +85          | $^\circ\text{C}$   |    |
|  | Storage temperature range                                    |   | -65 | +150         | $^\circ\text{C}$   |    |

1. The Maximum LED output current depends on  $PV_{DD}$ ,  $R_{PROG}$  resistance and LED forward voltage strongly; it can be smaller than the full-scale current.

**Overview**

The TS9514 is a complete analog front-end (AFE) circuit targeting pulse oximeter applications. The device consists of a low-noise I/F converter and a LED transmitter section. The I/F converter converts the photodiode current to frequency signal precisely. The output of the device connects directly to a high resolution timer of the external microcontroller (MCU) for which an A/D converter is not necessary. The LED transmitter current can be adjusted through analog input voltages.

**Receiver**

The receiver consists of a high precision current-to-frequency (I/F) converter section. The I/F converter converts the photodiode current to frequency signal with high dynamic range and linearity. The converter continuously converts input current to frequency without being interrupted by the LED control signals.

**Transmitter Section**

The transmitter section integrates a voltage controlled constant current source, an H-bridge LED driver and its control logic. Two LED driver schemes are supported: an H-bridge drive for a two-terminal back-to-back LED package and a push-pull drive for a three-terminal LED package. The on-off of the LED current is controlled by logic signals at the input pins of RED\_CS and IR\_CS, and each LED current can be adjusted by the corresponding analog input voltage independently. An external resistor  $R_{PROG}$  at the PROG pin sets the ratio of the input voltage to the LED current and the maximum output current is primarily dependent on  $R_{PROG}$ , the power supply voltage  $PV_{DD}$ , and the forward voltage of the LEDs.

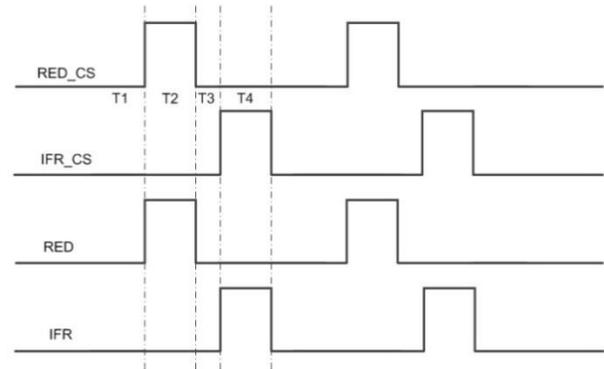


Figure 1. Timing of LED Control.

**LED Current Control**

The output currents of the transmitter are controlled by the analog input voltages and are given by the following equation:

$$I_{LED} = \frac{V_{REF}}{R_{PROG}}$$

where  $V_{REF}$  is the voltage at RED\_REF or IR\_REF pin. The voltages at RED\_REF pin and IR\_REF pin control the RED LED current and IR LED current respectively and independently.

**Timing Diagram of the Transmitter**

Figure 1 shows the timing diagram for the LED transmitter control. Through the internal logic, signals at the RED\_CS and IR\_CS pins control the switches of the H-Bridge. In T1 and T3 cycles, both LEDs are turned off. In T2 and T4 cycles, RED LED and IR LED are turned on respectively. Both of the RED\_CS and IR\_CS pins are active 'high', however, when both are high at the same time, there will be no current flow through the two-terminal back-to-back packaged LEDs (see Table 2 and Table 3).

**Table 2. Transmitter True Table ( two-terminal back-to-back packaged LEDs)**

| Inputs |       | Outputs |    |              |             |
|--------|-------|---------|----|--------------|-------------|
| RED_CS | IR_CS | RED     | IR | RED Transmit | IR Transmit |
| 0      | 0     | Z       | Z  | OFF          | OFF         |
| 1      | 0     | H       | L  | ON           | OFF         |
| 0      | 1     | L       | H  | OFF          | ON          |
| 1      | 1     | H       | H  | OFF          | OFF         |


**Table 3. Timing Requirements**

| Parameter     |  | Min | Typ | Max | Unit    |
|---------------|--|-----|-----|-----|---------|
| $t_{RED\_CS}$ | Red LED on time, active high                       | 50  |     |     | $\mu s$ |
| $t_{IR\_CS}$  | Infrared LED on time, active high                  | 50  |     |     | $\mu s$ |
| $t_{INT}$     | The time interval between Red LED on and IR LED on | 50  |     |     | $\mu s$ |



**Mechanical Dimensions**


**TSSOP-14 PACKAGE MECHANICAL DRAWING**

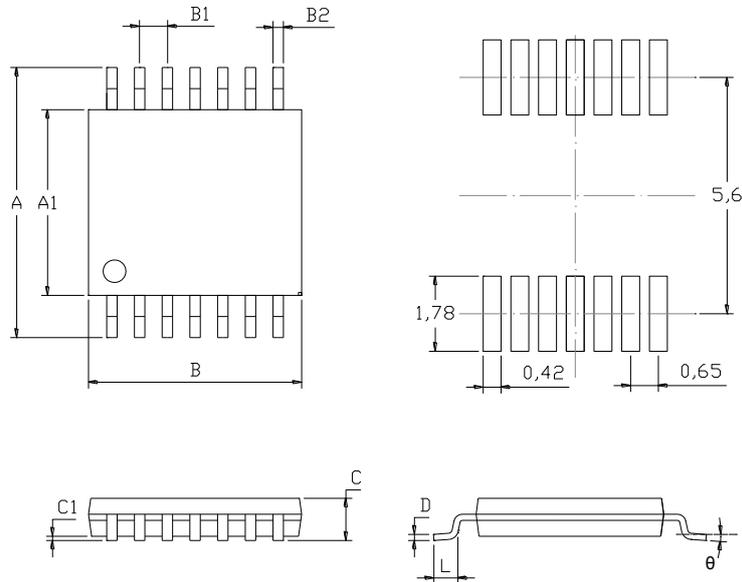


**TSSOP-14 PACKAGE MECHANICAL DATA**

| symbol | dimensions  |      |           |        |
|--------|-------------|------|-----------|--------|
|        | millimeters |      | inches    |        |
|        | min         | max  | min       | max    |
| A      | 6.2         | 6.6  | 0.2441    | 0.2598 |
| A1     | 4.3         | 4.5  | 0.1693    | 0.1772 |
| B      | 4.9         | 5.1  | 0.1929    | 0.2008 |
| B1     | 0.65        |      | 0.0256    |        |
| B2     | 0.19        | 0.3  | 0.0075    | 0.0118 |
| C      | 1.20MAX     |      | 0.0472MAX |        |
| C1     | 0.05        | 0.15 | 0.0020    | 0.0059 |
| L      | 0.5         | 0.75 | 0.0197    | 0.0295 |
| D      | 0.1         | 0.2  | 0.0039    | 0.0079 |
| θ      | 0°          | 8°   | 0°        | 8°     |


**QFN-16 PACKAGE MECHANICAL DRAWING**

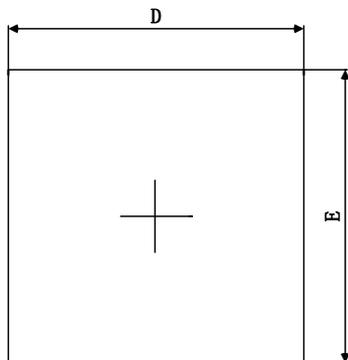

**TOP View**

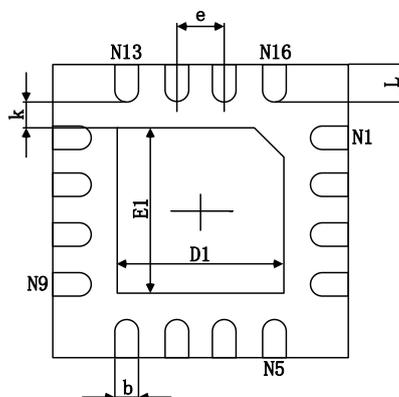

**Bottom View**

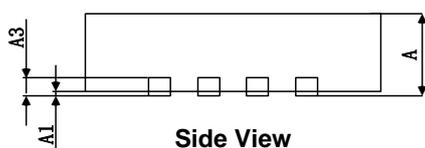

**Side View**

**QFN-16 PACKAGE MECHANICAL DATA**

| symbol | dimensions  |             |             |             |
|--------|-------------|-------------|-------------|-------------|
|        | millimeters |             | inches      |             |
|        | min         | max         | min         | max         |
| A      | 0.700/0.800 | 0.800/0.900 | 0.028/0.031 | 0.031/0.035 |
| A1     | 0.000       | 0.050       | 0.000       | 0.002       |
| A3     | 0.203REF.   |             | 0.008REF.   |             |
| D      | 2.924       | 3.076       | 0.115       | 0.121       |
| E      | 2.924       | 3.076       | 0.115       | 0.121       |
| D1     | 1.600       | 1.800       | 0.063       | 0.071       |
| E1     | 1.600       | 1.800       | 0.063       | 0.071       |
| k      | 0.200MIN.   |             | 0.008MIN    |             |
| b      | 0.180       | 0.280       | 0.007       | 0.011       |
| e      | 0.500TYP.   |             | 0.020TYP.   |             |
| L      | 0.324       | 0.476       | 0.013       | 0.019       |

## **CONTACT INFORMATION**

**Trusignal Microelectronics**

328 Xinghu Street, Suite 22-207, Suzhou Industrial Park, Suzhou, 215123, PR China

**Email:** support@trusignal.com; sales@trusignal.com

**Phone:** +86 512-65923982

**Fax:** +86 512-65923995