

FEATURES

APIX² transmitter with HDCP

- High-bandwidth Digital Content Protection (HDCP) 1.4 support with internal preprogrammed HDCP keys
- Dual-channel encryption engine supports simple daisy-chain implementation for remote displays
- Independent encryption of video and audio
- Up to 3000 Mbps sustained downstream link bandwidth
- Up to 187.5 Mbps upstream link bandwidth
- Media independent interface (MII), serial port interface (SPI), I²C, GPI and GPO interfaces for sideband communication
- High-Definition Multimedia Interface (HDMI[®]) receiver
- Supports all HDMI video resolutions up to the maximum APIX[®] video link bandwidth of 2.57 Gbps
- All mandatory and additional 3D video formats supported
- HDCP 1.4 decryption support

Hardware controller for automated HDCP repeater functions across APIX and HDMI HDCP blocks

- HDCP repeater support, up to 24 KSVs supported
- Integrated CEC controller, CEC 1.4 compatible
- Adaptive TMDs equalizer
- 5 V detect and Hot Plug[™] assert

ITU-R BT.656 support

- 8-bit ITU-R BT.656 interface with embedded timing
- 720p supported at 148.5 MHz clock rate

Audio support

- HDMI audio extraction support
- Advanced audio muting feature
- Supports time division multiplexed (TDM) I²S audio I/O
- On-chip SRC for synchronization to external master clocks

General

- Dual interrupt controller with APIX link status reporting
- Internal EDID RAM
- Any-to-any 3 × 3 color space conversion (CSC) matrix
- 64-lead LFCSP, 9 mm × 9 mm package

Qualified for automotive applications

APPLICATIONS

- Automotive infotainment
- Infotainment head units
- Rear seat entertainment systems
- Automotive media port applications
- HDMI repeaters and video switches

For more information about the ADV7680, including the complete data sheet, contact your local Analog Devices, Inc., sales office at www.analog.com/sales.

Advantiv
Advanced Television Solutions
by Analog Devices

Rev. SpB

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

SIMPLIFIED FUNCTIONAL BLOCK DIAGRAM

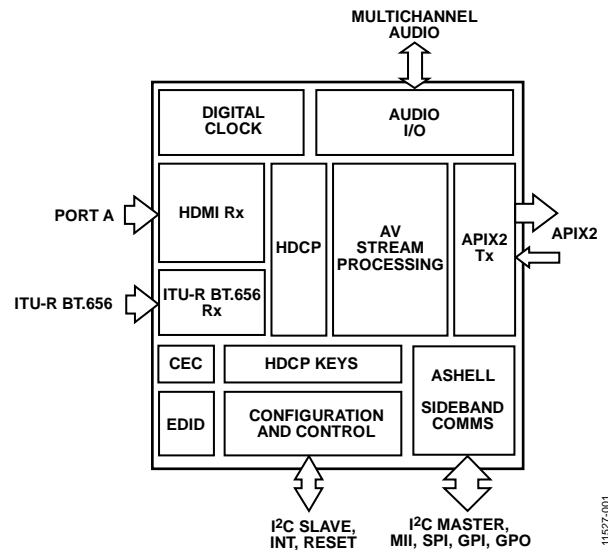


Figure 1.

11527-001

ADV7680* PRODUCT PAGE QUICK LINKS

Last Content Update: 02/23/2017

COMPARABLE PARTS

View a parametric search of comparable parts.

DOCUMENTATION

Data Sheet

- ADV7680: APIX2 Transmitter with HDMI and HDCP Support Data Sheet

DESIGN RESOURCES

- ADV7680 Material Declaration
- PCN-PDN Information
- Quality And Reliability
- Symbols and Footprints

DISCUSSIONS

View all ADV7680 EngineerZone Discussions.

SAMPLE AND BUY

Visit the product page to see pricing options.

TECHNICAL SUPPORT

Submit a technical question or find your regional support number.

DOCUMENT FEEDBACK

Submit feedback for this data sheet.

NOTES

APIX® is a registered mark of INOVA Semiconductors GmbH.

I²C refers to a communications protocol originally developed by Philips Semiconductors (now NXP Semiconductors).