



SGM8634

470 μ A, 6MHz, Rail-to-Rail I/O CMOS Operational Amplifier

GENERAL DESCRIPTION

The quad SGM8634 is a low noise, low voltage and low power operational amplifier that can be designed into a wide range of applications. The SGM8634 has a high gain-bandwidth product of 6MHz, a slew rate of 3.7V/ μ s and a quiescent current of 470 μ A/amplifier at 5V.

The SGM8634 is designed to provide optimal performance in low voltage and low noise systems. It provides rail-to-rail output swing into heavy loads. The input common mode voltage range includes ground, and the maximum input offset voltage is 3.5mV. The operating range is from 2.5V to 5.5V.

The quad SGM8634 is available in Green TSSOP-14 and SOIC-14 packages. It is specified over the extended -40°C to +125°C industrial temperature range.

FEATURES

- Rail-to-Rail Input and Output
- Input Offset Voltage: 3.5mV (MAX)
- High Gain-Bandwidth Product: 6MHz
- High Slew Rate: 3.7V/ μ s
- Settling Time to 0.1% with 2V Step: 2.1 μ s
- Overload Recovery Time: 0.9 μ s
- Low Noise: 12nV/ $\sqrt{\text{Hz}}$
- Supply Voltage Range: 2.5V to 5.5V
- Input Voltage Range: -0.1V to 5.6V with $V_S = 5.5V$
- Low Supply Current: 470 μ A/Amplifier (TYP)
- -40°C to +125°C Operating Temperature Range
- Available in Green TSSOP-14 and SOIC-14 Packages

APPLICATIONS

Sensors
Audio
Active Filters
A/D Converters
Communications
Test Equipment
Cellular and Cordless Phones
Laptops and PDAs
Photodiode Amplification
Battery-Powered Instrumentation

PACKAGE/ORDERING INFORMATION


| MODEL | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER | PACKAGE MARKING | PACKING OPTION |
|---------|---------------------|-----------------------------|-----------------|---------------------------|---------------------|
| SGM8634 | TSSOP-14 | -40°C to +125°C | SGM8634XTS14/TR | SGM8634 XTS14 XXXXX | Tape and Reel, 3000 |
| | SOIC-14 | -40°C to +125°C | SGM8634XS14/TR | SGM8634XS14 XXXXX | Tape and Reel, 2500 |

MARKING INFORMATION

NOTE: XXXXX = Date Code and Vendor Code.

TSSOP-14/SOIC-14

XXXXX



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.


ABSOLUTE MAXIMUM RATINGS

- Supply Voltage, +Vs to -Vs6V
- Input Common Mode Voltage Range
..... (-Vs) - 0.3V to (+Vs) + 0.3V
- Junction Temperature.....+150°C
- Storage Temperature Range-65°C to +150°C
- Lead Temperature (Soldering, 10s).....+260°C
- ESD Susceptibility
- HBM..... 1500V
- MM.....400V

RECOMMENDED OPERATING CONDITIONS

- Operating Temperature Range-40°C to +125°C

PIN CONFIGURATIONS

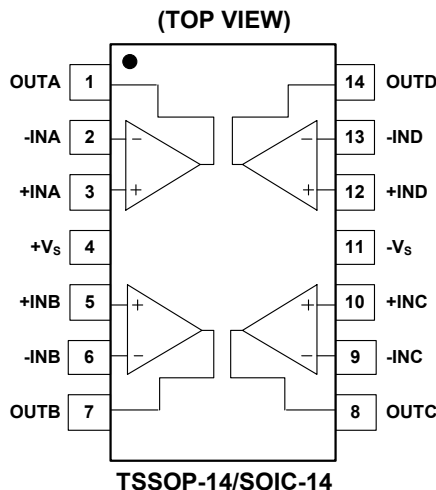

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.







ELECTRICAL CHARACTERISTICS

(At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.)

| PARAMETER | CONDITIONS | SGM8634 | | | | | | | |
|---|---|----------------|--------------------------|-----------------|-------------------|--------------------|------------------------------|-------|-------------|
| | | TYP | MIN/MAX OVER TEMPERATURE | | | | | UNITS | MIN/ MAX |
| | | +25°C | +25°C | 0°C to +70°C | -40°C to +85°C | -40°C to +125°C | | | |
| Input Characteristics | | | | | | | | | |
| Input Offset Voltage (V_{OS}) | | 0.8 | 3.5 | 3.9 | 4.3 | 4.6 | mV | MAX | |
| Input Bias Current (I_B) | | 1 | | | | | pA | TYP | |
| Input Offset Current (I_{OS}) | | 1 | | | | | pA | TYP | |
| Input Common Mode Voltage Range (V_{CM}) | $V_S = 5.5\text{V}$ | -0.1 to 5.6 | | | | | V | TYP | |
| Common Mode Rejection Ratio (CMRR) | $V_S = 5.5\text{V}$, $V_{CM} = -0.1\text{V}$ to 4V | 90 | 73 | 70 | 70 | 65 | dB | MIN | |
| | $V_S = 5.5\text{V}$, $V_{CM} = -0.1\text{V}$ to 5.6V | 83 | | | | | dB | MIN | |
| Open-Loop Voltage Gain (A_{OL}) | $R_L = 600\Omega$, $V_{OUT} = 0.15\text{V}$ to 4.85V | 97 | 90 | 87 | 86 | 79 | dB | MIN | |
| | $R_L = 10\text{k}\Omega$, $V_{OUT} = 0.05\text{V}$ to 4.95V | 108 | | | | | dB | MIN | |
| Input Offset Voltage Drift ($\Delta V_{OS}/\Delta T$) | | 2.4 | | | | | $\mu\text{V}/^\circ\text{C}$ | TYP | |
| Output Characteristics | | | | | | | | | |
| Output Voltage Swing from Rail | $R_L = 600\Omega$ | 0.1 | | | | | V | TYP | |
| | $R_L = 10\text{k}\Omega$ | 0.015 | | | | | V | TYP | |
| Output Current (I_{OUT}) | | 53 | 49 | 45 | 40 | 35 | mA | MIN | |
| Closed-Loop Output Impedance | $f = 200\text{kHz}$, $G = +1$ | 3 | | | | | Ω | TYP | |
| Power Supply | | | | | | | | | |
| Operating Voltage Range | | | 2.5 | 2.5 | 2.5 | 2.5 | V | MIN | |
| | | | 5.5 | 5.5 | 5.5 | 5.5 | V | MAX | |
| Power Supply Rejection Ratio (PSRR) | $V_S = 2.5\text{V}$ to 5.5V , $V_{CM} = (-V_S) + 0.5\text{V}$ | 91 | 74 | 72 | 72 | 68 | dB | MIN | |
| Quiescent Current/Amplifier (I_Q) | $I_{OUT} = 0$ | 470 | 650 | 727 | 750 | 815 | μA | MAX | |
| Dynamic Performance | | | | | | | | | |
| Gain-Bandwidth Product (GBP) | $R_L = 10\text{k}\Omega$ | 6 | | | | | MHz | TYP | |
| Phase Margin (ϕ_O) | | 60 | | | | | degrees | TYP | |
| Full Power Bandwidth (BW_P) | < 1% distortion, $R_L = 600\Omega$ | 250 | | | | | kHz | TYP | |
| Slew Rate (SR) | $G = +1$, 2V Step, $R_L = 10\text{k}\Omega$ | 3.7 | | | | | $\text{V}/\mu\text{s}$ | TYP | |
| Settling Time to 0.1% (t_S) | $G = +1$, 2V Step, $R_L = 600\Omega$ | 2.1 | | | | | μs | TYP | |
| Overload Recovery Time | $V_{IN} \cdot G = V_S$, $R_L = 600\Omega$ | 0.9 | | | | | μs | TYP | |
| Noise Performance | | | | | | | | | |
| Input Voltage Noise Density (e_n) | $f = 1\text{kHz}$ | 12 | | | | | $\text{nV}/\sqrt{\text{Hz}}$ | TYP | |
| Input Current Noise Density (i_n) | $f = 1\text{kHz}$ | 3 | | | | | $\text{fA}/\sqrt{\text{Hz}}$ | TYP | |







TYPICAL PERFORMANCE CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

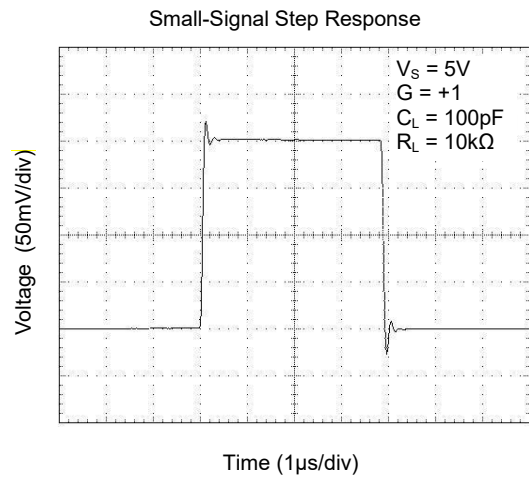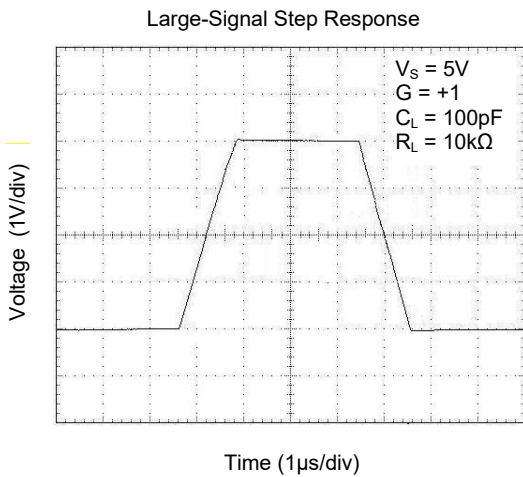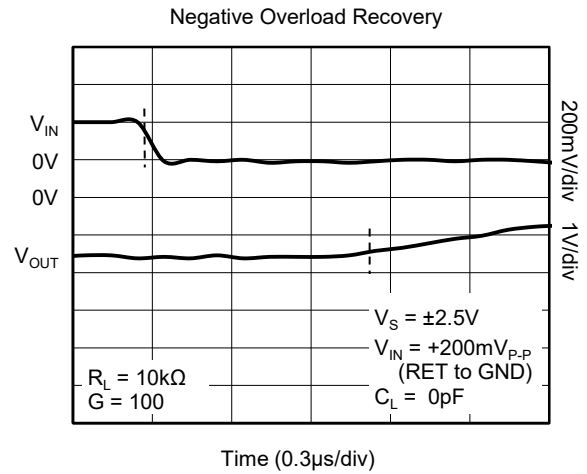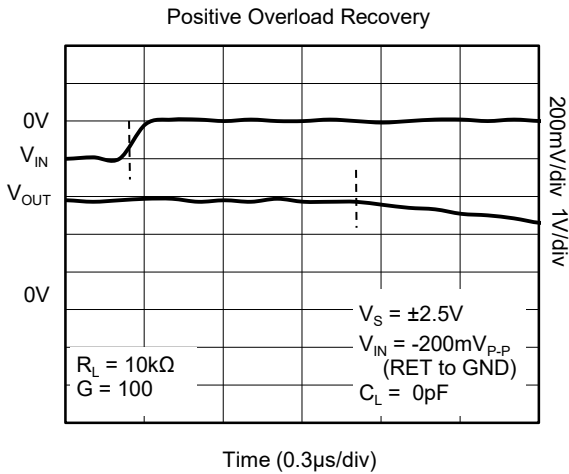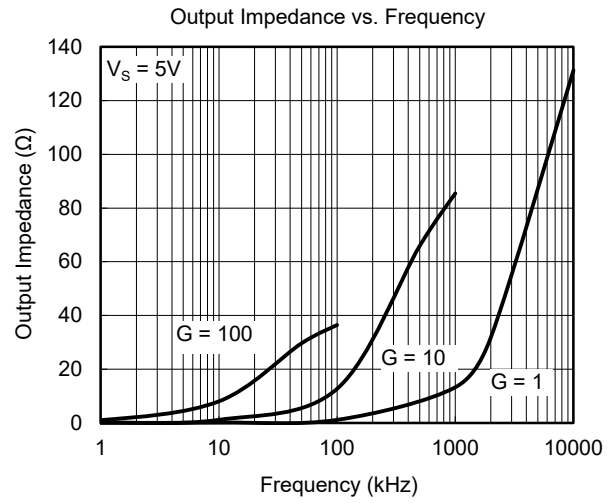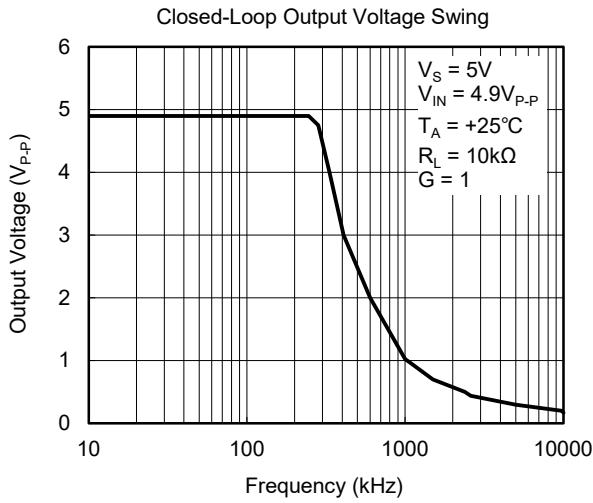







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

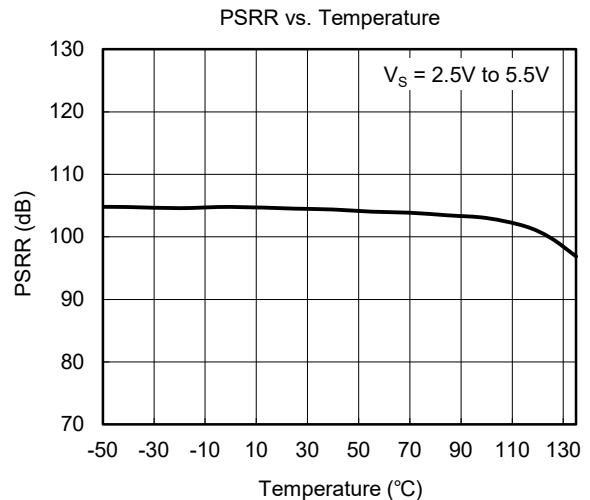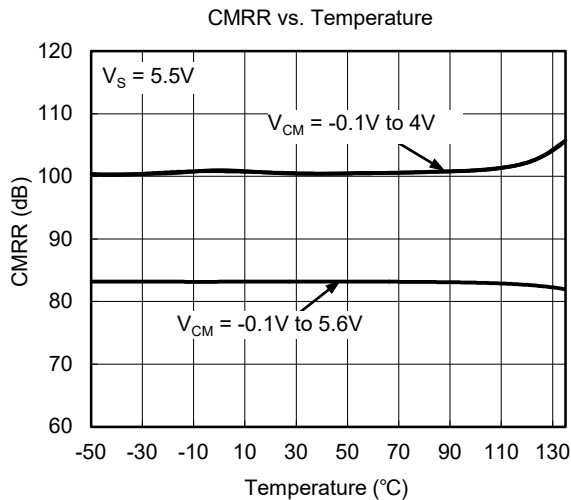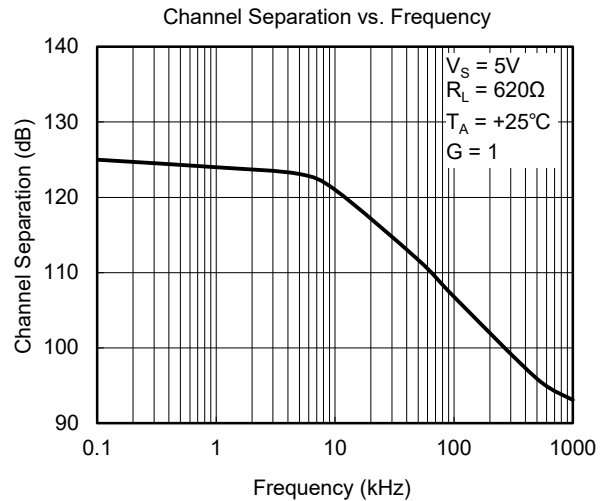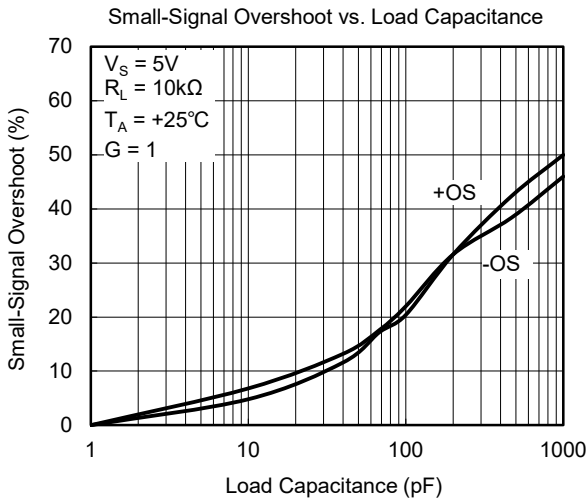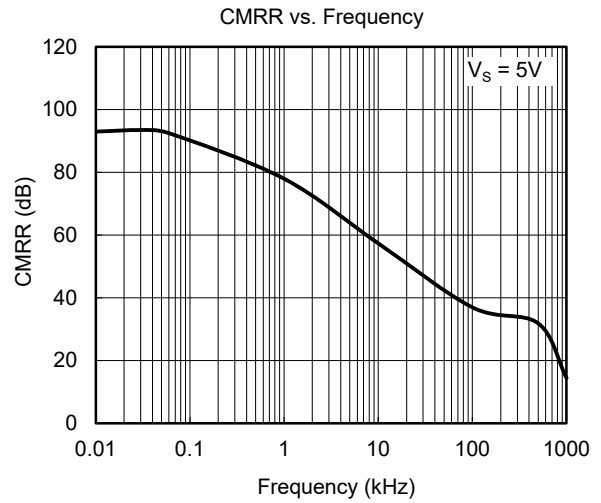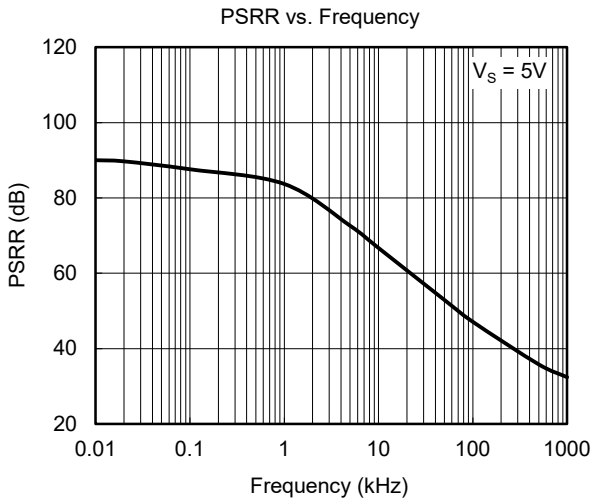







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

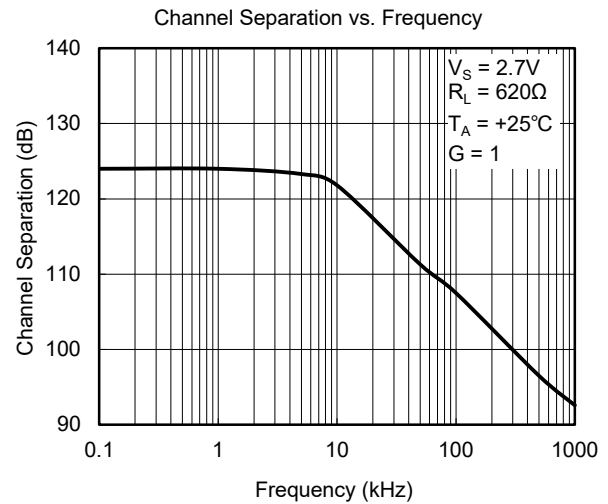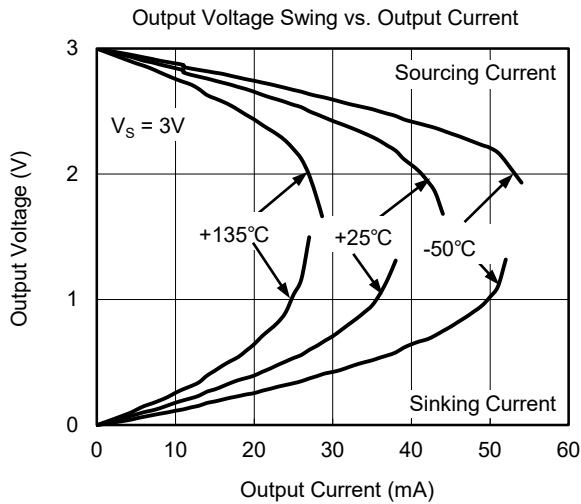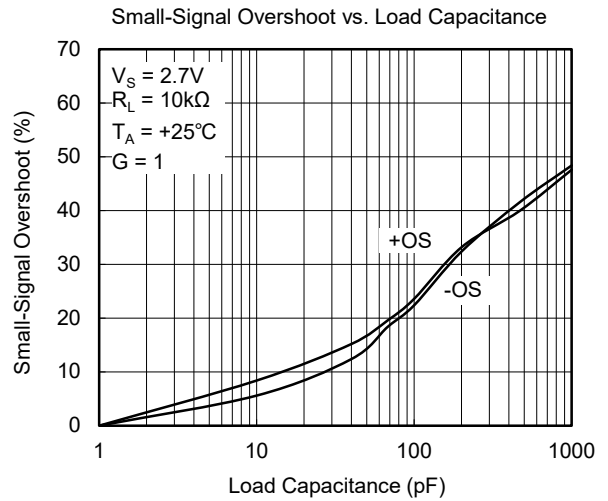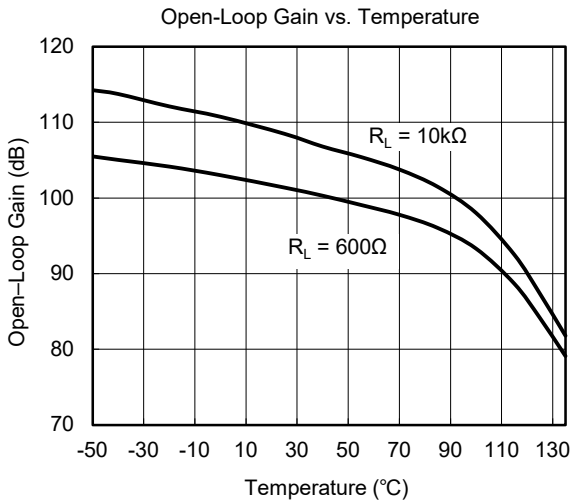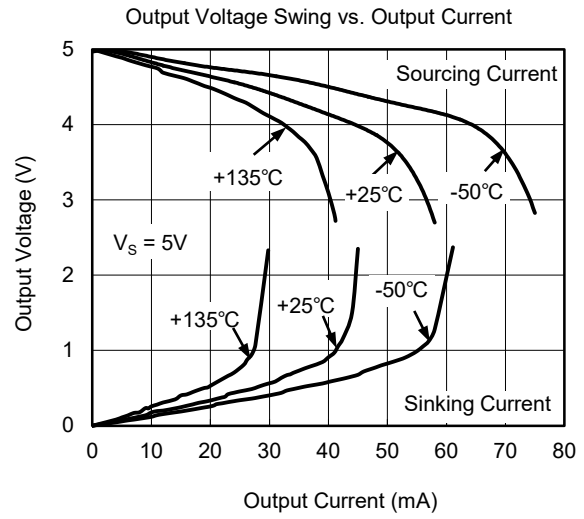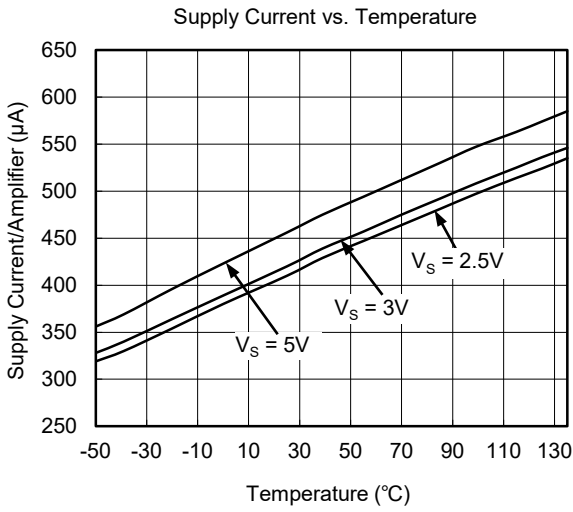

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

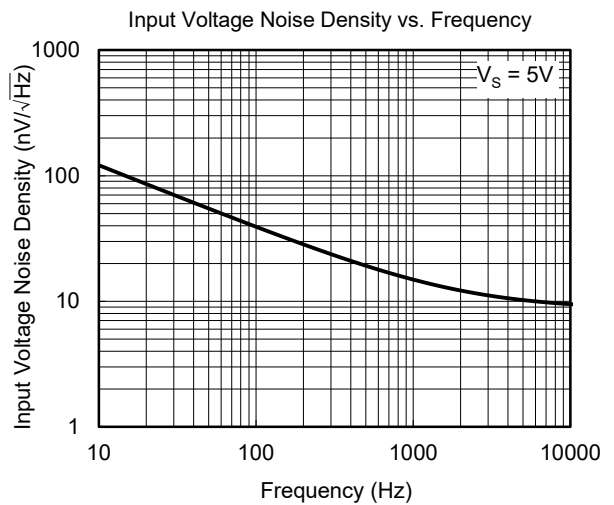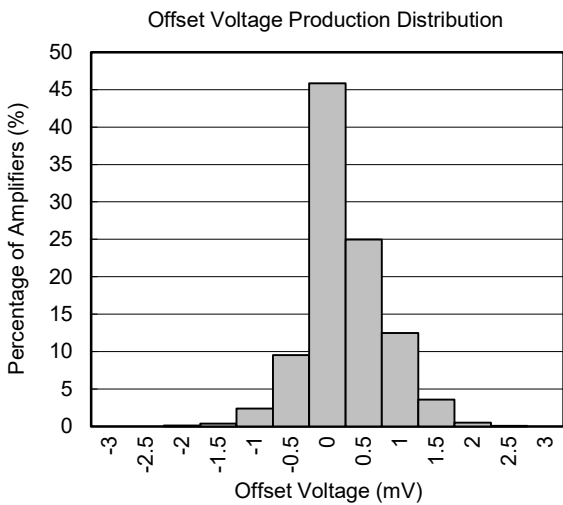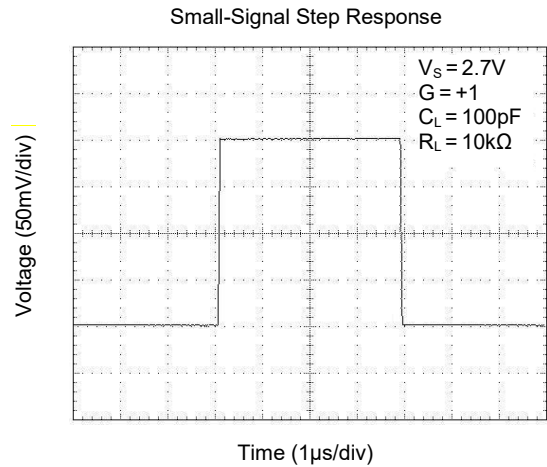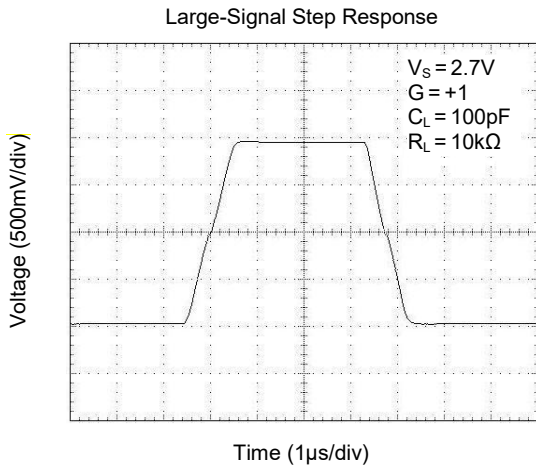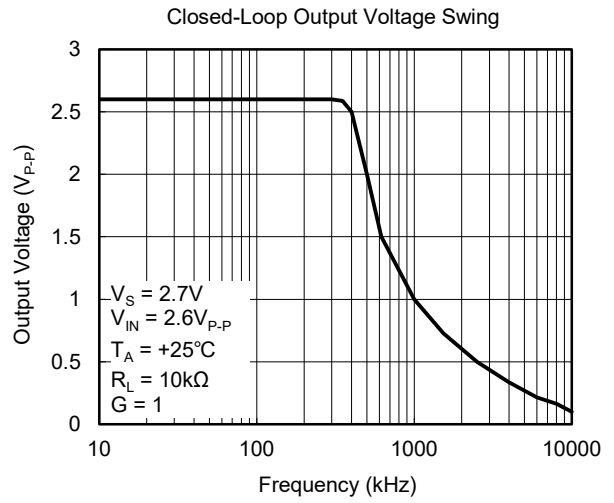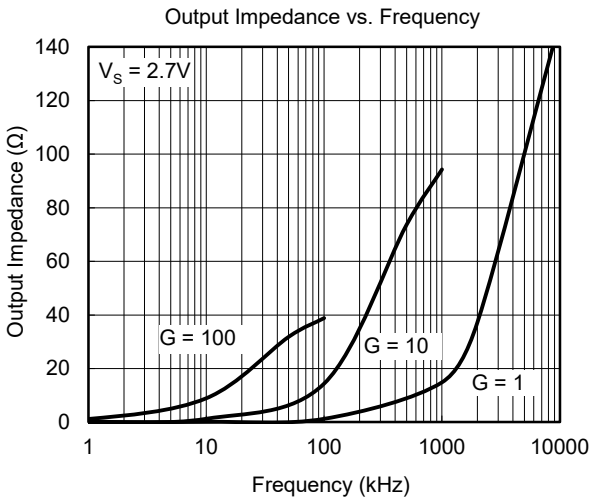

APPLICATION NOTES

Driving Capacitive Loads

The SGM8634 can directly drive 1000pF in unity-gain without oscillation. The unity-gain follower (buffer) is the most sensitive configuration to capacitive loading. Direct capacitive loading reduces the phase margin of the amplifier and this results in ringing or even oscillation. Applications that require greater capacitive driving capability should use an isolation resistor between the output and the capacitive load like the circuit in Figure 1. The isolation resistor R_{ISO} and the load capacitor C_L form a zero to increase stability. The bigger the R_{ISO} resistor value, the more stable V_{OUT} will be. Note that this method results in a loss of gain accuracy because R_{ISO} forms a voltage divider with the R_{LOAD} .

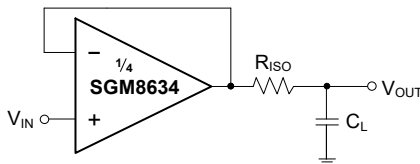


Figure 1. Indirectly Driving Heavy Capacitive Load

An improved circuit is shown in Figure 2. It provides DC accuracy as well as AC stability. R_F provides the DC accuracy by connecting the inverting signal with the output. C_F and R_{ISO} serve to counteract the loss of phase margin by feeding the high frequency component of the output signal back to the amplifier's inverting input, thereby preserving phase margin in the overall feedback loop.

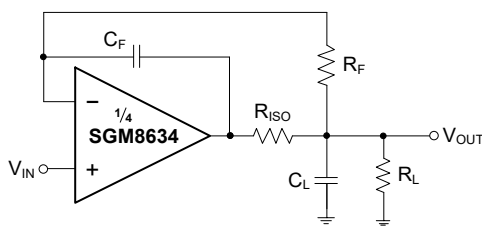


Figure 2. Indirectly Driving Heavy Capacitive Load with DC Accuracy

For non-buffer configuration, there are two other ways to increase the phase margin: (a) by increasing the amplifier's closed-loop gain or (b) by placing a capacitor in parallel with the feedback resistor to counteract the parasitic capacitance associated with inverting node.

Power Supply Bypassing and Layout

The SGM8634 operates from either a single 2.5V to 5.5V supply or dual $\pm 1.25V$ to $\pm 2.75V$ supplies. For single-supply operation, bypass the power supply $+V_S$ with a 0.1µF ceramic capacitor which should be placed close to the $+V_S$ pin. For dual-supply operation, both the $+V_S$ and the $-V_S$ supplies should be bypassed to ground with separate 0.1µF ceramic capacitors. 2.2µF tantalum capacitor can be added for better performance.

Good PC board layout techniques optimize performance by decreasing the amount of stray capacitance at the operational amplifier's inputs and output. To decrease stray capacitance, minimize trace lengths and widths by placing external components as close to the device as possible. Use surface-mount components whenever possible.

For the operational amplifier, soldering the part to the board directly is strongly recommended. Try to keep the high frequency current loop area small to minimize the EMI (electromagnetic interference).

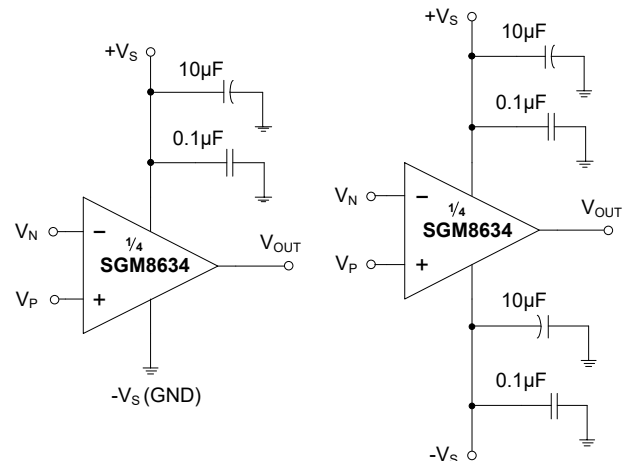


Figure 3. Amplifier with Bypass Capacitors

Grounding

A ground plane layer is important for SGM8634 circuit design. The length of the current path in an inductive ground return will create an unwanted voltage noise. Broad ground plane areas will reduce the parasitic inductance.

Input-to-Output Coupling

To minimize capacitive coupling, the input and output signal traces should not be in parallel. This helps reduce unwanted positive feedback.

TYPICAL APPLICATION CIRCUITS

Differential Amplifier

The circuit shown in Figure 4 performs the difference function. If the resistor ratios are equal ($R_4/R_3 = R_2/R_1$), then $V_{OUT} = (V_P - V_N) \times R_2/R_1 + V_{REF}$.

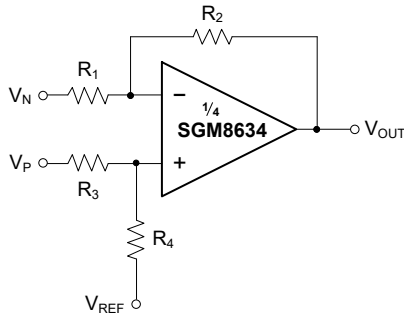


Figure 4. Differential Amplifier

Instrumentation Amplifier

The circuit in Figure 5 performs the same function as that in Figure 4 but with a high input impedance.

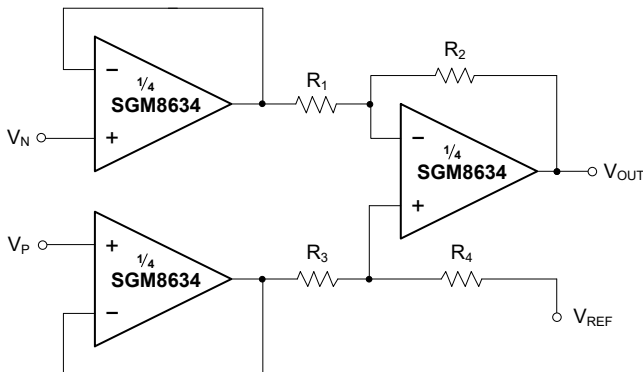


Figure 5. Instrumentation Amplifier

Active Low-Pass Filter

The low-pass filter shown in Figure 6 has a DC gain of $(-R_2/R_1)$ and the -3dB corner frequency is $1/2\pi R_2 C$. Make sure the filter bandwidth is within the bandwidth of the amplifier. Feedback resistors with large values can couple with parasitic capacitance and cause undesired effects such as ringing or oscillation in high-speed amplifiers. Keep resistor values as low as possible and consistent with output loading consideration.

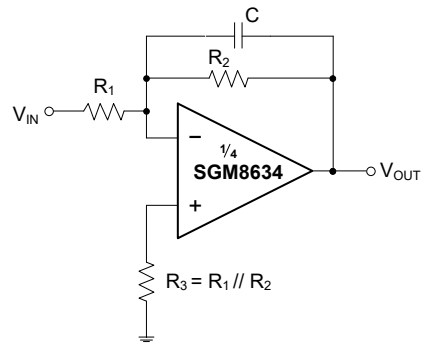


Figure 6. Active Low-Pass Filter



REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



| DECEMBER 2015 – REV.C.1 to REV.C.2 | Page |
|--|--------|
| New version..... | All |
| February 2015 – REV.C to REV.C.1 | Page |
| Changed Package Outline Dimensions section | 17, 18 |

PACKAGE OUTLINE DIMENSIONS

TSSOP-14

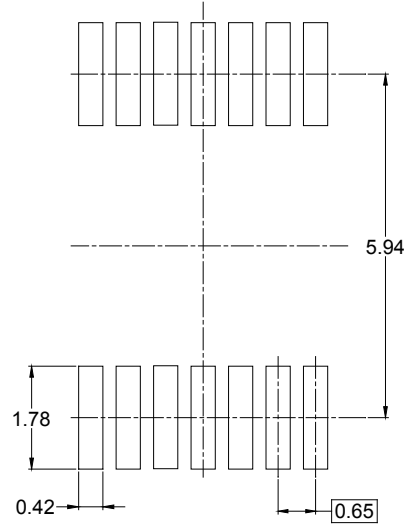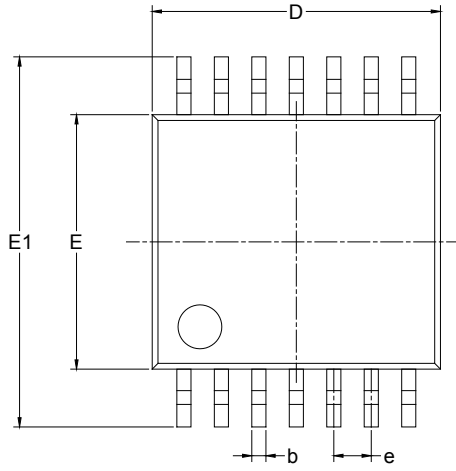


RECOMMENDED LAND PATTERN (Unit: mm)

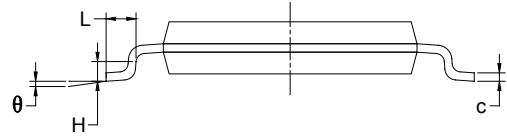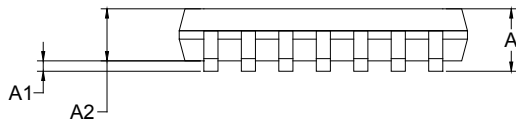


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | | 1.200 | | 0.047 |
| A1 | 0.050 | 0.150 | 0.002 | 0.006 |
| A2 | 0.800 | 1.050 | 0.031 | 0.041 |
| b | 0.190 | 0.300 | 0.007 | 0.012 |
| c | 0.090 | 0.200 | 0.004 | 0.008 |
| D | 4.860 | 5.100 | 0.191 | 0.201 |
| E | 4.300 | 4.500 | 0.169 | 0.177 |
| E1 | 6.250 | 6.550 | 0.246 | 0.258 |
| e | 0.650 BSC | | 0.026 BSC | |
| L | 0.500 | 0.700 | 0.02 | 0.028 |
| H | 0.25 TYP | | 0.01 TYP | |
| θ | 1° | 7° | 1° | 7° |

PACKAGE OUTLINE DIMENSIONS

SOIC-14

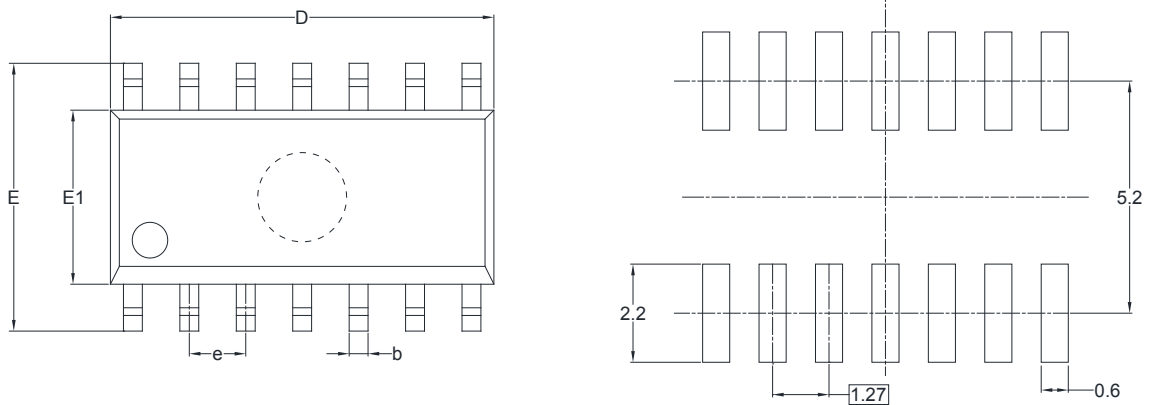

RECOMMENDED LAND PATTERN (Unit: mm)

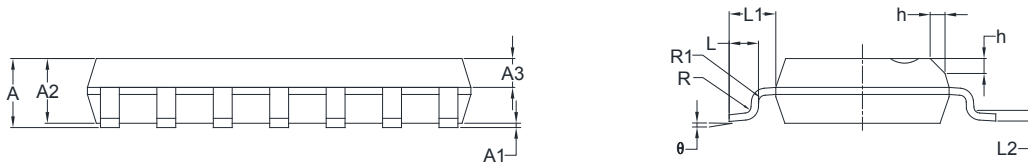

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|------------------------------|------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.35 | 1.75 | 0.053 | 0.069 |
| A1 | 0.10 | 0.25 | 0.004 | 0.010 |
| A2 | 1.25 | 1.65 | 0.049 | 0.065 |
| A3 | 0.55 | 0.75 | 0.022 | 0.030 |
| b | 0.36 | 0.49 | 0.014 | 0.019 |
| D | 8.53 | 8.73 | 0.336 | 0.344 |
| E | 5.80 | 6.20 | 0.228 | 0.244 |
| E1 | 3.80 | 4.00 | 0.150 | 0.157 |
| e | 1.27 BSC | | 0.050 BSC | |
| L | 0.45 | 0.80 | 0.018 | 0.032 |
| L1 | 1.04 REF | | 0.040 REF | |
| L2 | 0.25 BSC | | 0.01 BSC | |
| R | 0.07 | | 0.003 | |
| R1 | 0.07 | | 0.003 | |
| h | 0.30 | 0.50 | 0.012 | 0.020 |
| θ | 0° | 8° | 0° | 8° |

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

| Package Type | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|--------------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| TSSOP-14 | 13" | 12.4 | 6.95 | 5.60 | 1.20 | 4.0 | 8.0 | 2.0 | 12.0 | Q1 |
| SOIC-14 | 13" | 16.4 | 6.60 | 9.30 | 2.10 | 4.0 | 8.0 | 2.0 | 16.0 | Q1 |

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

| Reel Type | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-----------|-------------|------------|-------------|--------------|
| 13" | 386 | 280 | 370 | 5 |

DD0002