


MORNSUN®

IB_S-2W Series


2W, FIXED INPUT, ISOLATED & REGULATED SINGLE OUTPUT DC-DC CONVERTER



Patent Protection RoHS

MODEL SELECTION

IB0505S-2W

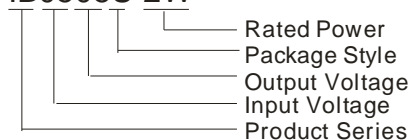

Rated Power
Package Style
Output Voltage
Input Voltage
Product Series

FEATURES

- | Small Footprint
- | SIP Package
- | 1KVDC Isolation
- | Temperature Range: -40°C to +85°C
- | No Heat sink Required
- | Internal SMD Construction
- | No External Component Required
- | Industry Standard Pinout
- | RoHS Compliance

APPLICATIONS

The IB_S-2W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\pm 5\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

PRODUCT PROGRAM

Model	Input Voltage (VDC)		Output Voltage (VDC)	Output Current (mA)		Input Current (mA)(Typ.)		Efficiency(%) @Max. Load	
	Nominal	Range		Max.	Min.	@Max. Load	@No Load	Min.	Typ.
IB0505S-2W	5	4.75-5.25	5	400	40	580	25	65	69
IB0512S-2W			12	150	15	507		67	71
IB1205S-2W	12	11.4-12.6	5	400	40	238	20	66	70
IB1215S-2W			15	133	13	231		68	72
IB1505S-2W	15	14.25-15.75	5	400	40	190	15	66	70
IB2405S-2W	24	22.8-25.2	5	400	40	119	8	66	70

OUTPUT SPECIFICATIONS

Item	Test condition	Min.	Typ.	Max.	Unit
Line regulation	For V_{in} change of $\pm 5\%$	--	--	± 0.5	%
Load regulation	10% to 100% full load	--	± 1	± 2	
Output voltage accuracy	100% load	--	--	± 3	
Temperature drift	100% load	--	--	0.03	%/°C
Output ripple*	20MHz Bandwidth	--	20	30	mVp-p
Output Noise*	20MHz Bandwidth	--	50	150	

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at DC-DC Application Notes.

COMMON SPECIFICATION


Item	Test Conditions	Min.	Typ.	Max.	Unit
Storage humidity range	Non condensing	--	--	95	%
Operating temperature		-40	--	85	°C
Storage temperature		-55	--	125	
Lead temperature	Ta=25°C	--	40	60	
Temp. rise at full load	1.5mm from case for 10 seconds	--	--	300	
Cooling		Free air convection			
Case material		Plastic(UL94-V0)			

Short circuit protection		Continuous			
Switching Frequency	100% load, nominal input	--	100	300	KHz
MTBF	MIL-HDBK-217F@25°C	3500	--	--	K hours
Weight		--	2.4	--	g

ISOLATION SPECIFICATIONS


Item	Test condition	Min.	Typ.	Max.	Unit
Isolation voltage	Tested for 1 minute and 1mA max	1000	--	--	VDC
Isolation resistance	Test at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-Output, 100KHz/0.1V	--	60	--	pF

TYPICAL CHARACTERISTICS

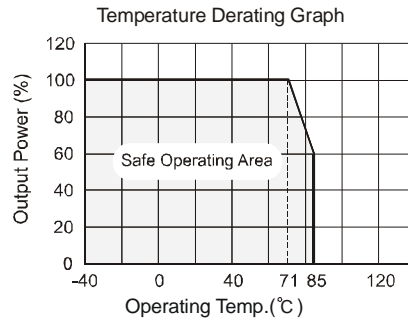


OUTLINE DIMENSIONS & PIN CONNECTIONS

MECHANICAL DIMENSIONS

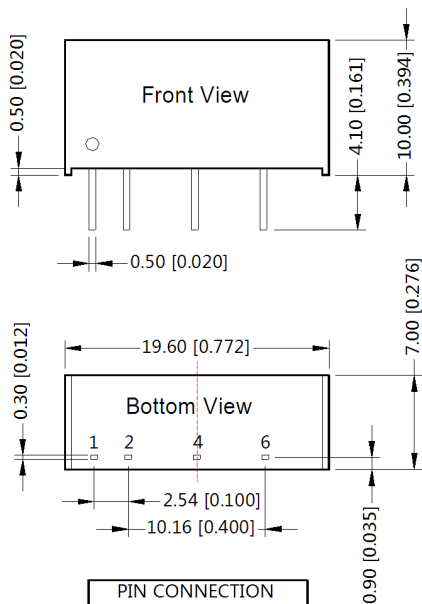


PIN CONNECTION	
Pin	Function
1	Vin
2	GND
4	0V
6	+Vo


Note:
 Unit:mm[inch]
 Pin section tolerances:±0.1[±0.004]
 General tolerances:±0.25[±0.010]



RECOMMENDED FOOTPRINT DETAILS

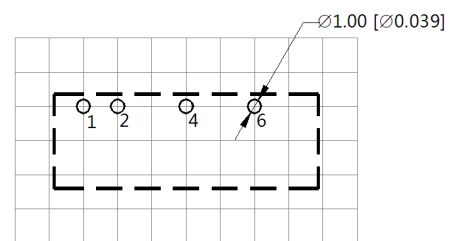

TUBE PACKAGING DIMENSIONS

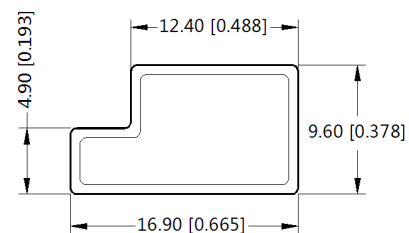

Note:
 Unit:mm[inch]
 General tolerances:±0.50[±0.020]
 L=530[20.866] Tube Quantity:25 pcs
 L=220[8.661] Tube Quantity:10 pcs
 Inner carton(S): L*W*H=255*170*80
 Outer carton(S): L*W*H=375*280*270, 6 inner cartons(S)
 Inner carton(L): L*W*H=580*200*100
 Outer carton(L): L*W*H=600*215*220, 2 inner cartons(L)
 Outer carton(L): L*W*H=600*215*325, 3 inner cartons(L)


APPLICATION NOTE

1) Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load could not be less than 10% of the full load. If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load.

2) Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

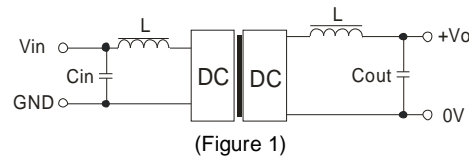

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

EXTERNAL CAPACITOR TABLE (TABLE 1)

Vin (VDC)	Cin (μ F)	Vout (VDC)	Cout (μ F)
5	4.7	5	4.7
12	2.2	12	2.2
15	1	15	1
24	0.47	--	--


It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

3) Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

4) Input Over-voltage Protection Circuit

The simplest device for input over-voltage protection is a linear voltage regulator with overheat protection that is connected to the input end in series (Figure 2).

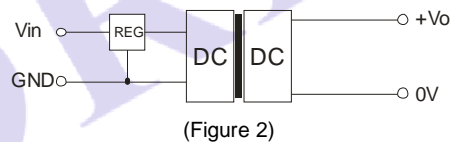

5) When the environment temperature is higher than 71°C, the product output power should be less than 60% of the rated power.

6) It is not recommended to increase the output power capability by connecting two or more converters in parallel. The product is not hot-swappable.

Note:

1. Operation under minimum load will not damage the converter; However, they may not meet all specifications.
2. Max. Capacitive Load is tested at nominal input voltage and full load.
3. Unless otherwise noted, All specifications are measured at $T_a=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load.
4. In this datasheet, all test methods are based on our corporate standards.
5. All characteristics are for listed models, and non-standard models may perform differently. Please contact our technical support for more detail.
6. Please contact our technical support for any specific requirement.
7. Specifications of this product are subject to changes without prior notice.

MORNSUN Science & Technology Co.,Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou, P.R.China.

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

[Http://www.mornsun-power.com](http://www.mornsun-power.com)