

# High Precision Positioning Inductive Proximity Sensor E2C-EDA

CSM\_E2C-EDA\_DS\_E 7.1

CE

## Proximity Sensor with Separate Amplifier Enables Easily Making High-precision Sensitivity Settings.

- Wide variety of Sensor Heads to select according to the application. Flexible cables are used between Preamplifiers and Amplifier Units of the Sensor Heads.
- High resistance to changes in ambient temperature. Temperature characteristics of 0.08%/°C (for 5.4-dia. models).
- Make simple and reliable detection settings with micron-level precision using the teaching function.
- Check the sensing excess gain level on the digital display.
- Support for high-precision positioning and screening with fine positioning to maximize variations.
- The E2C-EDA0 supports an EtherCAT Sensor Communications Unit or CompoNet Sensor Communications Unit.



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.



Be sure to read *Safety Precautions* on page 10.

## Ordering Information

### Sensors [Refer to *Dimensions* on page 12.]

#### Sensor Heads

Type	Appearance	Sensing distance	Repeat accuracy	Cable specification	Model
Shielded	Cylindrical	3 dia. × 18 mm	0.6 mm	1 μm	Free cutting *2 E2C-EDR6-F
		5.4 dia. × 18 mm	1 mm	1 μm	Standard *2 E2C-ED01
					Free cutting *2 E2C-ED01-F
		8 dia. × 22 mm	2 mm	2 μm	With Protective Spiral Tube *1 *2 E2C-ED01-S
	Screw				Standard *2 E2C-ED02
		M10 × 22 mm	2 mm	2 μm	Free cutting *2 E2C-ED02-F
					With Protective Spiral Tube *1 *2 E2C-ED02-S
	Flat				Standard *2 E2C-EV05
		30 × 14 × 4.8 mm	5 mm	2 μm	Free cutting *2 E2C-EV05-F
					With Protective Spiral Tube *1 *2 E2C-EV05-S
Unshielded	Screw				Standard *2 E2C-EM07M
		M18 × 46.3 mm	7 mm	5 μm	Free cutting *2 E2C-EM07M-F
					With Protective Spiral Tube *1 *2 E2C-EM07M-S
Heat-resistant	Screw	M12 × 22 mm	2 mm	2 μm	Standard *2 E2C-EM02H

\*1 Ask your OMRON representative for information on the Protective Spiral Tube.

\*2 Overall length of free-cut cable: 3.5 m, Length from the Sensor Head to the Preamplifier: 0.5 m (Overall length of the standard cable with Protective Spiral Tube: 2.5 m, Length from the Sensor Head to the Preamplifier: 2 m)

**Amplifier Units****Amplifier Units with Cables**

Item		Appearance	Functions	Model	
				NPN output	PNP output
Advanced models	Twin-output models		Area output, open circuit detection, differential operation	E2C-EDA11 2M	E2C-EDA41 2M
	External-input models		Remote setting, differential operation	E2C-EDA21 2M	E2C-EDA51 2M

**Amplifier Units with Wire-saving Connectors (An Amplifier Unit Connector (sold separately) is required.)**

Item		Appearance	Functions	Model	
				NPN output	PNP output
Advanced models	Twin-output models		Area output, open circuit detection, differential operation	E2C-EDA6	E2C-EDA8
	External-input models		Remote setting, differential operation	E2C-EDA7	E2C-EDA9


**Note:** These models allow you to use an E3X-DRT21-S VER.3 Sensor Communications Unit. When using the E3X-DRT21-S VER.3, use an E3X-CN02 Connector without a Cable for the Wire-saving Connector.

**Amplifier Unit with Connector for EtherCAT or CompoNet Sensor Communications Units [Refer to Dimensions page 16]**

Item		Appearance	Functions	Model	Applicable Sensor Communications Unit
Advanced model	Twin-output model		Area output, open circuit detection, differential operation	E2C-EDA0	E3X-ECT
					E3X-CRT

**Wire-saving Connectors (Order Separately)**

**Note:** Protector seals provided. [Refer to E3X-DA-S/MDA.]

Item	Appearance	Cable length	No. of conductors	Model
Master Connector		2 m	4	E3X-CN21
Slave Connector			2	E3X-CN22

**Ordering Precaution for Amplifier Units with Wire-saving Connectors**

A Connector is not provided with the Amplifier Unit.  
Refer to the following tables when ordering.

Amplifier Unit			Applicable Connector (Order Separately)	
Model	NPN output	PNP output	Master Connector	Slave Connector
Advanced models	E2C-EDA6	E2C-EDA8	E3X-CN21	E3X-CN22
	E2C-EDA7	E2C-EDA9		

**When Using 5 Amplifier Units**

Amplifier Units (5 Units) + 1 Master Connector 4 Slave Connectors

**Mobile Console (Order Separately) [Refer to E3X-DA-S/MDA.]**

Appearance	Model	Remarks
	<b>E3X-MC11-SV2 (model number of set)</b>	Mobile Console with Head, Cable, and AC adapter provided as accessories
	<b>E3X-MC11-C1-SV2</b>	Mobile Console
	<b>E3X-MC11-H1</b>	Head
	<b>E39-Z12-1</b>	Cable (1.5 m)

**Note:** Use the E3X-MC11-SV2 Mobile Console with E2C-EDA-series Amplifier Units. If you use a Mobile Console like the E3X-MC11-S, some functions may not operate. For details, refer to *Ratings and Specifications* for E3X-DA-S/MDA.


**Accessories (Order Separately)**
**Mounting Bracket**

A Mounting Bracket is not provided with the Amplifier Unit. Order a Mounting Bracket separately if required.  
[Refer to E39-L, F39-L, E39-S, and E39-R.]

Appearance	Model	Quantity
	<b>E39-L143</b>	1

**End Plate**

An End Plate is not provided with the Amplifier Unit. Order an End Plate separately if required.  
[Refer to PFP-□.]

Appearance	Model	Quantity
	<b>PFP-M</b>	1

**Extension Cables for Sensor Head**

A Mounting Bracket is not provided with the Amplifier Unit. Order an Extension Cable separately if required.  
[Refer to Dimensions on page 13.]

Cable length	Model	Quantity
2 m	<b>E22-XC2R</b>	1
7 m	<b>E22-XC7R</b>	

## Rating and Specifications

### Sensor Heads

Model	E2C-EDR6-F	E2C-ED01(-□)	E2C-ED02(-□)	E2C-EM02(-□)	E2C-EM07(-□)	E2C-EV05(-□)	E2C-EM02H
Item	3 dia. × 18 mm	5.4 dia. × 18 mm	8 dia. × 22 mm	M10 × 22 mm	M18 × 46.3 mm	30 × 14 × 4.8 mm	M12 × 22 mm
Sensing distance	0.6 mm	1 mm	2 mm		7 mm	5 mm	2 mm
Sensing object	Magnetic metal (The sensing distance will decrease when sensing non-magnetic metal. Refer to <i>Engineering Data (Reference Value)</i> on page 6.)						
Standard sensing object	5 × 5 × 3 mm	10 × 10 × 3 mm		22 × 22 × 3 mm	15 × 15 × 3 mm	20 × 20 × 3 mm	
Repeat accuracy *1	1 µm	2 µm		5 µm	2 µm		
Hysteresis distance	Variable						
Temperature characteristic *1	Sensor Head	0.3%/°C	0.08%/°C			0.04%/°C	0.2%/°C
	Preamplifier and Amplifier	0.08%/°C					
Ambient temperature *2	Operating	-10°C to 60°C (with no icing or condensation)				-10°C to 200°C *3	
	Storage	-10°C to 60°C (with no icing or condensation)	-20°C to 70°C (with no icing or condensation)				
Ambient humidity		Operating/storage: 35% to 85% (with no condensation)					
Insulation resistance		50 MΩ min. (at 500 VDC)					
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min between current carry parts and case					
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions					
Shock resistance		Destruction: 500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions					
Degree of protection		IEC60529 IP67				IEC60529 IP60 *4	
Connection method		Connector (standard cable length: 2.5 m (2 m between Head and Preamplifier) "-F" model cable length: 3.5 m (0.5 m between Head and Preamplifier))					
Weight (packed state)		Approx. 120 g (Models with protective spiral tube ("S" models) are approx. 90 g heavier.)					
Material	Sensor Head	Case	Brass	Stainless steel	Brass	Zinc	Brass
		Sensing surface	Heat-resistant ABS				PEEK
		Clamping nut	---	Nickel-plated brass		---	Nickel-plated brass
		Toothed washer	---	Zinc-plated iron		---	Zinc-plated iron
	Preamplifier	PES					
Accessories	Preamplifier Mounting Brackets, Instruction Manual						

\*1 The repeat accuracy and temperature characteristic are for a standard sensing object positioned midway through the rated sensing distance.

\*2 A sudden temperature rise even within the rated temperature range may degrade characteristics.

\*3 For the Sensor Head only without the preamplifier (-10 to 60°C). With no icing or condensation.

\*4 Do not operate in areas exposed to water vapor because the enclosure is not waterproof.

## Amplifier Units

Type		Advanced Models with Twin Outputs			Advanced Models with External Inputs								
		Pre-wired Model	Model with Wire-saving Connector	Model for Sensor Communications Unit	Pre-wired Model	Model with Wire-saving Connector							
Model	NPN output	E2C-EDA11	E2C-EDA6	E2C-EDA0 *1	E2C-EDA21	E2C-EDA7							
	PNP output	E2C-EDA41	E2C-EDA8		E2C-EDA51	E2C-EDA9							
<b>Supply voltage</b>		12 to 24 VDC ±10%, ripple (p-p): 10% max.											
<b>Power consumption</b>		1,080 mW max. (current consumption: 45 mA at power supply voltage of 24 VDC)											
<b>Control output</b>		Load power supply voltage: 26.4 VDC max.; NPN/PNP open collector output; load current: 50 mA max. (residual voltage: 1 V max.)											
Response time	Super-high-speed mode *2	150 µs for operation and reset respectively	—	—	150 µs for operation and reset respectively								
	High-speed mode	300 µs for operation and reset respectively											
	Standard mode	1 ms for operation and reset respectively											
	High-resolution mode	4 ms for operation and reset respectively											
Functions	Differential detection	Switchable between single edge and double edge detection mode Single edge: Can be set to 300 µs, 500 µs, 1 ms, 10 ms, or 100 ms Double edge: Can be set to 500 µs, 1 ms, 2 ms, 20 ms, or 200 ms.											
	Timer function	Select from OFF-delay, ON-delay, or one-shot timer. 1 ms to 5 s (1 to 20 ms set in 1-ms increments, 20 to 200 ms set in 10-ms increments, 200 ms to 1 s set in 100-ms increments, and 1 to 5 s set in 1 s-increments)											
	Zero-reset	Negative values can be displayed. (Threshold is not shifted.)											
	Initial reset	Settings can be returned to defaults as required.											
	Mutual interference prevention	Possible for up to 5 Units. *2 Intermittent oscillation method (Response time = (number of Units connected + 1) × 15 ms)											
	Hysteresis settings	Setting range: 10 to 4,000											
Digital display	I/O settings	Output setting (Select from channel 2 output, area output, self-diagnosis, or open circuit detection.)			Input setting (Select from teaching, fine positioning, zero-reset, synchronous detection.)								
	Select from the following: Incident level + threshold, incident level percentage + threshold, incident light peak level + incident light bottom level (updated with output), long bar display, incident level + peak hold, incident level + channel												
	Display orientation	Switching between normal/reversed display is possible.											
Ambient temperature *3	Operating: When connecting 1 to 2 Units: -10°C to 55°C, When connecting 3 to 5 Units: -10°C to 50°C, When connecting 6 to 16 Units: -10°C to 45°C												
	When used in combination with an EDR6-F When connecting 3 to 4 Units: -10°C to 50°C, When connecting 5 to 8 Units: -10°C to 45°C, When connecting 9 to 16 Units: -10°C to 40°C												
	Storage: -20°C to 70°C (with no icing)												
Ambient humidity	Operating/storage: 35% to 85% (with no condensation)												
Insulation resistance	20 MΩ min. (at 500 VDC)												
Dielectric strength	1,000 VAC at 50/60 Hz for 1 min												
Vibration resistance (Destruction)	10 to 55 Hz with a 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions	10 to 150 Hz with a 0.7-mm double amplitude for 80 min each in X, Y, and Z directions	10 to 55 Hz with a 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions										
Shock resistance (Destruction)	500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions	150 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions	500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions										
Degree of protection	IEC60529 IP50												
Connection method	Pre-wired	Wire-saving connector	Connector for Sensor Communications Unit	Pre-wired	Wire-saving connector								
Weight (packed state)	Approx. 100 g	Approx. 55 g	Approx. 55 g	Approx. 100 g	Approx. 55 g								
Material	Case	PBT (polybutylene terephthalate)											
	Cover	Polycarbonate											

\*1 This model allow you to use an E3X-ECT EtherCAT Sensor Communications Unit or E3X-CRT CompoNet Sensor Communications Unit.

\*2 Communications functions, mutual interference prevention, and communications with the Mobile Console are all disabled if the detection mode is set to the super-high-speed mode.


\*3 The following temperature ranges apply for operation when an E3X-ECT or E3X-CRT Sensor Communications Unit is used with the E2C-EDA0: Groups of 1 or 2 Amplifier Units: 0 to 55°C, Groups of 3 to 5 Amplifier Units: 0 to 50°C, Groups of 6 to 16 Amplifier Units: 0 to 45°C, Groups of 17 to 30 Amplifier Units (with the E3X-ECT): 0 to 40°C.

The following temperature ranges apply when an E3X-ECT or E3X-CRT Sensor Communications Unit is used with the E2C-EDR6-F: Groups of 3 or 4 Amplifier Units: 0 to 50°C, Groups of 5 to 8 Amplifier Units: 0 to 45°C, Groups of 9 to 16 Amplifier Units: 0 to 40°C, Groups of 17 to 30 Amplifier Units (with the E3X-ECT): 0 to 35°C.


## Engineering Data (Reference Value)

### Sensing Distance vs. Display Values


E2C-EDR6-F

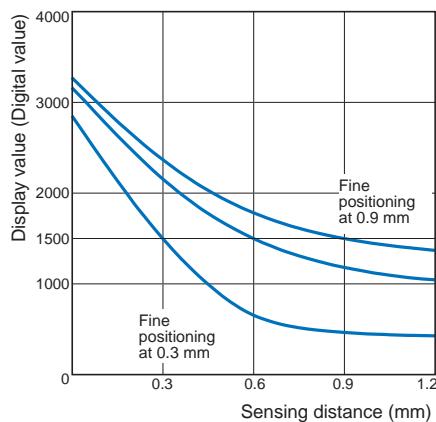


E2C-ED01(-□)

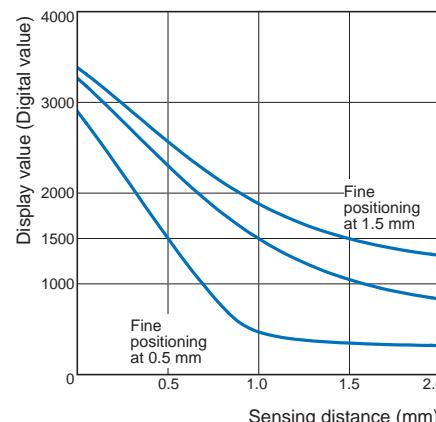


E2C-ED02(-□)/EM02(-□)

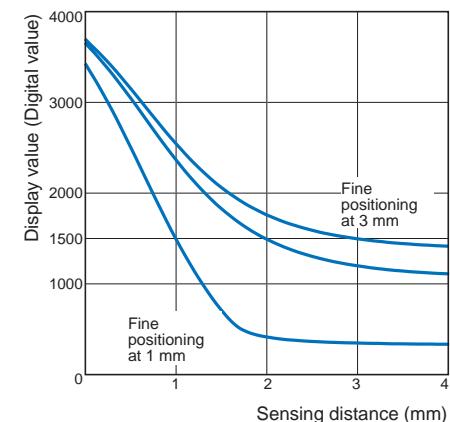


E2C-EM07(-□)

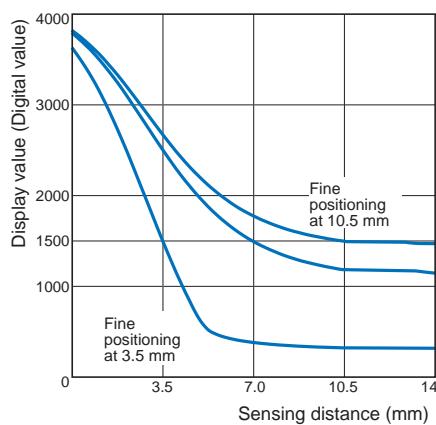

E2C-EV05(-□)

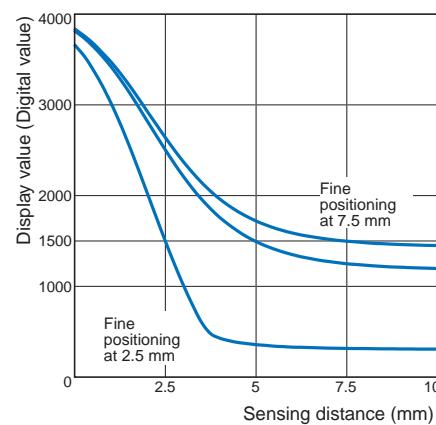


E2C-EM02H

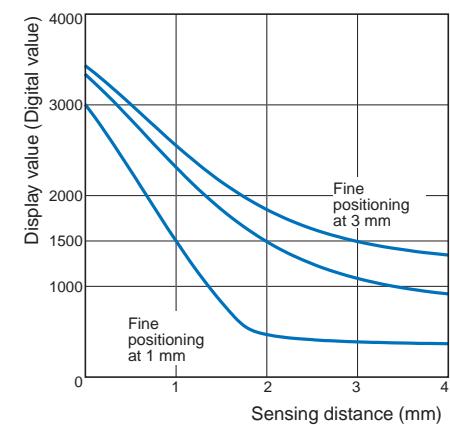


### Influence of Sensing Object Size and Material


E2C-EDR6-F

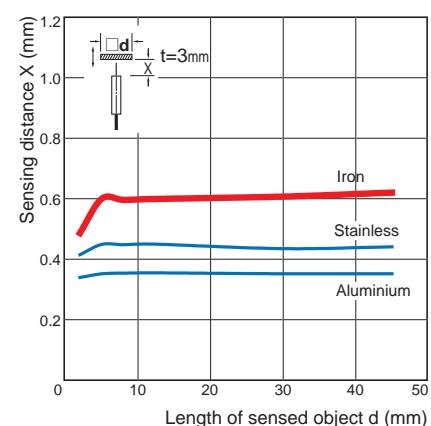


E2C-ED01(-□)

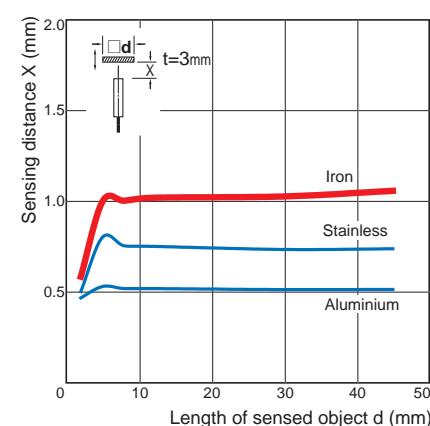


E2C-ED02(-□)/EM02(-□)

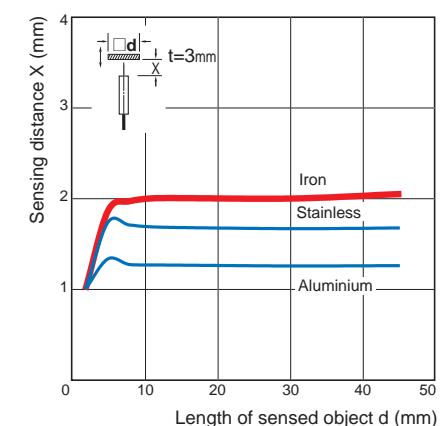


E2C-EM07(-□)

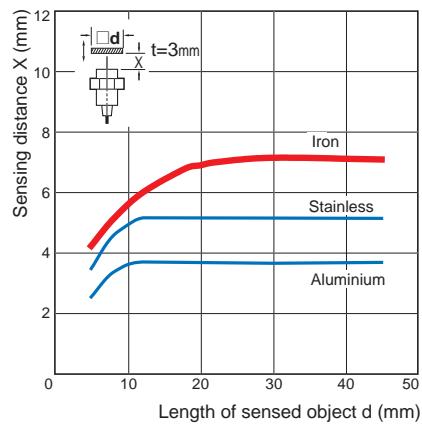

E2C-EV05(-□)

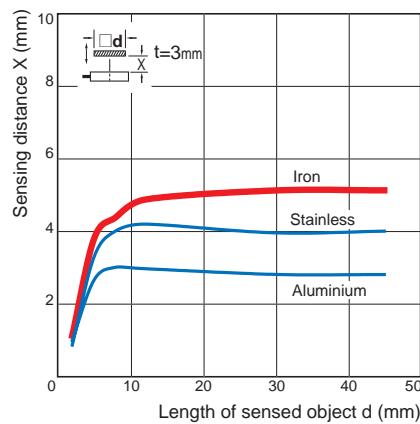


E2C-EM02H

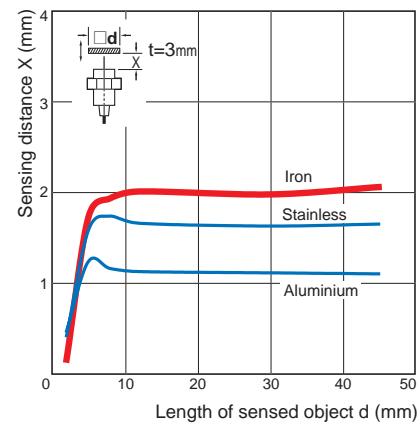


### Influence of Sensor Head Temperature


E2C-EDR6-F

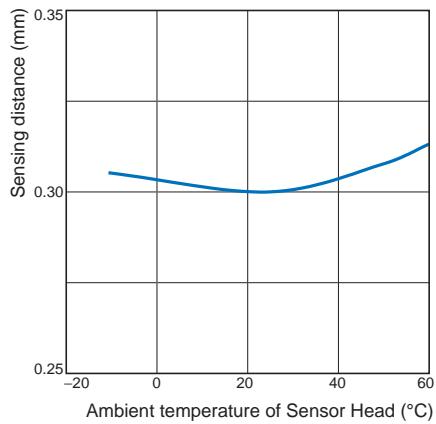


E2C-ED01(-□)

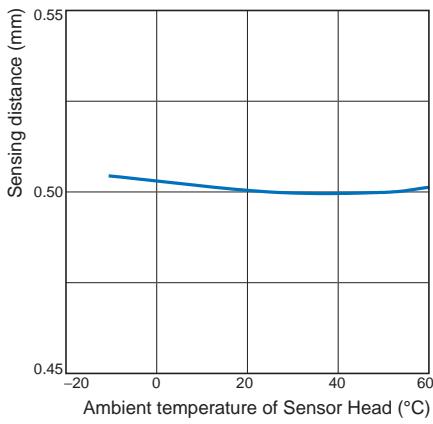


E2C-ED02(-□)/EM02(-□)

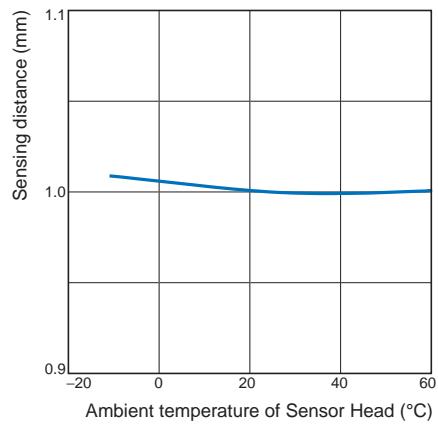


E2C-EM07(-□)

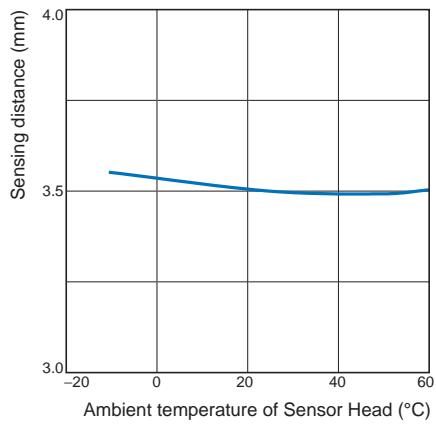

E2C-EV05(-□)

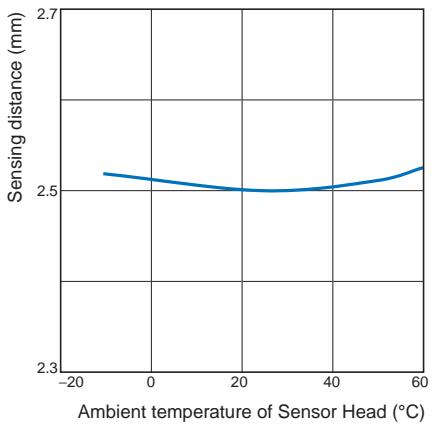

E2C-EM02H

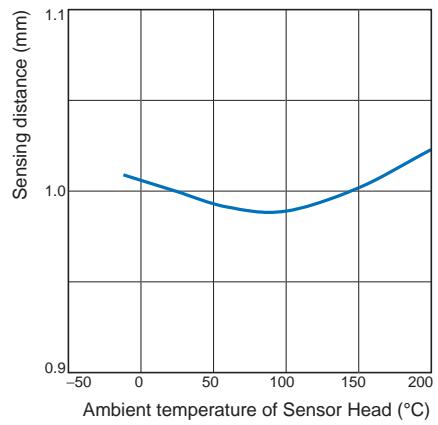

## I/O Circuit Diagrams

## NPN Output

Model	Operation mode	Timing chart	Mode selector	Output circuit
E2C-EDA11 E2C-EDA6	NO (Normally open)	<p>Sensing object Yes No</p> <p>Operation indicator (orange) Lit Not lit</p> <p>Output transistor ON OFF</p> <p>Load (relay, etc.) Operate Reset (Between brown and black lines)</p>	NO	
	NC (Normally closed)	<p>Sensing object Yes No</p> <p>Operation indicator (orange) Lit Not lit</p> <p>Output transistor ON OFF</p> <p>Load (relay, etc.) Operate Reset (Between brown and black lines)</p>	NC	
E2C-EDA21 E2C-EDA7	NO (Normally open)	<p>Sensing object Yes No</p> <p>Operation indicator (orange) Lit Not lit</p> <p>Output transistor ON OFF</p> <p>Load (relay, etc.) Operate Reset (Between brown and black lines)</p>	NO	
	NC (Normally closed)	<p>Sensing object Yes No</p> <p>Operation indicator (orange) Lit Not lit</p> <p>Output transistor ON OFF</p> <p>Load (relay, etc.) Operate Reset (Between brown and black lines)</p>	NC	

## Note: 1. Setting Areas for Twin-output Models

Normally open: ....ON between the thresholds for Channel 1 and Channel 2

Normally closed: ..OFF between the thresholds for Channel 1 and Channel 2

## 2. Timing Charts for Timer Settings (T: Set Time)

ON delay	OFF delay	One shot

## PNP Output

Model	Operation mode	Timing chart	Mode selector	Output circuit
E2C-EDA41 E2C-EDA8	NO (Normally open)	<p>Sensing object Yes</p> <p>Operation indicator (orange) Lit</p> <p>Output transistor ON</p> <p>Load Operate (relay, etc.) Reset (Between blue and black lines)</p>	NO	
	NC (Normally closed)	<p>Sensing object Yes</p> <p>Operation indicator (orange) Not lit</p> <p>Output transistor ON</p> <p>Load Operate (relay, etc.) Reset (Between blue and black lines)</p>	NC	
E2C-EDA51 E2C-EDA9	NO (Normally open)	<p>Sensing object Yes</p> <p>Operation indicator (orange) Lit</p> <p>Output transistor ON</p> <p>Load Operate (relay, etc.) Reset (Between blue and black lines)</p>	NO	
	NC (Normally closed)	<p>Sensing object Yes</p> <p>Operation indicator (orange) Not lit</p> <p>Output transistor ON</p> <p>Load Operate (relay, etc.) Reset (Between blue and black lines)</p>	NC	

## Note: 1. Setting Areas for Twin-output Models

Normally open: .... ON between the thresholds for Channel 1 and Channel 2

Normally closed: ... OFF between the thresholds for Channel 1 and Channel 2

## 2. Timing Charts for Timer Settings (T: Set Time)


ON delay	OFF delay	One shot

## Nomenclature

## Amplifier Units


## Twin-output Models

(E2C-EDA11/EDA41/EDA6/EDA8/EDA0)

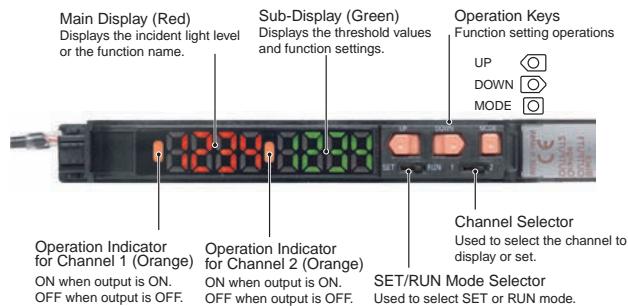

## External-input Models

(E2C-EDA21/EDA51/EDA7/EDA9)

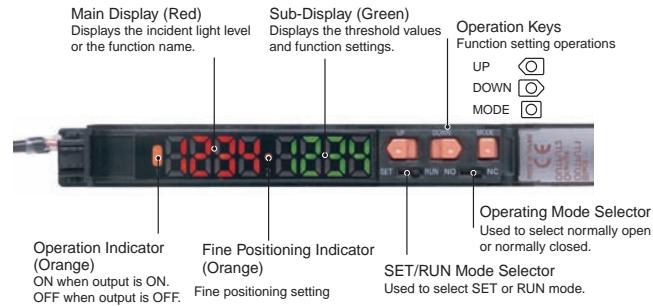

# Safety Precautions

Refer to **Warranty and Limitations of Liability**.

## WARNING

Do not use this product in any safety device used for the protection of human lives.



## Precautions for Correct Use

Do not use this product in operating atmospheres or environments outside the specified ratings.

## Amplifier Units

### Design

#### Power ON

The Sensor is ready to sense an object within 200 ms after turning the power ON. If the load and Sensor are connected to different power supplies, always turn ON the Sensor power first.


#### Cable

Use an external power cable of cross-section of 0.3 mm<sup>2</sup> or more for the Amplifier, and the total length of the cable must be 30 m or less.


## Connecting Sensor Heads

### Connecting and Disconnecting Sensor Heads

1. Open the protective cover.
2. Making sure that the lock button is up, insert the fibers all the way to the back of the Connector insertion opening.

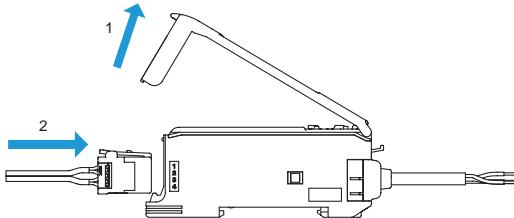


To disconnect the Sensor Head, pull out the fibers while pressing on the lock button.




## Connecting and Disconnecting Wire-saving Connectors

### <Connecting Connectors>

1. Insert the Master or Slave Connector into the Amplifier Unit until it clicks into place.

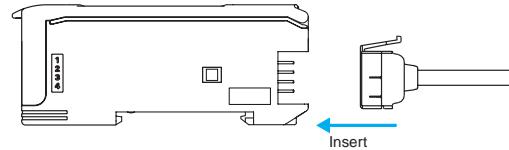


2. Apply the supplied seal to the non-connection surface of the Master/Slave Connector.



**Note:** Apply the seal to the grooved side.

### <Disconnecting Connectors>


1. Slide the Slave Amplifier Unit.
2. After the Amplifier Unit has been separated, press down on the lever on the Connector and remove it. (Do not attempt to remove Connectors without separating them from other Amplifier Units first.)

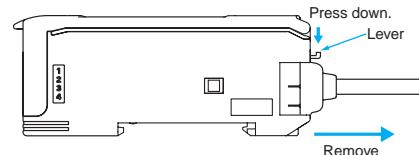


## Installing and Removing Amplifier Units

### <Installing Amplifier Units>

1. Install the Units one by one to the DIN rail.

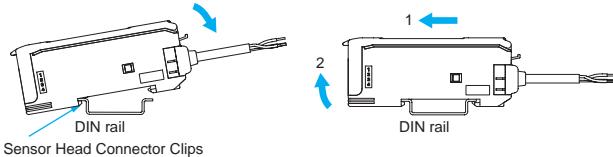

2. Slide one Unit toward the other, match the clips at the front ends, and then bring them together until they "click."

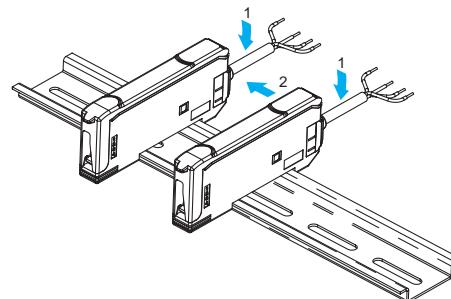

### <Removing Amplifier Units>


Slide one Unit away from the other and remove them one by one. (Do not remove the connected Units together from the DIN rail.)

**Note:**

1. When the Amplifier Units are connected to each other, the operable ambient temperature changes depending on the number of connected Amplifier Units. Check page 5 in *Rating and Specifications*.
2. Before connecting or disconnecting the Units, always switch power OFF.


### End Plate Mounting (PFP-M)

Mount End Plates on Amplifier Units to avoid movement due to vibration. When a Mobile Console is installed, mount the End Plate facing as shown in the following diagram.



### Mounting a Communications Head for the Mobile Console

Leave a space of at least 20 mm on the left side of the Units for a Mobile Console Communications Head.



### EEPROM Write Error

If the data is not written to the EEPROM correctly due to a power failure or static-electric noise, initialize the settings using the keys on the Amplifier Unit.

### Optical Communications

When using more than one Amplifier Unit, mount the Units side-by-side. Do not slide or remove Units while they are in use.

### Miscellaneous

#### Protective Cover

Be sure to put on the Protective Cover before use.

#### Mobile Console

Use the E3X-MC11-SV2 Mobile Console for E2C-EDA-series Amplifier Units. Other Mobile Consoles, such as the E3X-MC11, cannot be used.

#### Sensor Head and Amplifier Unit Connection

Be sure to use only specified Sensor Head and Amplifier Unit combinations. The E3C-LDA-series Photoelectric Sensor with Separate Digital Amplifier is not compatible, and the E2C-EDA must not be used with products from that series.

#### Warm-up

The digital display will slowly change until the circuits stabilize after the power is turned ON. It takes about 30 minutes after the power is turned ON before the E2C-EDA is ready to sense.

#### Maintenance Inspection

- Be sure to turn OFF the power before adjusting, connecting, or disconnecting the Sensor Head.
- Do not use thinner, benzene, acetone, or kerosene to clean the Sensor Head or Amplifier Unit.


### Sensor Heads

#### Mounting

##### Mounting Sensor Heads

- Use the dimensions from the following table to mount unthreaded cylindrical models (E2C-ED-□□). Do not tighten screws with torque exceeding 0.2 N·m when mounting Sensor Heads.

Model	Tightening range A
E2C-EDR6-F	9 to 18 mm
E2C-ED01□□	9 to 18 mm
E2C-ED02□□	11 to 12 mm



- Use the torque given in the following table to tighten threaded cylindrical models (E2C-EM□□).

Model	Tightening torque
E2C-EM02□□	15 N·m max.
E2C-EM07M□□	15 N·m max.
E2C-EM02H□□	5.9 N·m max.

- Do not use torque exceeding 0.5 N·m to tighten screws when mounting flat models (E2C-EV□□).
- Use a bending radius of at least 8 mm for the Sensor Head cable.
- Use only the special extension cable to extend the cable between the Sensor Head and the Amplifier Unit.


Model	Cable length
E22-XC2R	2 m
E22-XC7R	7 m

#### Effects of Surrounding Metal

- Provide a minimum distance between the Sensor and the surrounding metal as shown in the table below.


#### Effects of Surrounding Metal (Units: mm)

Model	Counterbore A	Protrusion B
E2C-EDR6-F	3.1	0
E2C-ED01□□	5.4	0
E2C-ED02□□	8	0
E2C-EM02□□	10	0
E2C-EM07M□□	35	20
E2C-EV05□□	14 × 30	4.8
E2C-EM02H□□	12	0



#### Mutual Interference

- If more than one Sensor Head is installed face to face or in parallel, make sure that the distances between two Units adjacent to each other are the same as or larger than the corresponding values shown in the following table.
- The distance between Sensor Heads may be narrower than specified with these Sensors because the Mutual Interference Prevention Function is used for optical communications between the Amplifier Units.











#### Mutual Interference


(Units: mm)

Model	Face-to-face arrangement A	Parallel arrangement B	Face-to-face arrangement using the Mutual Interference Prevention Function A'	Parallel arrangement using the Mutual Interference Prevention Function B'
E2C-EDR6-F	14	10	3.5	3.1
E2C-ED01□□	45	20	9	5.4
E2C-ED02□□	35	30	21	8 *
E2C-EM02□□	36	30	21	10 *
E2C-EM07M□□	140	120	35	18 *
E2C-EV05□□	65	30	21	14 *
E2C-EM02H□□	45	30	21	12 *


\* Mutual interference does not occur for close-proximity mounting when the Mutual Interference Prevention Function is effective.

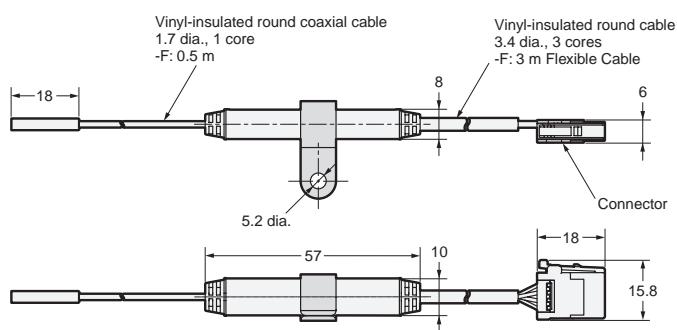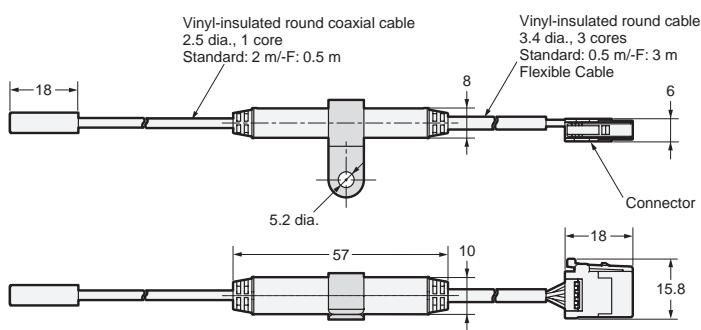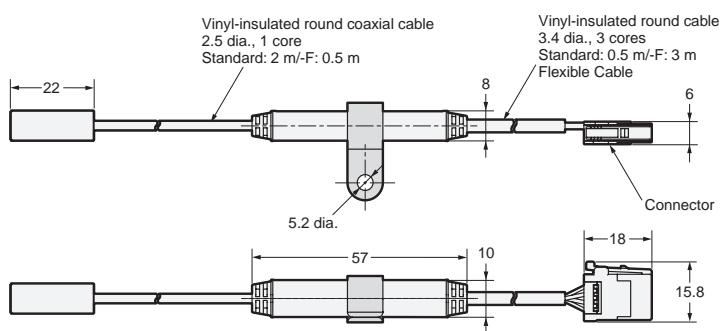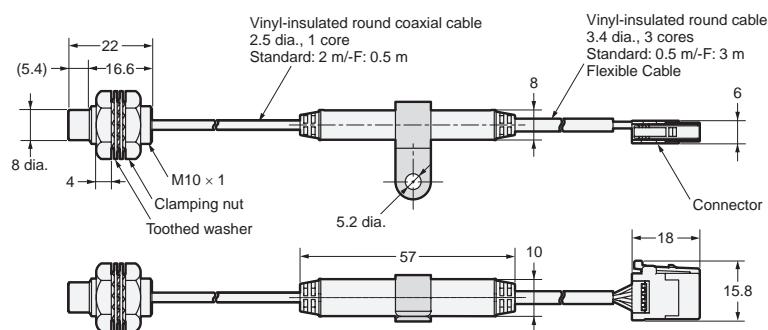**Dimensions****Sensor Heads****E2C-EDR6-F****E2C-ED01(-F)****E2C-ED02(-F)****E2C-EM02(-F)**


## E2C-EM07M(-F)

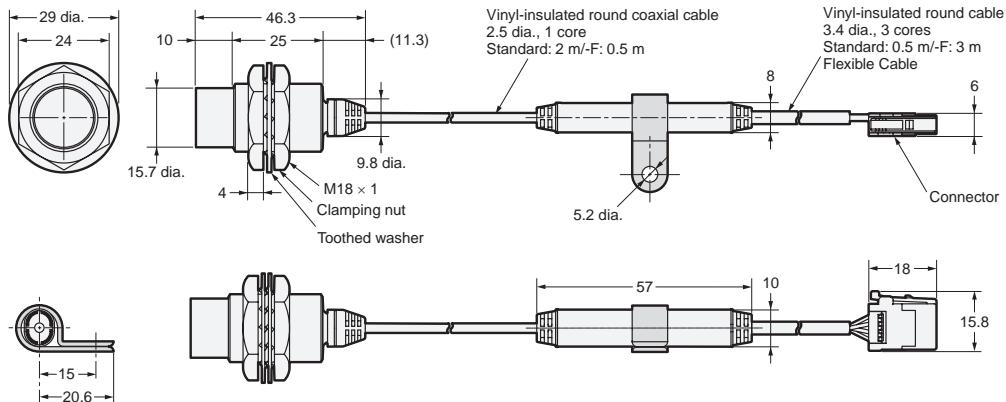


## E2C-EV05(-F)

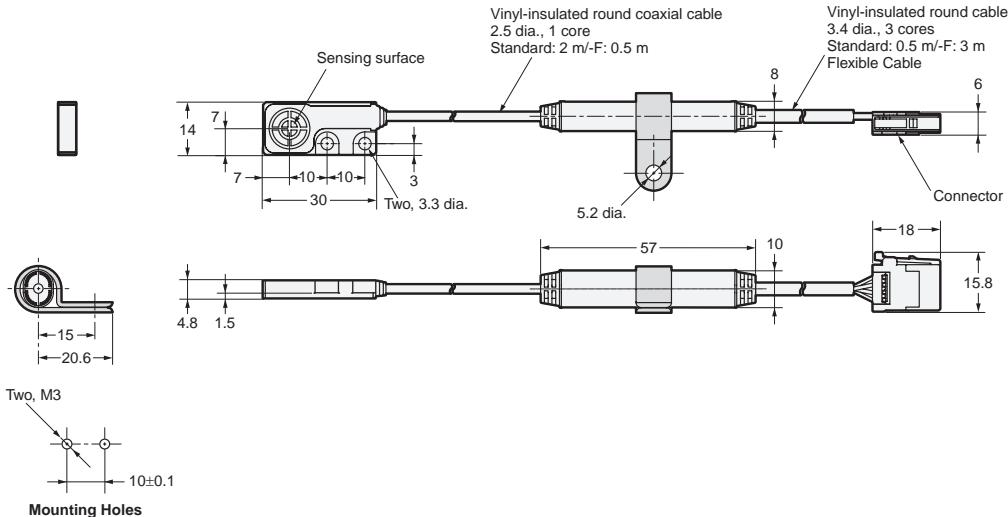

## E2C-EM02H

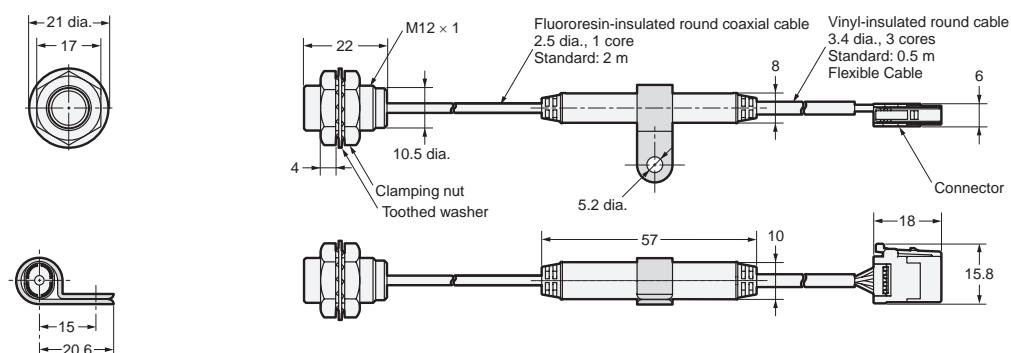

## Extension Cables for Sensors Head

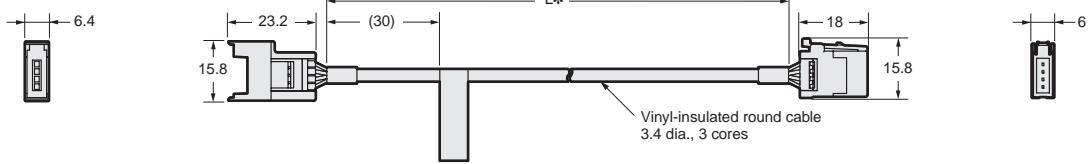E22-XC2R  
E22-XC7R




## \* Cable Specifications

Specifications	L
2 m	2,000 <sup>+50</sup> <sub>0</sub>
7 m	7,000 <sup>+200</sup> <sub>0</sub>




## Amplifier Units

### Amplifier Units with Cables

E2C-EDA11  
E2C-EDA21  
E2C-EDA41  
E2C-EDA51

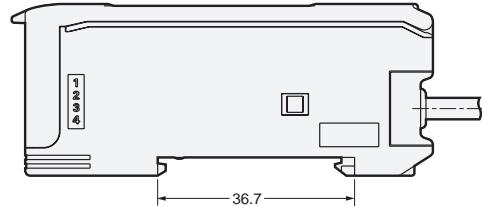
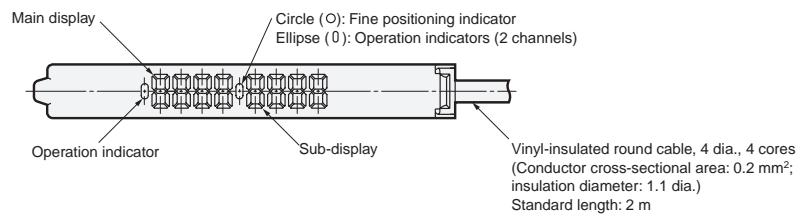


**With Mounting Bracket Attached**

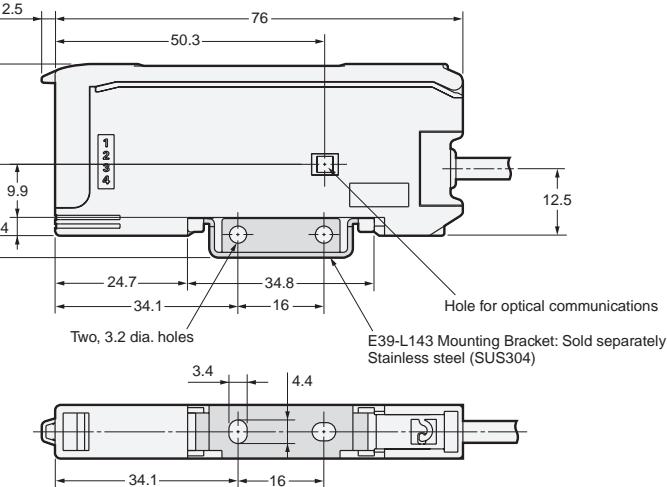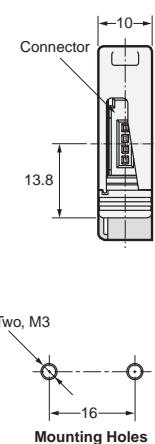
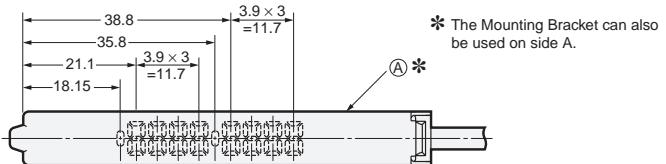


## Amplifier Units with Wire-saving Connectors


E2C-EDA6  
E2C-EDA7  
E2C-EDA8  
E2C-EDA9

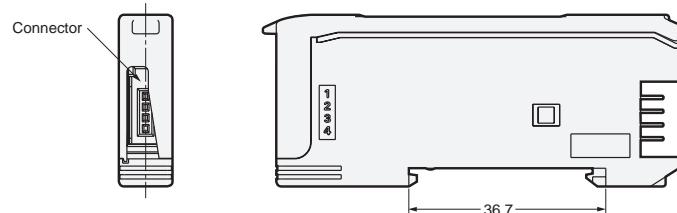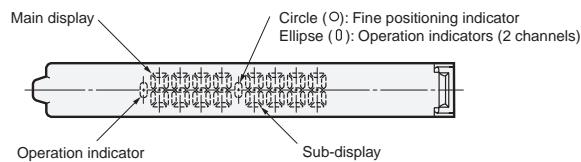

### With Mounting Bracket Attached

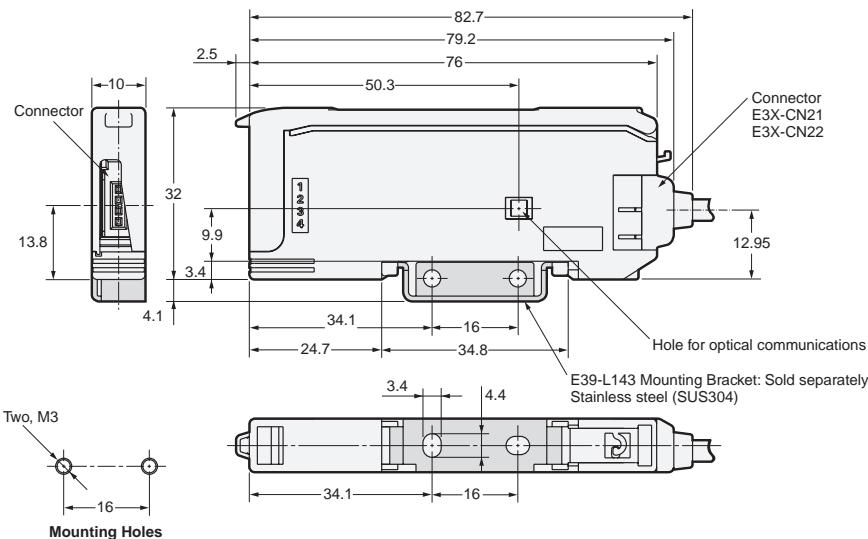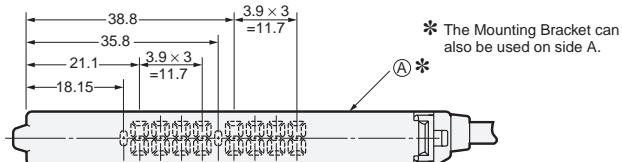

**Amplifier Unit with Connector for  
Sensor Communications Unit**  
E2C-EDA0

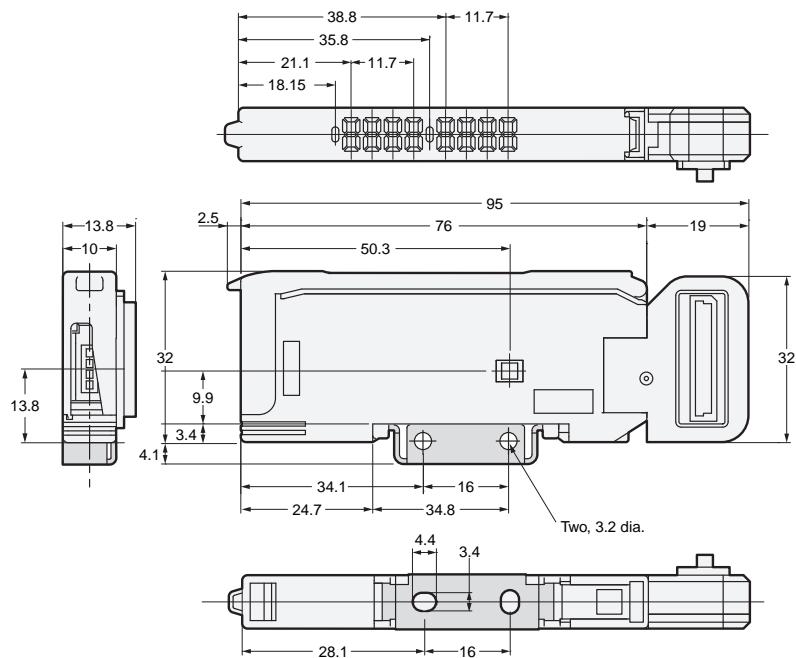

**Amplifier Unit Connectors**

Refer to *E3X-DA-S/MDA* for details.

**Mobile Console**

Refer to *E3X-DA-S/MDA* for details.

**Accessories (Order Separately)**

**Mounting Brackets**

Refer to *E39-L* for details.

**End Plate**

Refer to *DIN rail* for details.

## Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## Warranty and Limitations of Liability

### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## Application Considerations

### SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

## Disclaimers

### CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

### DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

### PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

### ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2013.2

In the interest of product improvement, specifications are subject to change without notice.

**OMRON Corporation**  
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2013 All Right Reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron](#):

[E2C-ED02-F](#) [E2C-EDA21 2M](#) [E2C-EDA11 2M](#) [E2C-ED01](#) [E2C-ED01-F](#) [E2C-EDA41 2M](#) [E2C-EDR6-F](#)