HIGH DENSITY MEZZANINE SOLUTIONS

HIGH DENSITY MEZZANINE SOLUTIONS

- Web links to product info including performance parameters, drawings, 3D models, etc
 - www.fci.com/mezzselect
 - www.fci.com/conan
 - www.fci.com/bergstak
 - www.fci.com/boardandwire
- Documentation
 - Conan® data sheet
 - BergStak® data sheet
 - Conan® demo kit

Documentation available at

www.fci.com

www.fci.com/mezzselect

www.fci.com/conan

www.fci.com/bergstak

www.fci.com/boardandwire

CONAN[®] CONNECTOR SYSTEM 1.0MM PITCH (4.15MM TO 7MM STACK HEIGHTS)

- Board to Board
- Flex Cable to Board
- Perfect for Portable, Hand-held and Mobile Electronics
- Communications
- Medical Diagnostic and Instrumentation
- Motor Vehicle and Industrial



BERGSTAK[®] CONNECTOR SYSTEM 0.8MM PITCH (5MM TO 16MM STACK HEIGHTS)

- Board to Board
- Flex cable to board
- Servers, Storage, Switching and Transmission
- Communications
- Medical Diagnostic and Instrumentation





FCI



www.fci.com/mezzselect

CONAN® CONNECTOR SYSTEM 1.0MM PITCH

- ▶ More options in a tight range for portable electronics:
 - 5 stack heights: 4.15mm to 7.0mm
 - 9 sizes: 9 to 69 positions
- "Click" engagement assures secure mating.
- Blade-on-beam contacts allow "peeling" and prevent stubbing."
- Mating face lead-in eases mating
- SMT hold-downs for increased attachment strength
- Mating polarization prevents backward connections
- PCB polarization prevents manufacturing positioning errors
- Tape and reel packaging supports low cost, automated assembly


BERGSTAK® CONNECTOR SYSTEM 0.8MM PITCH

- Vast range of sizes and stack heights suits many design schemes
 - 12 stack heights: 5mm to 16mm in 1mm increments
 - 9 sizes: 40 to 200 positions in 20 position increments
- ▶ Intermates with similar competitive connectors
- Optimized "blade-on-beam" mating maximizes connection integrity
 - Connector polarization, generous lead-in angles and precise contact positioning ensure precise mating alignment and reliability
 - Controlled-radius plug contacts minimize contact wear and prevent contact stubbing
- Choice of gold-based and palladium-based platings provide protection in different environments and applications
- Tape and Reel packaging supports high speed automated assembly



www.fci.com/mezzselect



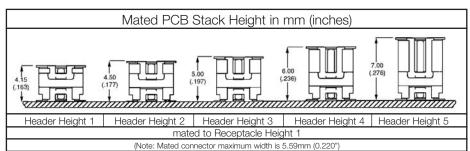

PLUGS 61083-XX2XXXXX 61083-XX1 XXXXX 61083-XX3XXXXX 61083-XX4XXXXX 5.70 mm 6.70 mm (0.264 in.) 7.70 mm 4.70 mm (0.185 in. (0.224 in.) (0 303 in 61082-XX1 XXXXX 5.00 mm 3.70 mm (0.197 in. (0.146 in.) 6.00 mm (0.236 in. ES 61082-XX2XXXX RECEPTACL HEIGHTS 10.00 mm (0.394 in.) 12.00 mm (0.472 in.) 11.00 mm (0.433 in.) 7.70 mn 0.303 in.) 61082-XX3XXXXX 13.00 mm (0.512 in.) 14.00 mm (0.551 in.) 15.00 mm (0.591 in.) 16.00 mm (0.630 in.) 11.70 (0.461 in.) STACK

