



**CRYSTEK**  
**MICROWAVE**  
 A DIVISION OF CRYSTEK CORPORATION

**ARMORED 18 GHZ  
 LOW LOSS RF COAX  
 CABLE ASSEMBLIES  
 WITH STAINLESS STEEL  
 CONNECTORS**



**Armored 50 Ohm 18 GHz Low Loss Coaxial Cables**

**Features:**

- Strain Relief:** Heavy duty adhesive strain relief with Neoprene jacket
- Center Conductor:** SPCCS (Silver-Plated Copper Solid)
- First Shield:** Silver-plated flat braid
- Second Shield:** High temp. aluminum polyimide foil
- Third Shield:** Round silver-plated copper braid
- Dielectric:** Expanded PTFE (Polytetrafluoroethylene)
- Cable Jacket:** ETFE (Ethylene Tetrafluoroethylene Copolymer)
- Connectors:** SST, corrosion-resistant 303 stainless steel per ASTM-A582 (Passivated finish per SAE-AMS-2700)
- Center Pin:** GPBC (Gold-Plated Beryllium Copper)
- Armor Outer Diameter:** 0.355" (9.02mm) Max
- Armor:** Type 302 Stainless Steel, Fully Interlocking
- Operating Temperature:** -40°C to +85°C
- Minimum Bend Radius:** 1.5"
- Crush Resistance:** Compress OD by 0.003" 1930 lbs. using 3" plate

**Electrical Specifications:**


- Impedance:** 50 Ohms
- Frequency:** Up to 18 GHz
- Insertion Loss:** <0.41 dB/ft Typ at 18 GHz
- VSWR: (SMA)** <1.30 to 18 GHz
- (N-Type)** <1.35 to 18 GHz
- Nominal Capacitance:** 27 pF/ft
- Velocity of Propagation:** 78%
- Shield Effectiveness:** Greater than 90 dB
- Attenuation (dB/ft):** 0.05 Typical at 400 MHz  
 0.08 Typical at 1 GHz  
 0.11 Typical at 2 GHz  
 0.14 Typical at 3 GHz  
 0.21 Typical at 6 GHz  
 0.32 Typical at 12 GHz  
 0.41 Typical at 18 GHz
- Max Power in (Watts):** 2800 @ 500 MHz  
 1960 @ 1 GHz  
 1100 @ 3 GHz  
 760 @ 6 GHz  
 520 @ 12 GHz  
 370 @ 18 GHz

\*as specified at 25°C

*Custom Lengths Available*

**Available Connector Terminations:**

- SMA Male
- TNC Male

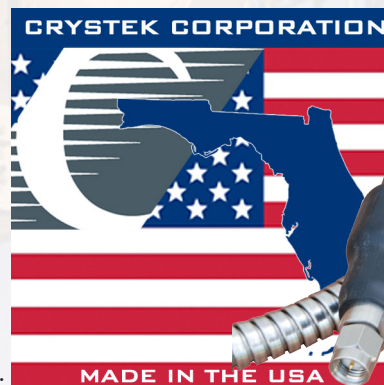

**Connector Corrosion (salt spray):**

MIL-STD-202, method 101, test cond. B 5% salt solution.

**Connector Durability:**

500 connections Minimum

**SMA / SMA [Straight/Straight]**

Note\*\* Cable is weather resistant with continuous neoprene jacket cover over armor.

Part Number	Description	Length
CCASMA-MM-LL142-24	Armored LL142 Low Loss Coax Cable, SMA Male/Male	24"
CCASMA-MM-LL142-36	Armored LL142 Low Loss Coax Cable, SMA Male/Male	36"
CCASMA-MM-LL142-48	Armored LL142 Low Loss Coax Cable, SMA Male/Male	48"
CCASMA-MM-LL142-60	Armored LL142 Low Loss Coax Cable, SMA Male/Male	60"





**CRYSTEK**  
 CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
 PHONE: 239-561-3311 • 800-237-3061 Rev.: D  
 FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 08-02-22



**CRYSTEK**  
**MICROWAVE**  
A DIVISION OF CRYSTEK CORPORATION

**ARMORED 18 GHZ  
LOW LOSS RF COAX  
CABLE ASSEMBLIES  
WITH STAINLESS STEEL  
CONNECTORS**

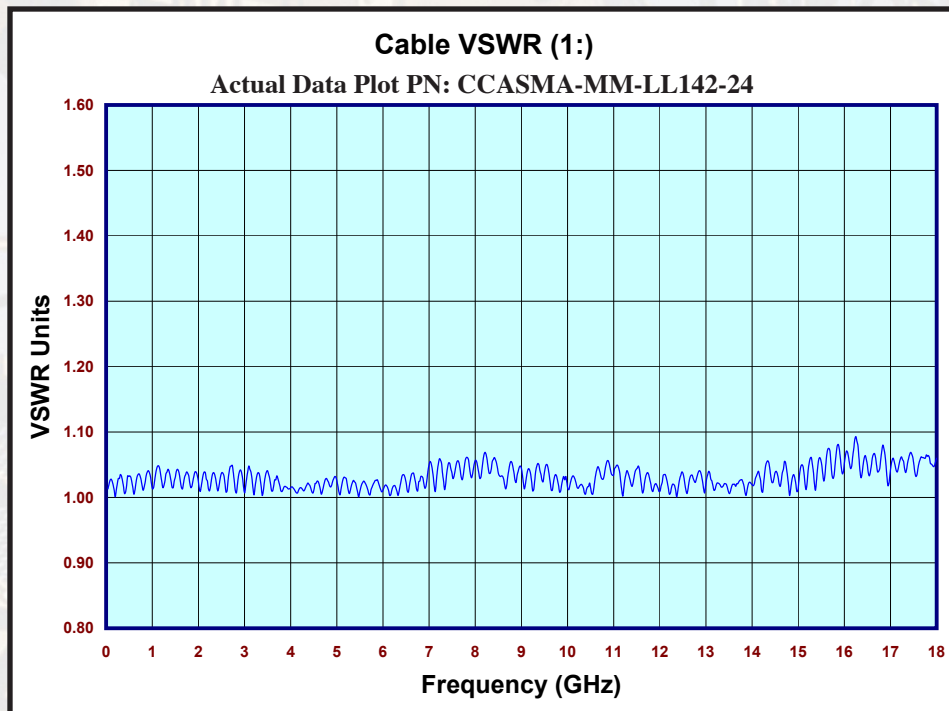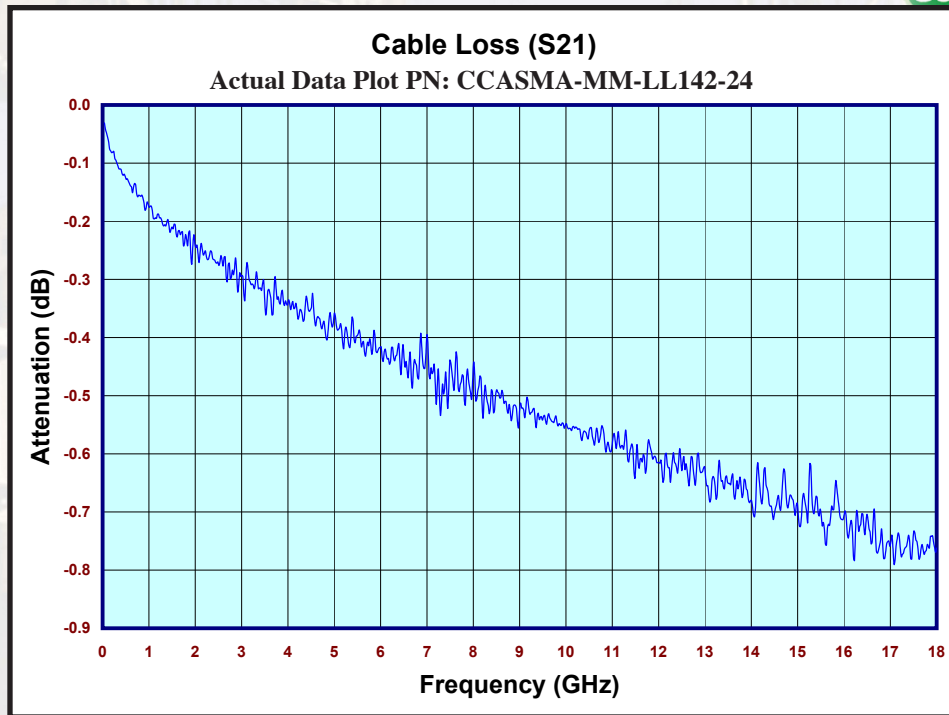

**CRYSTEK**  
CORPORATION



12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
PHONE: 239-561-3311 • 800-237-3061 Rev.: D  
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 08-02-22





**CRYSTEK**  
**MICROWAVE**  
A DIVISION OF CRYSTEK CORPORATION

**ARMORED 18 GHZ  
LOW LOSS RF COAX  
CABLE ASSEMBLIES  
WITH STAINLESS STEEL  
CONNECTORS**

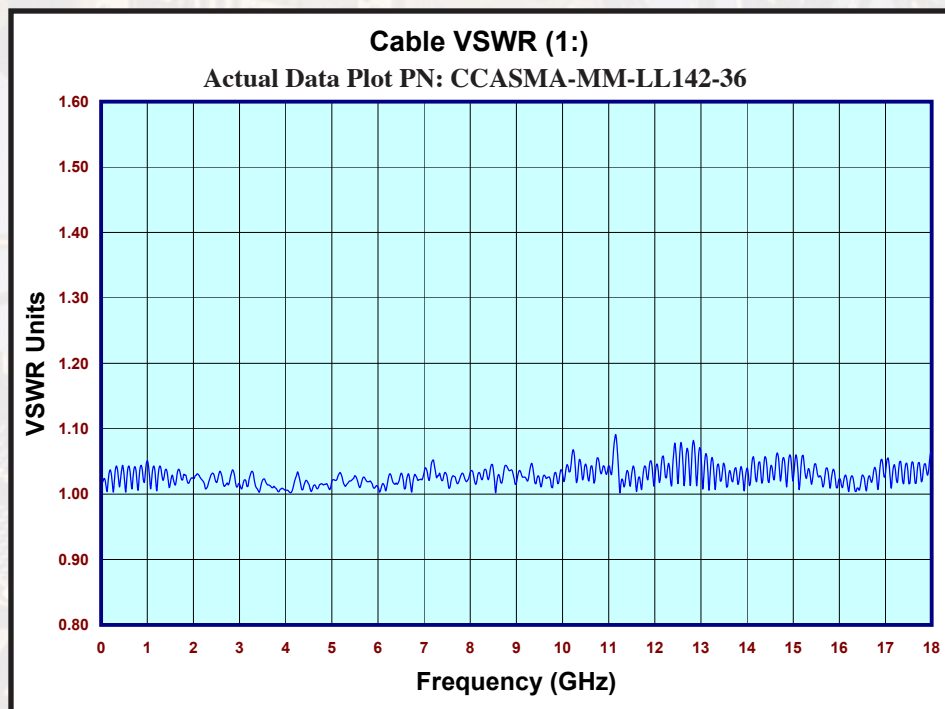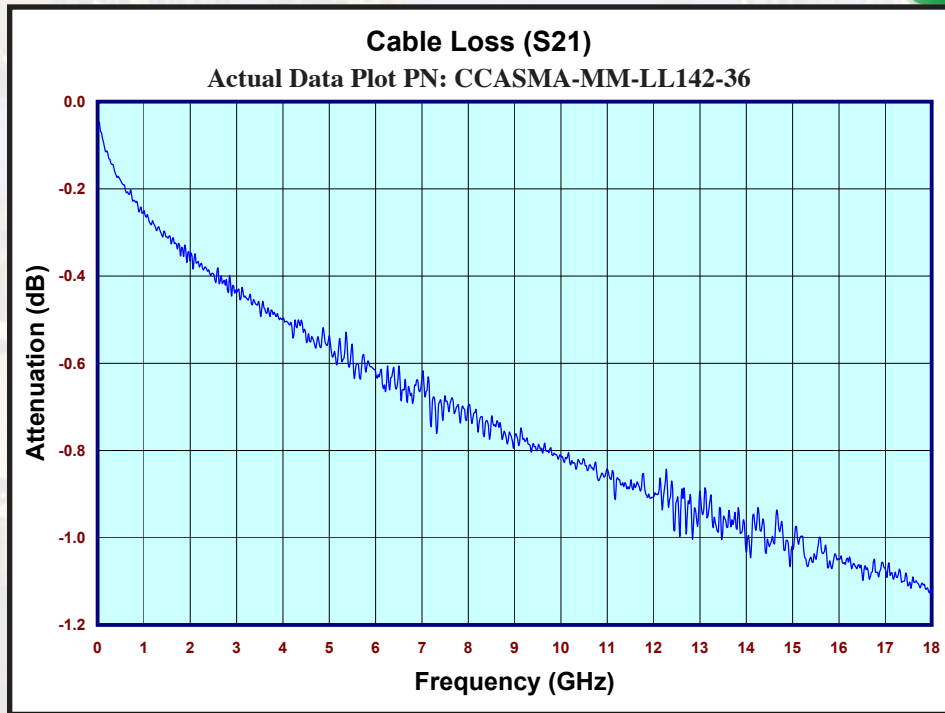



**CRYSTEK**  
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
PHONE: 239-561-3311 • 800-237-3061 Rev.: D  
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 08-02-22



**CRYSTEK**  
**MICROWAVE**  
A DIVISION OF CRYSTEK CORPORATION

**ARMORED 18 GHZ  
LOW LOSS RF COAX  
CABLE ASSEMBLIES  
WITH STAINLESS STEEL  
CONNECTORS**

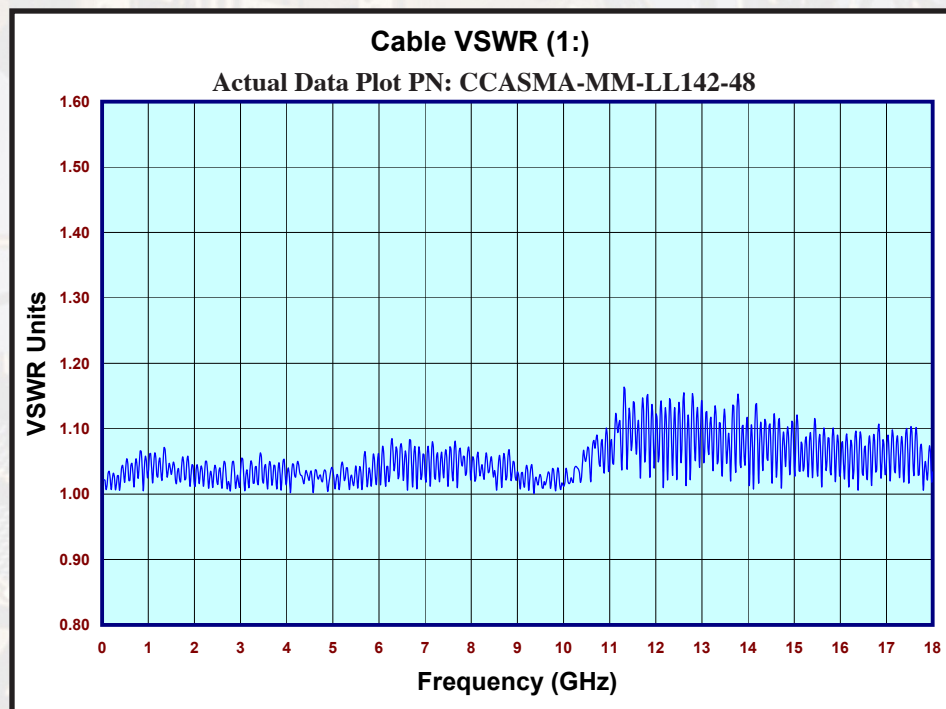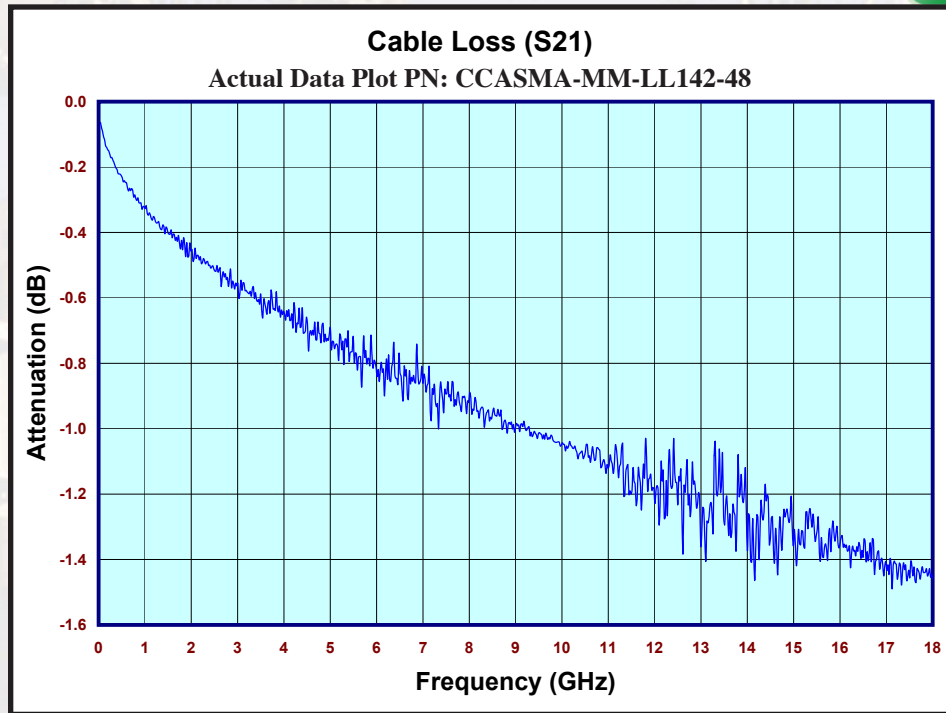

**CRYSTEK**  
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
PHONE: 239-561-3311 • 800-237-3061 Rev.: D  
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 08-02-22