




Pushing Performance

# HARTING Han-Fast<sup>®</sup> Lock Info

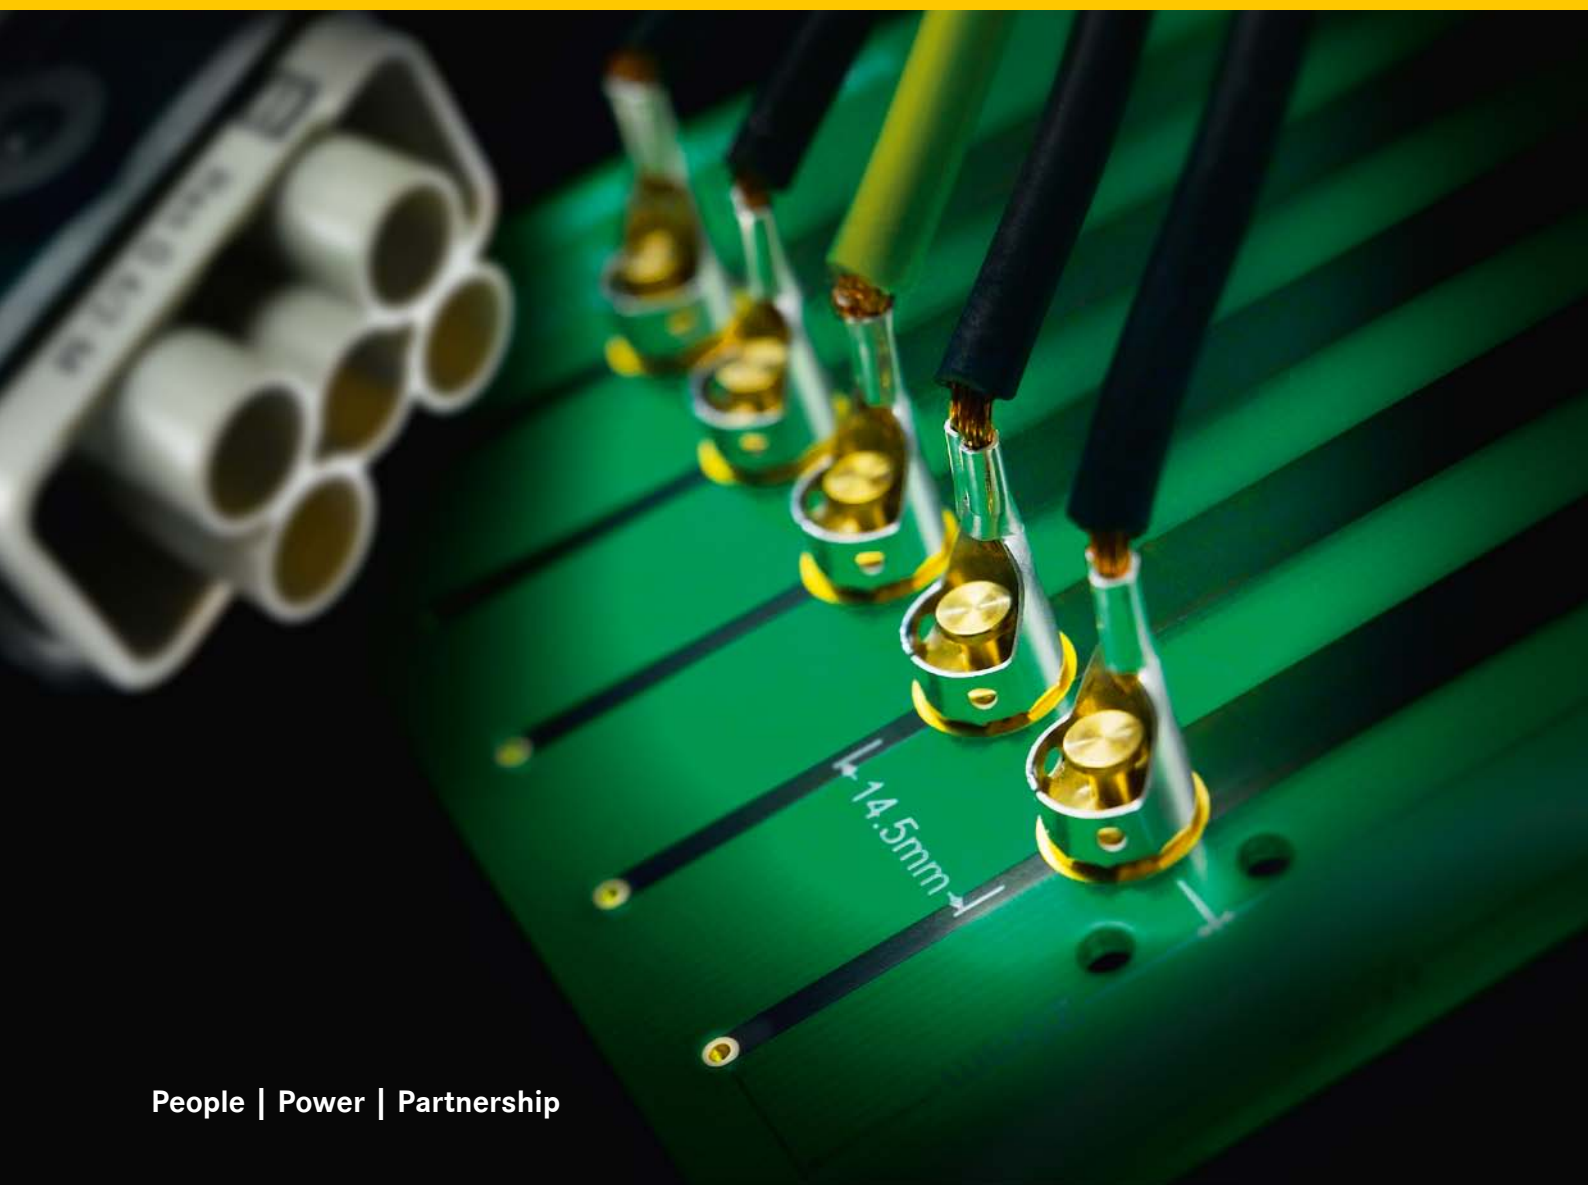


# Han-Fast® Lock flexible and fast

+ for different  
Han® inserts

+ 4.0 up to 10.0 mm<sup>2</sup>  
wiregauge

+ solder free PCB connector

# Han-Fast<sup>®</sup> Lock your benefits

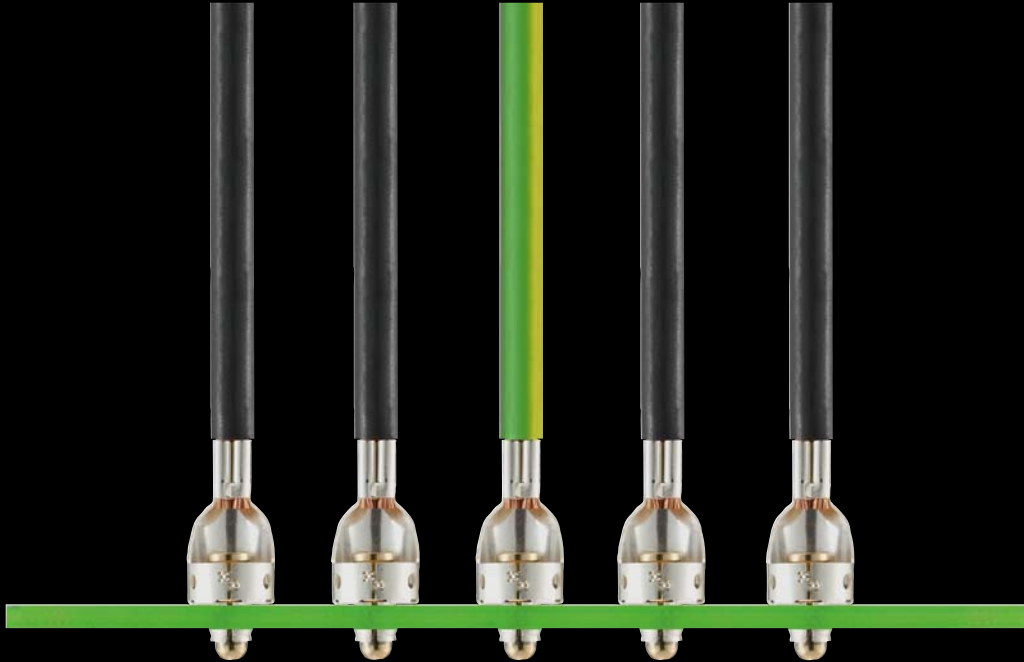

solder free  
PCB connector

flexible

fast


easy

position independent  
of the connector

current  
up to 60 A

standard hole with  
contact pad

# Han-Fast<sup>®</sup> Lock contact principle

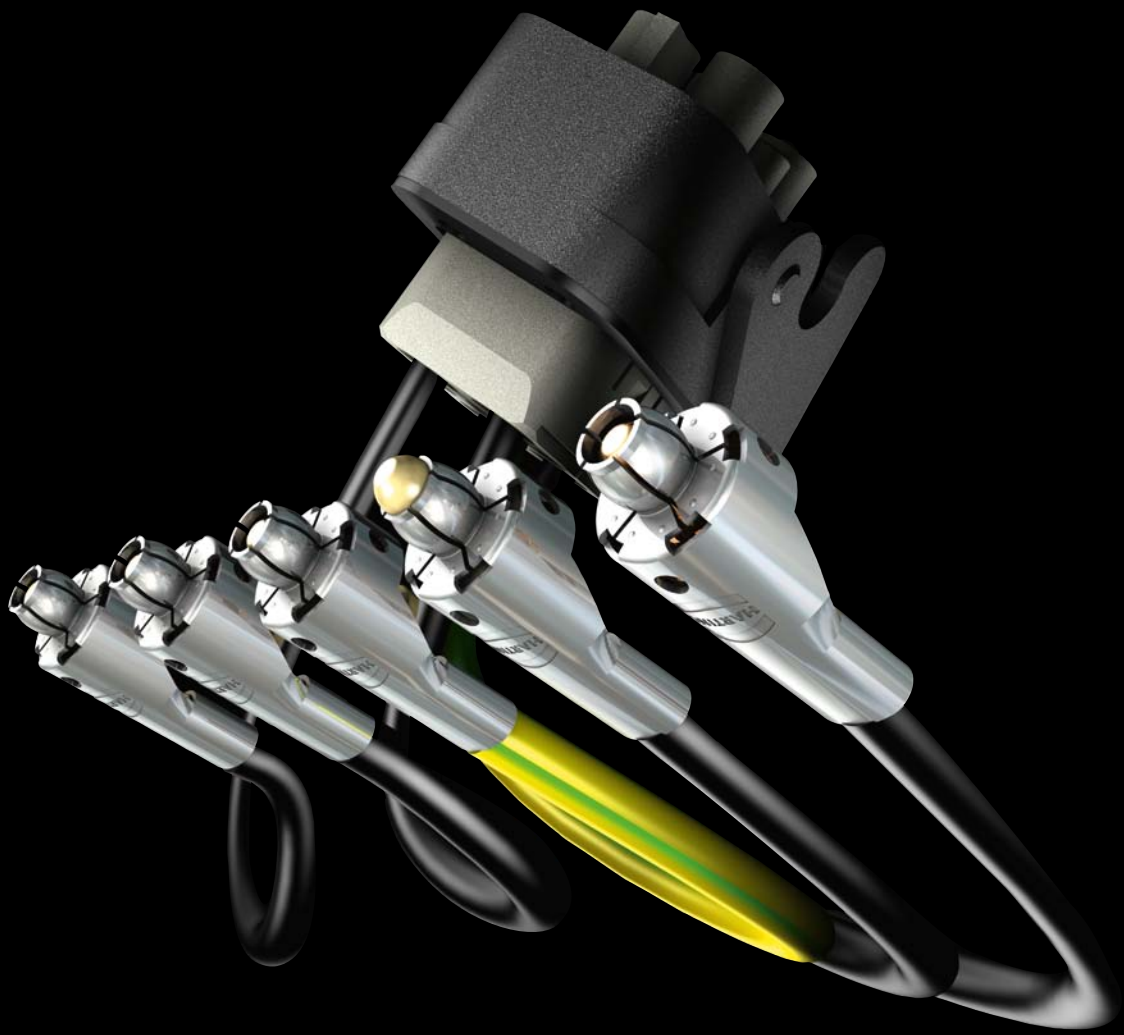

# Han-Fast<sup>®</sup> Lock application example



## Building precise relationships

Compact and highly efficient solutions are called for in markets such as renewable energy, transportation, robots and automation, where applications are characterized by rough environments and therefore high protection classes.

PCBs must be quickly and reliably connected to Han<sup>®</sup> industrial connectors. This process is flexible, convenient, simple and possible without additional components thanks to Han-Fast<sup>®</sup> Lock.



**Pushing Performance**

[www.HARITING.com](http://www.HARITING.com)