

Single Port MagJack®

Harmonica MagJack®

Stacked MagJack®

USB Combo MagJack®

Compressor MagJack®





**COMPONENTS FOR A
CONNECTED
PLANET®**

MagJack® Product Guide

Applications

- 10/100BT
- 10/100BT AutoMDIX
- 1GBT (10/100/1000BT) & 10GBT
- Power over Ethernet (PoE) & PoE Plus
- Extended temperature range of -40° to +85° C
- RoHS compliant, soldering = 260° C for 10 seconds



MagJack's combo devices provide a mix of RJ45 and USB connectors for greater design flexibility.




Markets

Networking equipment

- Hubs
- Switches
- Routers
- PCs
- Servers
- Workstations
- Motherboards

Equipment utilizing a network port


- NICs
- Servers
- PCs
- Consumer Devices

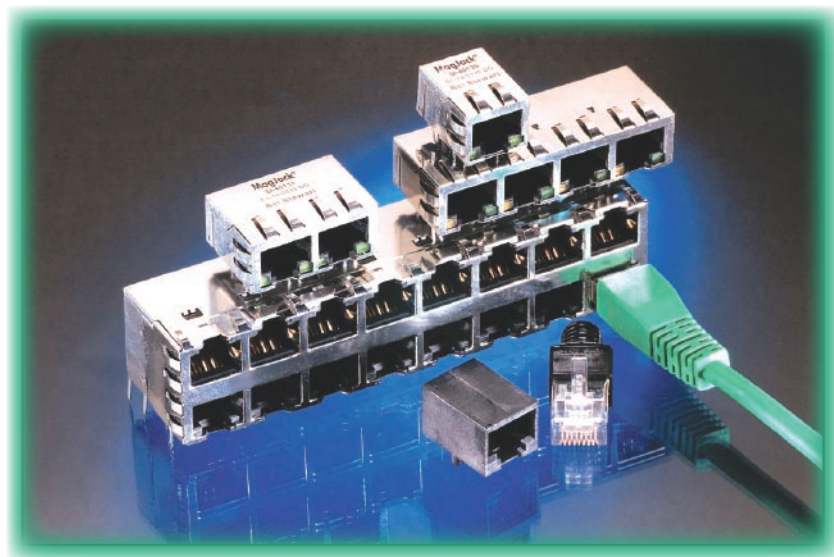


The MagJack® brand is a comprehensive portfolio of integrated devices that combine Bel's connectors and magnetics to provide the signal conditioning, EMI suppression and signal isolation previously performed by multiple (7+), discrete components. Each MagJack employed reduces PCB real estate use by more than 50% per RJ port.

Mechanical Options

Single Port Designs


- Plug tab up and plug tab down
- With or without LEDs  and bi-color
- RJ45 and USB port combinations
- Vertical mount packaging
- Low profile versions under 0.50" height
- Micro height versions under 0.45" height
- Mid-plane mount versions under 0.40" height

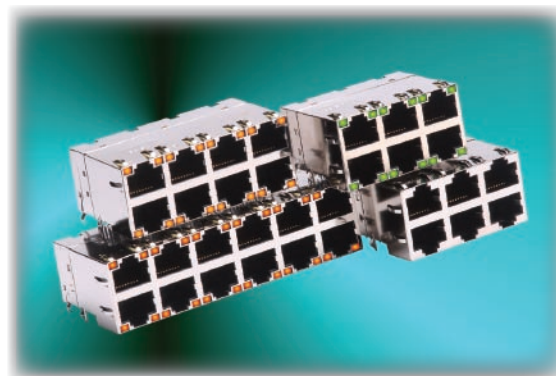

Optimized for 1U Advanced TCA rack applications, Compressor MagJack breaks the 1" height barrier with its two-tier, 0.785" (19.94mm) height package.

Multi-Port Designs

- With or without LEDs  and bi-color
- Multi-port configurations: 2x1 / 2x3 / 2x4 / 2x6 / 2x8
- Two-tier stacked designs under 0.785" height

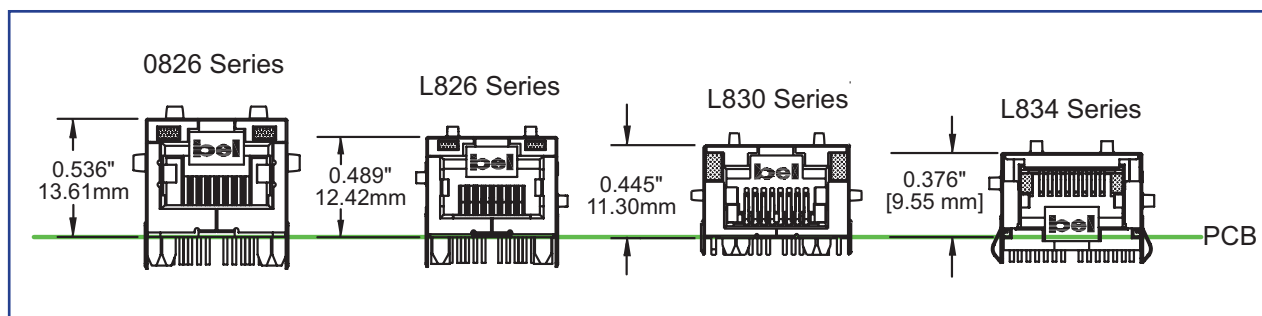


MagJack's mechanical evolution continues to provide more efficient space utilization with ultra-low profile packages and mid-plane mount versions.

Electrical Options

- IR reflow compatible, 230° C for 90 seconds
- Surge protection for GR1089 intra-building and ESD
- Extended temperature range -40° to +85° C



Vertical-mount MagJack is optimized for space-critical devices such as SBCs (single-board computers), motherboards, daughter cards, NICs (network interface cards), switches, hubs, and bridges. Applications include industrial PCs, printers, VoIP phones, remote sensor and transducer devices, security camera equipment, and wireless systems.

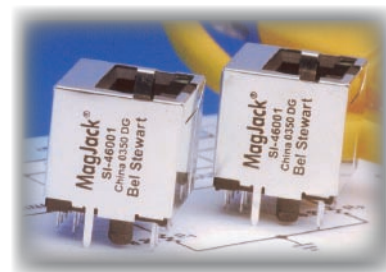



About Bel

Bel (www.belfuse.com) and its subsidiaries are primarily engaged in the design, manufacture and sale of products used in networking, telecommunications, high speed data transmission, and consumer electronics. Products include magnetics (discrete components, power transformers and MagJack® integrated connectors), modules (DC-DC converters, integrated analog front end modules and custom designs), circuit protection (miniature, micro and surface mount fuses) and interconnect devices (passive jacks, plugs and cable assemblies). Bel operates facilities around the world.

Bel Fuse Inc.

206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

Bel Fuse (Macao Commercial Offshore) Ltd.

Rua De Xangai No. 175
Edificio Da Associacao Commercial De Macau
13 Andar H-K
Macao
Tel 853-2870-6137
Fax 853-2870-7483
www.belfuse.com

Bel Fuse Ltd.

8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

Bel Stewart Connector

11118 Susquehanna Trail South
Glen Rock, PA 17327
Tel 717-235-7512
Fax 717-235-7954
www.belstewart.com

Bel Stewart Connector GmbH

Industriestrasse 20, D-61381
Friedrichsdorf, Germany
Tel 49-6172-9552-0
Fax 49-6172-9552-40
www.belstewart.com

Bel Fuse Europe Ltd.

Preston Technology Mgmt Centre
Marsh Lane, Suite G, Preston
Lancashire, PR1 8UQ UK
Tel 44-1772-556601
Fax 44-1772-888366
www.belstewart.com