

# HEF4528B-Q100

Dual monostable multivibrator

Rev. 1 — 14 March 2017

Product data sheet

## 1 General description

The HEF4528B-Q100 is a dual retriggerable-resettable monostable multivibrator. Each multivibrator has an active LOW input ( $n\bar{A}$ ), and active HIGH input ( $nB$ ), an active LOW clear direct input ( $n\bar{CD}$ ), an output ( $nQ$ ) and its complement ( $n\bar{Q}$ ), and two external timing component connecting pins ( $nCEXT$ , always connected to ground, and  $nREXT/CEXT$ ).

An external timing capacitor ( $C_{EXT}$ ) must be connected between  $nCEXT$  and  $nREXT/CEXT$  and an external resistor ( $R_{EXT}$ ) must be connected between  $nREXT/CEXT$  and  $V_{DD}$ . The output pulse duration is determined by the external timing components  $C_{EXT}$  and  $R_{EXT}$ . A HIGH-to-LOW transition on  $n\bar{A}$  when  $nB$  is LOW or a LOW-to-HIGH transition on  $nB$  when  $n\bar{A}$  is HIGH produces a positive pulse (LOW-HIGH-LOW) on  $nQ$  and a negative pulse (HIGH-LOW-HIGH) on  $n\bar{Q}$  if the  $n\bar{CD}$  is HIGH. A LOW on  $n\bar{CD}$  forces  $nQ$  LOW,  $n\bar{Q}$  HIGH and inhibits any further pulses until  $n\bar{CD}$  is HIGH.

It operates over a recommended  $V_{DD}$  power supply range of 3 V to 15 V referenced to  $V_{SS}$  (usually ground). Unused inputs must be connected to  $V_{DD}$ ,  $V_{SS}$ , or another input.

This product has been qualified to the Automotive Electronics Council (AEC) standard Q100 (Grade 3) and is suitable for use in automotive applications.

## 2 Features and benefits

- Automotive product qualification in accordance with AEC-Q100 (Grade 3)
  - Specified from -40 °C to +85 °C
- Fully static operation
- 5 V, 10 V, and 15 V parametric ratings
- Standardized symmetrical output characteristics
- ESD protection:
  - MIL-STD-883, method 3015 exceeds 2000 V
  - HBM JESD22-A114F exceeds 2000 V
  - MM JESD22-A115-A exceeds 200 V ( $C = 200$  pF,  $R = 0$   $\Omega$ )
- Complies with JEDEC standard JESD 13-B

## 3 Ordering information

Table 1. Ordering information

All types operate from -40 °C to +85 °C.

| Type number    | Package |  |          |
|----------------|---------|--|----------|
|                | Name    | Description  | Version  |
| HEF4528BT-Q100 | SO16    | plastic small outline package; 16 leads; body width 3.9 mm | SOT109-1 |

**4 Functional diagram**

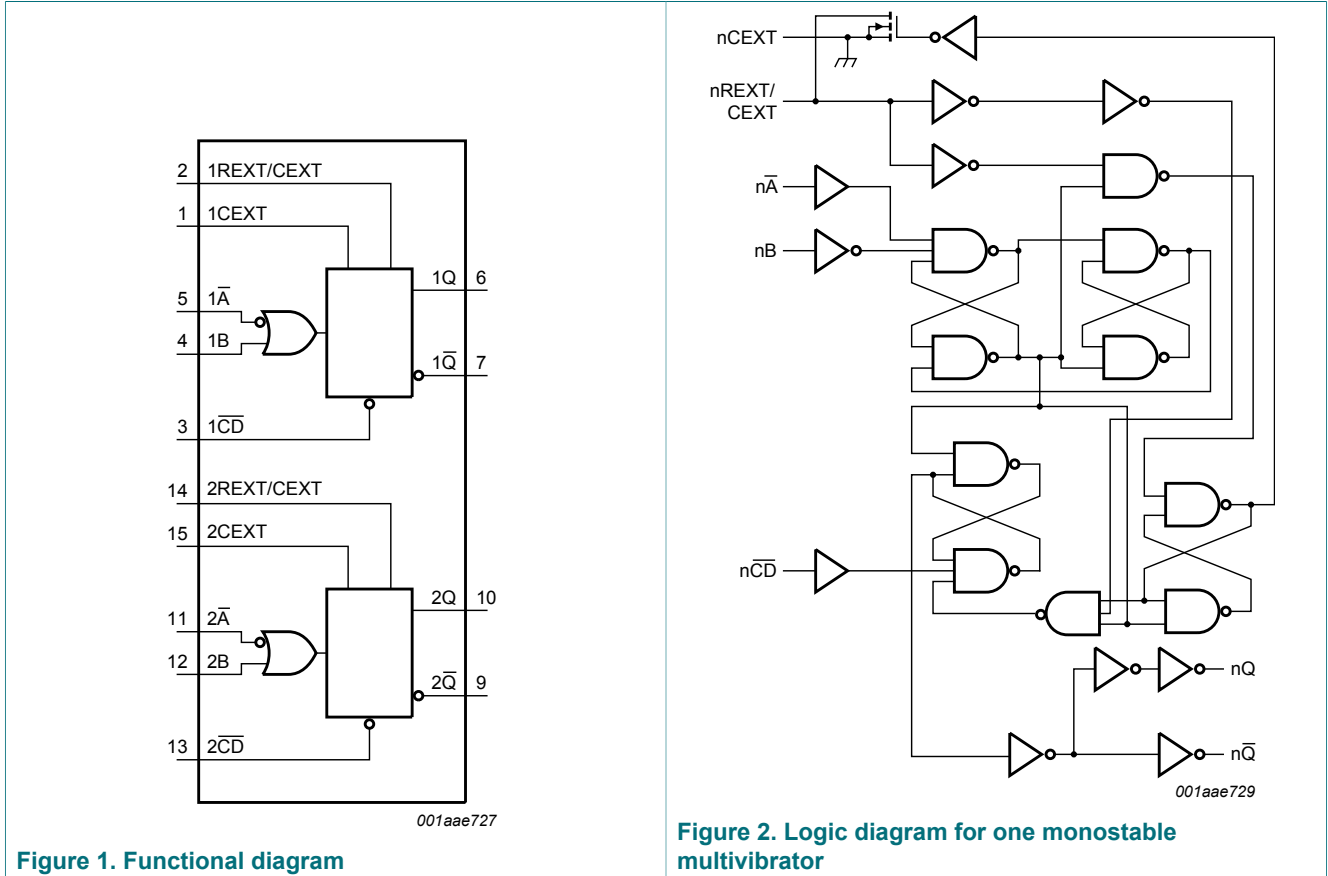


Figure 1. Functional diagram

Figure 2. Logic diagram for one monostable multivibrator

**5 Pinning information**

**5.1 Pinning**

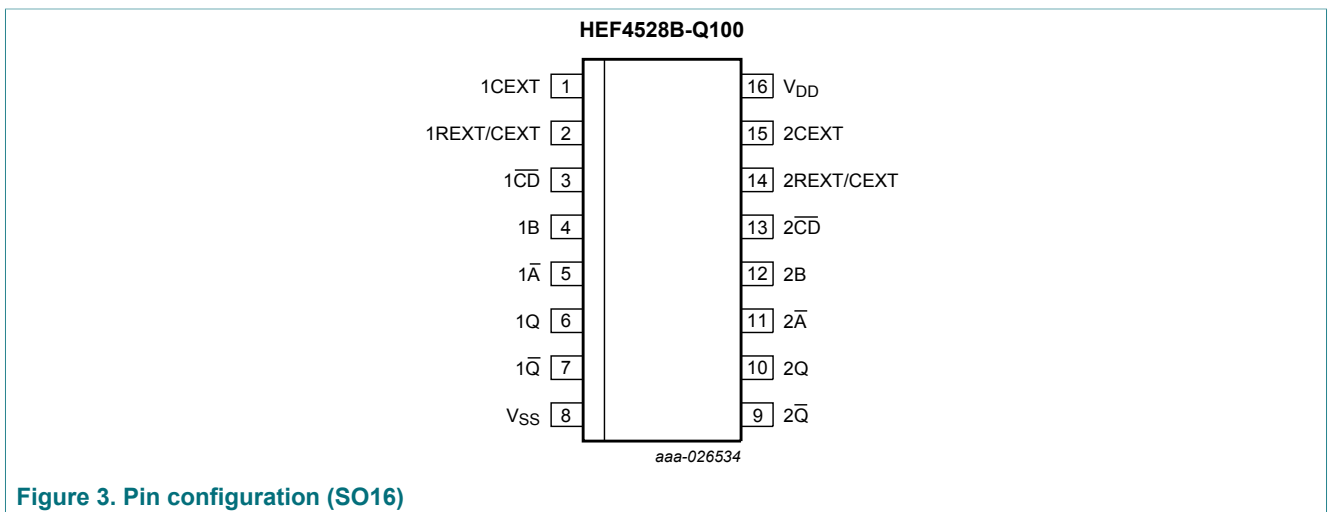


Figure 3. Pin configuration (SO16)





## 5.2 Pin description

Table 2. Pin description


| Symbol                                | Pin   | Description  |
|---------------------------------------|-------|--|
| 1CEXT, 2CEXT                          | 1, 15 | external capacitor connection (always connected to ground) |
| 1REXT/CEXT, 2REXT/CEXT                | 2, 14 | external capacitor/resistor connection                     |
| 1 $\overline{CD}$ , 2 $\overline{CD}$ | 3, 13 | clear direct input (active LOW)                            |
| 1B, 2B                                | 4, 12 | input (LOW-to-HIGH triggered)                              |
| 1 $\overline{A}$ , 2 $\overline{A}$   | 5, 11 | input (HIGH-to-LOW triggered)                              |
| 1Q, 2Q                                | 6, 10 | output   |
| 1 $\overline{Q}$ , 2 $\overline{Q}$   | 7, 9  | complementary output (active LOW)                          |
| V <sub>SS</sub>                       | 8     | ground supply voltage                                      |
| V <sub>DD</sub>                       | 16    | supply voltage   |


## 6 Functional description

Table 3. Function table <sup>[1]</sup>

| Inputs |   |                 | Outputs   |   |
|--------|---|-----------------|---|---|
| A      | B | $\overline{CD}$ | Q   | $\overline{Q}$  |
| ↓      | L | H               |  |  |
| H      | ↑ | H               |  |  |
| X      | X | L               | L   | H   |

- [1] H = HIGH voltage level;  
 L = LOW voltage level;  
 X = don't care;  
 ↑ = positive-going transition;  
 ↓ = negative-going transition;

 = one HIGH level output pulse, with the pulse width determined by C<sub>EXT</sub> and R<sub>EXT</sub>;

 = one LOW level output pulse, with the pulse width determined by C<sub>EXT</sub> and R<sub>EXT</sub>.

## 7 Limiting values

**Table 4. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to  $V_{SS} = 0$  V (ground).

| Symbol    | Parameter               | Conditions                               | Min  | Max            | Unit |
|-----------|-------------------------|--|------|----------------|------|
| $V_{DD}$  | supply voltage          |  | -0.5 | +18            | V    |
| $I_{IK}$  | input clamping current  | $V_I < -0.5$ V or $V_I > V_{DD} + 0.5$ V | -    | $\pm 10$       | mA   |
| $V_I$     | input voltage           |  | -0.5 | $V_{DD} + 0.5$ | V    |
| $I_{OK}$  | output clamping current | $V_O < -0.5$ V or $V_O > V_{DD} + 0.5$ V | -    | $\pm 10$       | mA   |
| $I_{I/O}$ | input/output current    |  | -    | $\pm 10$       | mA   |
| $I_{DD}$  | supply current          |  | -    | 50             | mA   |
| $T_{stg}$ | storage temperature     |  | -65  | +150           | °C   |
| $T_{amb}$ | ambient temperature     |  | -40  | +85            | °C   |
| $P_{tot}$ | total power dissipation | $T_{amb} = -40$ °C to +85 °C             |      |                |      |
|           |                         | SO16 package [1]                         | -    | 500            | mW   |
| $P$       | power dissipation       | per output                               | -    | 100            | mW   |

[1] For SO16 package:  $P_{tot}$  derates linearly with 8 mW/K above 70 °C.

## 8 Recommended operating conditions

**Table 5. Recommended operating conditions**

| Symbol              | Parameter                           | Conditions      | Min | Max      | Unit            |
|---------------------|-------------------------------------|-----------------|-----|----------|-----------------|
| $V_{DD}$            | supply voltage                      |                 | 3   | 15       | V               |
| $V_I$               | input voltage                       |                 | 0   | $V_{DD}$ | V               |
| $T_{amb}$           | ambient temperature                 | in free air     | -40 | +85      | °C              |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{DD} = 5$ V  | -   | 3.75     | $\mu\text{s/V}$ |
|                     |                                     | $V_{DD} = 10$ V | -   | 0.5      | $\mu\text{s/V}$ |
|                     |                                     | $V_{DD} = 15$ V | -   | 0.08     | $\mu\text{s/V}$ |

## 9 Static characteristics

**Table 6. Static characteristics**
 $V_{SS} = 0\text{ V}$ ;  $V_I = V_{SS}$  or  $V_{DD}$  unless otherwise specified.

| Symbol   | Parameter                 | Conditions  | $V_{DD}$ | $T_{amb} = -40\text{ °C}$ |           | $T_{amb} = 25\text{ °C}$ |           | $T_{amb} = 85\text{ °C}$ |           | Unit          |
|----------|---------------------------|---|----------|---------------------------|-----------|--------------------------|-----------|--------------------------|-----------|---------------|
|          |                           |   |          | Min                       | Max       | Min                      | Max       | Min                      | Max       |               |
| $V_{IH}$ | HIGH-level input voltage  | $ I_O  < 1\text{ }\mu\text{A}$                      | 5 V      | 3.5                       | -         | 3.5                      | -         | 3.5                      | -         | V             |
|          |                           |   | 10 V     | 7.0                       | -         | 7.0                      | -         | 7.0                      | -         | V             |
|          |                           |   | 15 V     | 11.0                      | -         | 11.0                     | -         | 11.0                     | -         | V             |
| $V_{IL}$ | LOW-level input voltage   | $ I_O  < 1\text{ }\mu\text{A}$                      | 5 V      | -                         | 1.5       | -                        | 1.5       | -                        | 1.5       | V             |
|          |                           |   | 10 V     | -                         | 3.0       | -                        | 3.0       | -                        | 3.0       | V             |
|          |                           |   | 15 V     | -                         | 4.0       | -                        | 4.0       | -                        | 4.0       | V             |
| $V_{OH}$ | HIGH-level output voltage | $ I_O  < 1\text{ }\mu\text{A}$                      | 5 V      | 4.95                      | -         | 4.95                     | -         | 4.95                     | -         | V             |
|          |                           |   | 10 V     | 9.95                      | -         | 9.95                     | -         | 9.95                     | -         | V             |
|          |                           |   | 15 V     | 14.95                     | -         | 14.95                    | -         | 14.95                    | -         | V             |
| $V_{OL}$ | LOW-level output voltage  | $ I_O  < 1\text{ }\mu\text{A}$                      | 5 V      | -                         | 0.05      | -                        | 0.05      | -                        | 0.05      | V             |
|          |                           |   | 10 V     | -                         | 0.05      | -                        | 0.05      | -                        | 0.05      | V             |
|          |                           |   | 15 V     | -                         | 0.05      | -                        | 0.05      | -                        | 0.05      | V             |
| $I_{OH}$ | HIGH-level output current | $V_O = 2.5\text{ V}$                                | 5 V      | -                         | -1.7      | -                        | -1.4      | -                        | -1.1      | mA            |
|          |                           | $V_O = 4.6\text{ V}$                                | 5 V      | -                         | -0.52     | -                        | -0.44     | -                        | -0.36     | mA            |
|          |                           | $V_O = 9.5\text{ V}$                                | 10 V     | -                         | -1.3      | -                        | -1.1      | -                        | -0.9      | mA            |
|          |                           | $V_O = 13.5\text{ V}$                               | 15 V     | -                         | -3.6      | -                        | -3.0      | -                        | -2.4      | mA            |
| $I_{OL}$ | LOW-level output current  | $V_O = 0.4\text{ V}$                                | 5 V      | 0.52                      | -         | 0.44                     | -         | 0.36                     | -         | mA            |
|          |                           | $V_O = 0.5\text{ V}$                                | 10 V     | 1.3                       | -         | 1.1                      | -         | 0.9                      | -         | mA            |
|          |                           | $V_O = 1.5\text{ V}$                                | 15 V     | 3.6                       | -         | 3.0                      | -         | 2.4                      | -         | mA            |
| $I_I$    | input leakage current     |   | 15 V     | -                         | $\pm 0.3$ | -                        | $\pm 0.3$ | -                        | $\pm 1.0$ | $\mu\text{A}$ |
| $I_{DD}$ | supply current            | all valid input combinations;<br>$I_O = 0\text{ A}$ | 5 V      | -                         | 20        | -                        | 20        | -                        | 150       | $\mu\text{A}$ |
|          |                           |   | 10 V     | -                         | 40        | -                        | 40        | -                        | 300       | $\mu\text{A}$ |
|          |                           |   | 15 V     | -                         | 80        | -                        | 80        | -                        | 600       | $\mu\text{A}$ |
| $C_I$    | input capacitance         |   | -        | -                         | -         | -                        | 7.5       | -                        | -         | pF            |

10 Dynamic characteristics

Table 7. Dynamic characteristics

$V_{SS} = 0\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; unless otherwise specified; for waveforms see Figure 4 to Figure 6; for test circuit see Figure 7.

| Symbol           | Parameter                     | Conditions  | V <sub>DD</sub>    | Extrapolation formula <sup>[1]</sup> | Min | Typ  | Max | Unit |
|------------------|-------------------------------|---|--------------------|--------------------------------------|-----|------|-----|------|
| t <sub>PHL</sub> | HIGH to LOW propagation delay | n $\bar{A}$ or nB to n $\bar{Q}$ ;<br>see Figure 5  | 5 V                | 113 ns + (0.55 ns/pF)C <sub>L</sub>  | -   | 140  | 280 | ns   |
|                  |                               |   | 10 V               | 39 ns + (0.23 ns/pF)C <sub>L</sub>   | -   | 50   | 100 | ns   |
|                  |                               |   | 15 V               | 27 ns + (0.16 ns/pF)C <sub>L</sub>   | -   | 35   | 70  | ns   |
|                  |                               | n $\bar{C}\bar{D}$ to nQ;<br>see Figure 5   | 5 V                | 78 ns + (0.55 ns/pF)C <sub>L</sub>   | -   | 105  | 210 | ns   |
|                  |                               |   | 10 V               | 29 ns + (0.23 ns/pF)C <sub>L</sub>   | -   | 40   | 85  | ns   |
|                  |                               |   | 15 V               | 22 ns + (0.16 ns/pF)C <sub>L</sub>   | -   | 30   | 60  | ns   |
| t <sub>PLH</sub> | LOW to HIGH propagation delay | n $\bar{A}$ or nB to nQ;<br>see Figure 5  | 5 V                | 128 ns + (0.55 ns/pF)C <sub>L</sub>  | -   | 155  | 305 | ns   |
|                  |                               |   | 10 V               | 49 ns + (0.23 ns/pF)C <sub>L</sub>   | -   | 60   | 115 | ns   |
|                  |                               |   | 15 V               | 32 ns + (0.16 ns/pF)C <sub>L</sub>   | -   | 40   | 80  | ns   |
|                  |                               | n $\bar{C}\bar{D}$ to n $\bar{Q}$ ;<br>see Figure 5   | 5 V                | 93 ns + (0.55 ns/pF)C <sub>L</sub>   | -   | 120  | 240 | ns   |
|                  |                               |   | 10 V               | 39 ns + (0.23 ns/pF)C <sub>L</sub>   | -   | 50   | 105 | ns   |
|                  |                               |   | 15 V               | 27 ns + (0.16 ns/pF)C <sub>L</sub>   | -   | 35   | 70  | ns   |
| t <sub>t</sub>   | transition time               | nQ, n $\bar{Q}$ ;<br>see Figure 5   | 5 V <sup>[2]</sup> | 10 ns + (1.00 ns/pF)C <sub>L</sub>   | -   | 60   | 120 | ns   |
|                  |                               |   | 10 V               | 9 ns + (0.42 ns/pF)C <sub>L</sub>    | -   | 30   | 60  | ns   |
|                  |                               |   | 15 V               | 6 ns + (0.28 ns/pF)C <sub>L</sub>    | -   | 20   | 40  | ns   |
| t <sub>rec</sub> | recovery time                 | n $\bar{C}\bar{D}$ to n $\bar{A}$ or nB;<br>see Figure 6  | 5 V                |                                      | 0   | -75  | -   | ns   |
|                  |                               |   | 10 V               |                                      | 0   | -30  | -   | ns   |
|                  |                               |   | 15 V               |                                      | 0   | -25  | -   | ns   |
| t <sub>su</sub>  | set-up time                   | n $\bar{C}\bar{D}$ to n $\bar{A}$ or nB;<br>see Figure 6  | 5 V                |                                      | 0   | -105 | -   | ns   |
|                  |                               |   | 10 V               |                                      | 0   | -40  | -   | ns   |
|                  |                               |   | 15 V               |                                      | 0   | -25  | -   | ns   |
| t <sub>w</sub>   | pulse width                   | n $\bar{A}$ LOW;<br>minimum width;<br>see Figure 6  | 5 V                |                                      | 50  | 25   | -   | ns   |
|                  |                               |   | 10 V               |                                      | 30  | 15   | -   | ns   |
|                  |                               |   | 15 V               |                                      | 20  | 10   | -   | ns   |
|                  |                               | nB HIGH;<br>minimum width;<br>see Figure 6  | 5 V                |                                      | 50  | 25   | -   | ns   |
|                  |                               |   | 10 V               |                                      | 30  | 15   | -   | ns   |
|                  |                               |   | 15 V               |                                      | 20  | 10   | -   | ns   |
|                  |                               | n $\bar{C}\bar{D}$ LOW;<br>minimum width;<br>see Figure 6   | 5 V                |                                      | 60  | 30   | -   | ns   |
|                  |                               |   | 10 V               |                                      | 35  | 15   | -   | ns   |
|                  |                               |   | 15 V               |                                      | 25  | 10   | -   | ns   |
|                  |                               | nQ or n $\bar{Q}$ ;<br>R <sub>EXT</sub> = 5 k $\Omega$ ;<br>C <sub>EXT</sub> = 15 pF;<br>see Figure 6 | 5 V <sup>[3]</sup> |                                      | -   | 235  | -   | ns   |
|                  |                               |   | 10 V               |                                      | -   | 155  | -   | ns   |
|                  |                               |   | 15 V               |                                      | -   | 140  | -   | ns   |

| Symbol           | Parameter                 | Conditions  | V <sub>DD</sub>    | Extrapolation formula <sup>[1]</sup> | Min       | Typ  | Max | Unit |
|------------------|---------------------------|---|--------------------|--------------------------------------|-----------|------|-----|------|
|                  |                           | nQ or nQ̄;<br>R <sub>EXT</sub> = 10 kΩ;<br>C <sub>EXT</sub> = 1 nF;<br>see <a href="#">Figure 6</a> | 5 V <sup>[4]</sup> |                                      | -         | 5.45 | -   | μs   |
|                  |                           |   | 10 V               |                                      | -         | 4.95 | -   | μs   |
|                  |                           |   | 15 V               |                                      | -         | 4.85 | -   | μs   |
| Δt <sub>W</sub>  | pulse width variation     | nQ output variation over temperature range  | 5 V <sup>[5]</sup> |                                      | -         | ±3   | -   | %    |
|                  |                           |   | 10 V               |                                      | -         | ±2   | -   | %    |
|                  |                           |   | 15 V               |                                      | -         | ±2   | -   | %    |
|                  |                           | nQ output variation over voltage range V <sub>DD</sub> ± 5 %  | 5 V                |                                      | -         | ±2   | -   | %    |
|                  |                           |   | 10 V               |                                      | -         | ±1   | -   | %    |
|                  |                           |   | 15 V               |                                      | -         | ±1   | -   | %    |
| R <sub>EXT</sub> | external timing resistor  | see <a href="#">Figure 4</a>  | 5 V                |                                      | 5         | -    | 2   | MΩ   |
|                  |                           |   | 10 V               |                                      | 5         | -    | 2   | MΩ   |
|                  |                           |   | 15 V               |                                      | 5         | -    | 2   | MΩ   |
| C <sub>EXT</sub> | external timing capacitor | see <a href="#">Figure 4</a>  | 5 V                |                                      | no limits |      |     |      |
|                  |                           |   | 10 V               |                                      | no limits |      |     |      |
|                  |                           |   | 15 V               |                                      | no limits |      |     |      |

[1] The typical values of the propagation delay and transition times are calculated from the extrapolation formulas shown (C<sub>L</sub> in pF).

[2] t<sub>t</sub> is the same as t<sub>THL</sub> and t<sub>TLH</sub>.

[3] For other R<sub>EXT</sub>, C<sub>EXT</sub> combinations and C<sub>EXT</sub> < 0.01 μF see [Figure 4](#).

[4] For other R<sub>EXT</sub>, C<sub>EXT</sub> combinations and C<sub>EXT</sub> > 0.01 μF use formula t<sub>W</sub> = K × R<sub>EXT</sub> × C<sub>EXT</sub>.

where: t<sub>W</sub> = output pulse width (s);

R<sub>EXT</sub> = external timing resistor (Ω);

C<sub>EXT</sub> = external timing capacitor (F);

K = 0.42 for V<sub>DD</sub> = 5 V;

K = 0.32 for V<sub>DD</sub> = 10 V;


K = 0.30 for V<sub>DD</sub> = 15 V.

[5] T<sub>amb</sub> = -40 °C to +85 °C; Δt<sub>W</sub> is referenced to t<sub>W</sub> at T<sub>amb</sub> = 25 °C.

**Table 8. Dynamic power dissipation P<sub>D</sub>**

P<sub>D</sub> can be calculated from the formulas shown. V<sub>SS</sub> = 0 V; t<sub>r</sub> = t<sub>f</sub> ≤ 20 ns; T<sub>amb</sub> = 25 °C.


| Symbol         | Parameter                 | V <sub>DD</sub> | Typical formula for P <sub>D</sub> (μW)                           | where:  |
|----------------|---------------------------|-----------------|---|---|
| P <sub>D</sub> | dynamic power dissipation | 5 V             | $P_D = 4000 \times f_i + \Sigma(f_o \times C_L) \times V_{DD}^2$  | f <sub>i</sub> = input frequency in MHz;<br>f <sub>o</sub> = output frequency in MHz;<br>C <sub>L</sub> = output load capacitance in pF;<br>V <sub>DD</sub> = supply voltage in V;<br>Σ(f <sub>o</sub> × C <sub>L</sub> ) = sum of the outputs. |
|                |                           | 10 V            | $P_D = 20000 \times f_i + \Sigma(f_o \times C_L) \times V_{DD}^2$ |   |
|                |                           | 15 V            | $P_D = 59000 \times f_i + \Sigma(f_o \times C_L) \times V_{DD}^2$ |   |

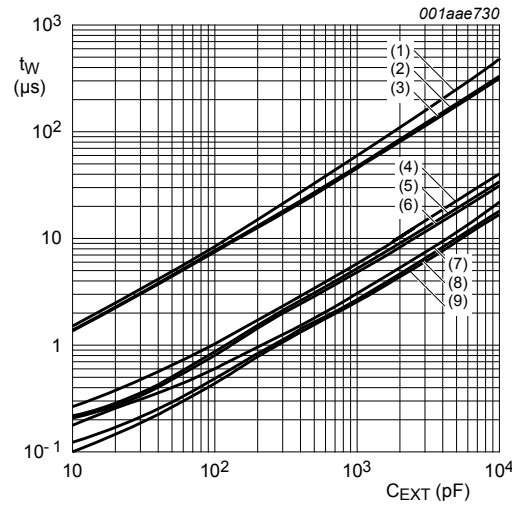

- (1)  $R_{EXT} = 100\text{ k}\Omega$ ,  $V_{DD} = 5\text{ V}$ .
- (2)  $R_{EXT} = 100\text{ k}\Omega$ ,  $V_{DD} = 10\text{ V}$ .
- (3)  $R_{EXT} = 100\text{ k}\Omega$ ,  $V_{DD} = 15\text{ V}$ .
- (4)  $R_{EXT} = 10\text{ k}\Omega$ ,  $V_{DD} = 5\text{ V}$ .
- (5)  $R_{EXT} = 10\text{ k}\Omega$ ,  $V_{DD} = 10\text{ V}$ .
- (6)  $R_{EXT} = 10\text{ k}\Omega$ ,  $V_{DD} = 15\text{ V}$ .
- (7)  $R_{EXT} = 5\text{ k}\Omega$ ,  $V_{DD} = 5\text{ V}$ .
- (8)  $R_{EXT} = 5\text{ k}\Omega$ ,  $V_{DD} = 10\text{ V}$ .
- (9)  $R_{EXT} = 5\text{ k}\Omega$ ,  $V_{DD} = 15\text{ V}$ .

Figure 4. Output pulse width ( $t_w$ ) as a function of external timing capacitor ( $C_{EXT}$ )


### 10.1 Waveforms and test circuit

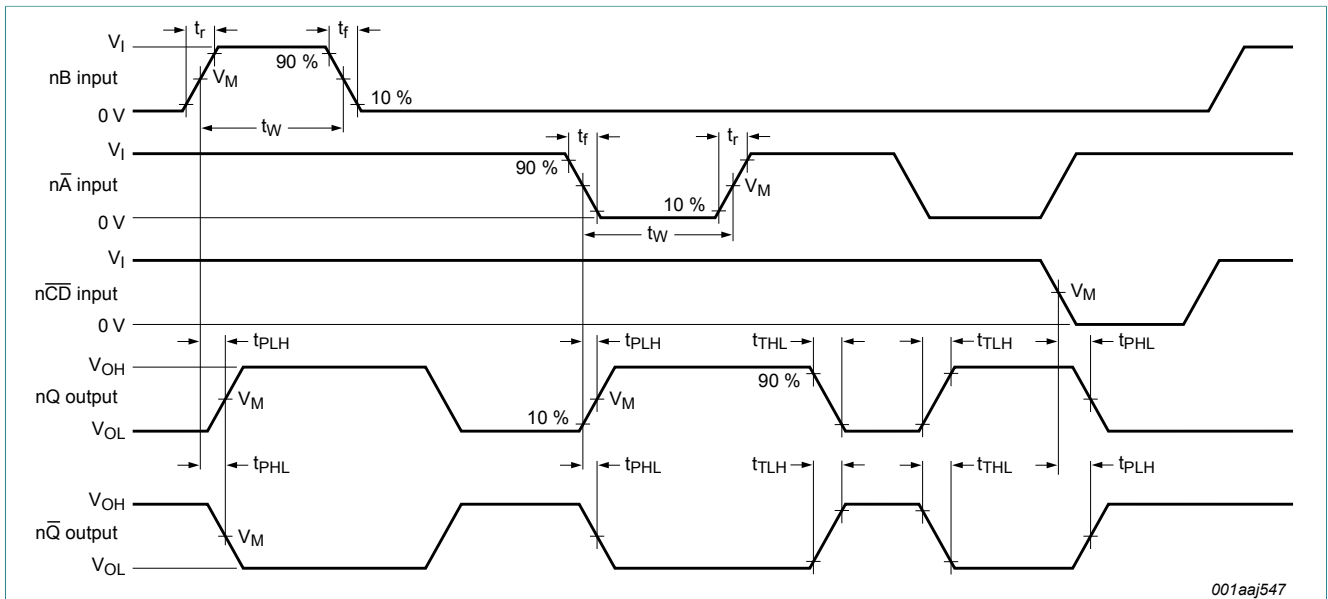

Measurement points are given in [Table 9](#).  
 Logic levels:  $V_{OL}$  and  $V_{OH}$  are typical output levels that occur with the output load.

Figure 5. Waveforms showing propagation delays and transition times



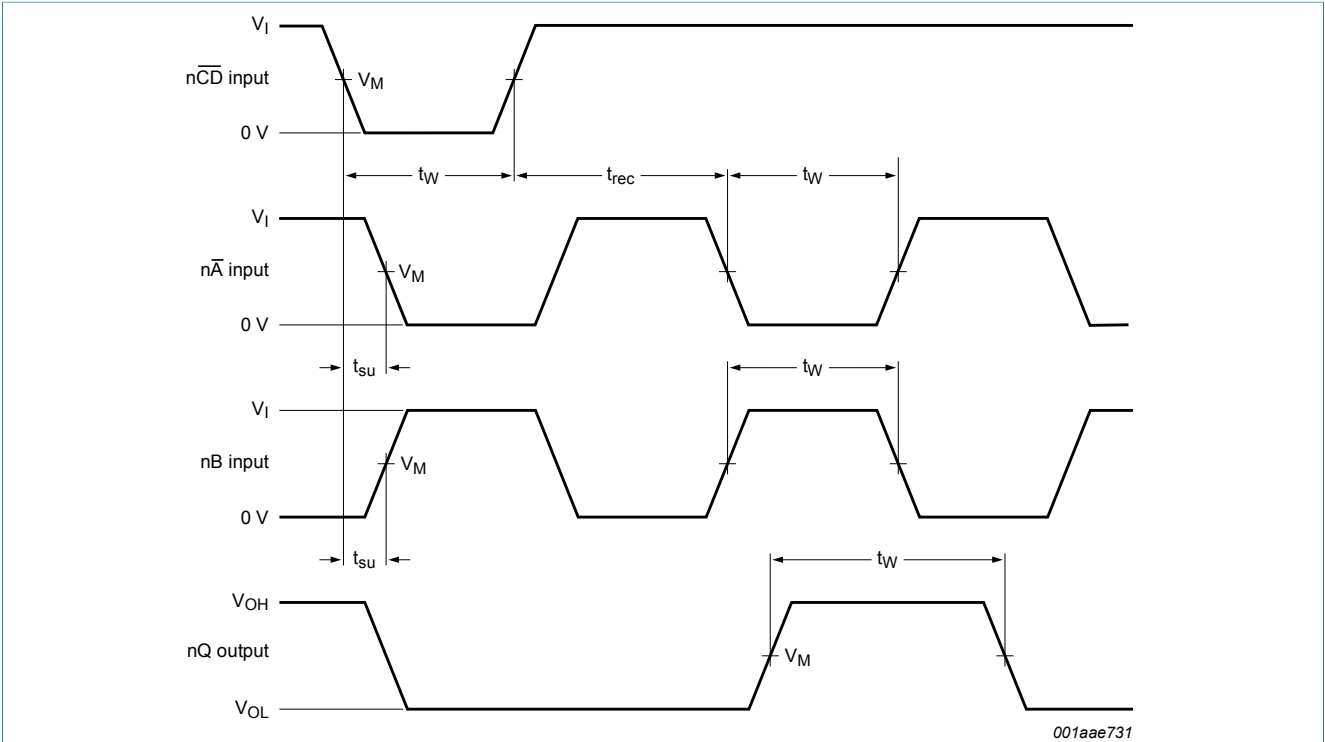

Measurement points are given in [Table 9](#).


Set-up and recovery times are shown as positive values but may be specified as negative values.

Logic levels:  $V_{OL}$  and  $V_{OH}$  are typical output levels that occur with the output load.

**Figure 6. Waveforms showing minimum  $n\bar{A}$ ,  $nB$ , and  $nQ$  pulse widths and set-up and recovery times**

**Table 9. Measurement points**

| Supply voltage | Input       | Output      |
|----------------|-------------|-------------|
| $V_{DD}$       | $V_M$       | $V_M$       |
| 5 V to 15 V    | $0.5V_{DD}$ | $0.5V_{DD}$ |

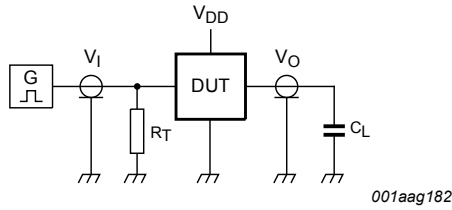

Test data is given in [Table 10](#).

Definitions for test circuit:

$C_L$  = load capacitance including jig and probe capacitance.

$R_T$  = termination resistance should be equal to the output impedance  $Z_o$  of the pulse generator.

Figure 7. Test circuit for measuring switching times


Table 10. Test data

| Supply voltage | Input                |              | Load  |
|----------------|----------------------|--------------|-------|
| $V_{DD}$       | $V_I$                | $t_r, t_f$   | $C_L$ |
| 5 V to 15 V    | $V_{SS}$ or $V_{DD}$ | $\leq 20$ ns | 50 pF |


## 11 Application information

An example of a HEF4528B application is:

- Non-retriggerable monostable multivibrator

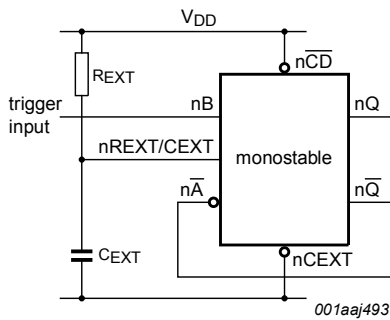

a. Rising edge triggered

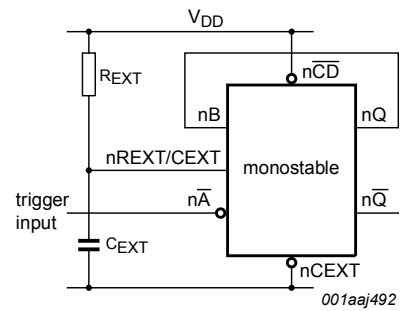


b. Falling edge triggered

Figure 8. Non-retriggerable applications

12 Package outline

SO16: plastic small outline package; 16 leads; body width 3.9 mm

SOT109-1

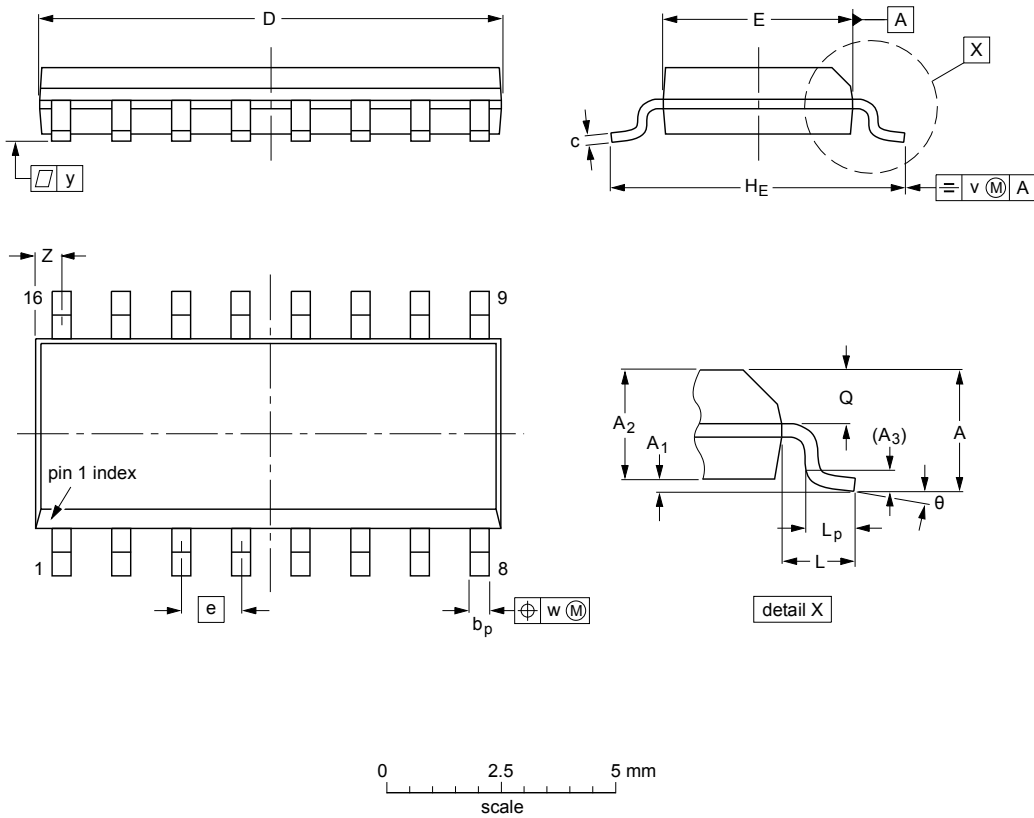

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

| UNIT   | A max. | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | b <sub>p</sub> | c                | D <sup>(1)</sup> | E <sup>(1)</sup> | e    | H <sub>E</sub> | L     | L <sub>p</sub> | Q              | v    | w    | y     | Z <sup>(1)</sup> | θ        |
|--------|--------|----------------|----------------|----------------|----------------|------------------|------------------|------------------|------|----------------|-------|----------------|----------------|------|------|-------|------------------|----------|
| mm     | 1.75   | 0.25<br>0.10   | 1.45<br>1.25   | 0.25           | 0.49<br>0.36   | 0.25<br>0.19     | 10.0<br>9.8      | 4.0<br>3.8       | 1.27 | 6.2<br>5.8     | 1.05  | 1.0<br>0.4     | 0.7<br>0.6     | 0.25 | 0.25 | 0.1   | 0.7<br>0.3       | 8°<br>0° |
| inches | 0.069  | 0.010<br>0.004 | 0.057<br>0.049 | 0.01           | 0.019<br>0.014 | 0.0100<br>0.0075 | 0.39<br>0.38     | 0.16<br>0.15     | 0.05 | 0.244<br>0.228 | 0.041 | 0.039<br>0.016 | 0.028<br>0.020 | 0.01 | 0.01 | 0.004 | 0.028<br>0.012   |          |

Note

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

| OUTLINE VERSION | REFERENCES |        |       | EUROPEAN PROJECTION | ISSUE DATE           |
|-----------------|------------|--------|-------|---------------------|----------------------|
|                 | IEC        | JEDEC  | JEITA |                     |                      |
| SOT109-1        | 076E07     | MS-012 |       |                     | 99-12-27<br>03-02-19 |

Figure 9. Package outline SOT109-1 (SO16)

## 13 Abbreviations

Table 11. Abbreviations

| Acronym | Description             |
|---------|-------------------------|
| DUT     | Device Under Test       |
| ESD     | ElectroStatic Discharge |
| HBM     | Human Body Model        |
| MIL     | Military                |
| MM      | Machine Model           |

## 14 Revision history

Table 12. Revision history

| Document ID       | Release date | Data sheet status  | Change notice | Supersedes |
|-------------------|--------------|--------------------|---------------|------------|
| HEF4528B_Q100 v.1 | 20170314     | Product data sheet | -             | -          |

## 15 Legal information

### 15.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition  |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nexperia.com>.

### 15.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 15.3 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia. In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation

or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Suitability for use in automotive applications** — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

## 15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## Contents

|      |  |    |
|------|--|----|
| 1    | General description .....              | 1  |
| 2    | Features and benefits .....            | 1  |
| 3    | Ordering information .....             | 1  |
| 4    | Functional diagram .....               | 2  |
| 5    | Pinning information .....              | 2  |
| 5.1  | Pinning .....                          | 2  |
| 5.2  | Pin description .....                  | 3  |
| 6    | Functional description .....           | 3  |
| 7    | Limiting values .....                  | 4  |
| 8    | Recommended operating conditions ..... | 4  |
| 9    | Static characteristics .....           | 5  |
| 10   | Dynamic characteristics .....          | 6  |
| 10.1 | Waveforms and test circuit .....       | 8  |
| 11   | Application information .....          | 10 |
| 12   | Package outline .....                  | 11 |
| 13   | Abbreviations .....                    | 12 |
| 14   | Revision history .....                 | 12 |
| 15   | Legal information .....                | 13 |

---

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

---

© Nexperia B.V. 2017.

All rights reserved.

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

Date of release: 14 March 2017

Document identifier: HEF4528B\_Q100

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Nexperia:](#)

[HEC4528BT,112](#) [HEC4528BT,118](#) [HEF4528BT-Q100J](#)