


Features

- High protection ability against EMI
- Circular lens for improved reception characteristics
- Available for various carrier frequencies
- Min burst length: 6 cycles
- Min gap length: 10 cycles
- Suitable for continuous code
- Low operating voltage and low power consumption
- Optimized immunity against TFT backlight interferences
- High immunity against ambient light
- Long reception range
- High sensitivity
- Pb free and RoHS compliant



1 2 3

Description

The IRM-36xxM3F45 series devices are miniature type infrared receivers which have been developed and designed by using the latest IC technology, specially optimized to suppress interferences from TFT backlight.

The photo diode and preamplifier are assembled onto a lead frame and molded into an epoxy package which operates as an IR filter.

The demodulated output signal can directly be decoded by a microprocessor.


Pin Configuration

1. OUT
2. GND


Applications

- AV equipment such as TV, VCR, DVD, CD, MD, etc.
- Short pause time protocols
- Toy applications
- CATV set top boxes
- Multi-media Equipment
- Other devices using IR remote control

Application Circuit

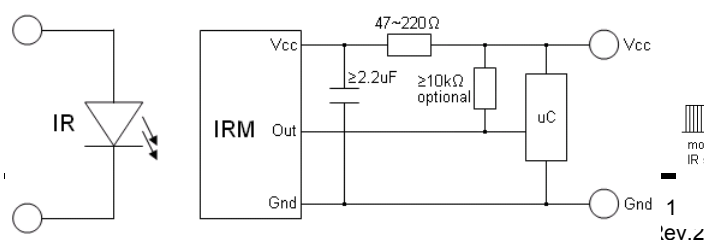

Block Diagram

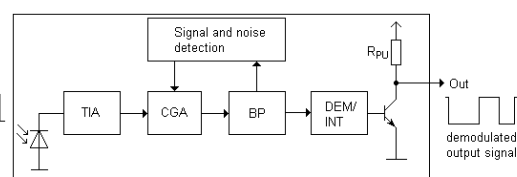

NOV 14, 2011


The RC Filter must be connected as close as possible to Vcc and GND pins.

Parts Table

| Model No. | Carrier Frequency |
|---------------|-------------------|
| IRM-3636M3F45 | 36 kHz |
| IRM-3638M3F45 | 38 kHz |
| IRM-3640M3F45 | 40 kHz |

Package Dimensions (Dimensions in mm)

EVERLIGHT

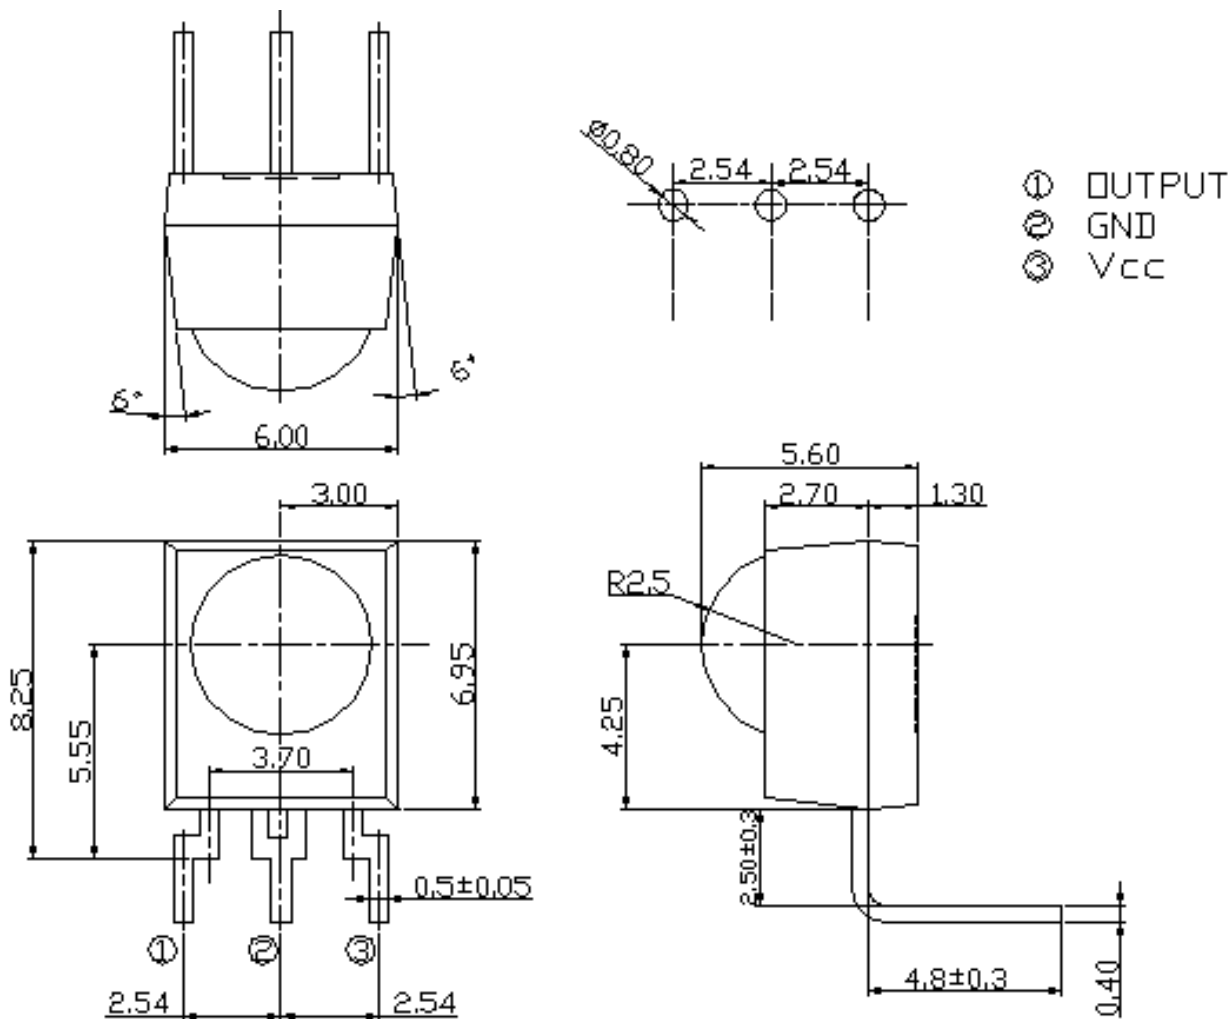

Notes:

Tolerances unless dimensions $\pm 0.3\text{mm}$.

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

| Parameter | Symbol | Rating | Unit |
|-----------------------|--------|-----------|------|
| Supply Voltage | Vcc | 6 | V |
| Operating Temperature | Topr | -20 ~ +80 | |
| Storage Temperature | Tstg | -40 ~ +85 | |

| | | | |
|--------------------------|------|-----|--|
| Soldering Temperature *1 | Tsol | 260 | |
|--------------------------|------|-----|--|

*1 4mm from mold body for less than 10 seconds

Electro-Optical Characteristics (Ta=25 , Vcc=3V)

| Parameter | Symbol | MIN. | TYP. | MAX. | Unit | Condition | |
|---------------------------|-----------------|----------------------|------|------|------|------------------------------|---|
| Current consumption | I _{CC} | --- | 0.4 | 0.6 | mA | No input signal | |
| Supply voltage | V _{CC} | 2.7 | - | 5.5 | V | | |
| Peak wavelength | λ _p | --- | 940 | --- | nm | | |
| Reception range | L ₀ | 14 | --- | --- | m | See chapter ,Test method' | |
| | L ₄₅ | 6 | --- | --- | | | |
| Half angle(horizontal) | φ _h | --- | ±35 | --- | deg | | |
| Half angle(vertical) | φ _v | --- | ±35 | --- | deg | | |
| High level pulse width | T _H | 450 | --- | 700 | μs | | Test signal according to figure 1 |
| Low level pulse width | T _L | 500 | --- | 750 | μs | | |
| High level output voltage | V _{OH} | V _{CC} -0.4 | --- | --- | V | I _{SOURCE} 1μA | |
| Low level output voltage | V _{OL} | --- | 0.2 | 0.5 | V | I _{SINK} 2mA | |
| Internal pull up resistor | R _{PU} | 85 | 100 | 115 | kΩ | | |

Test method

The specified electro-optical characteristics are valid under the following conditions.

1. Measurement environment

A place without extreme light reflections.

2. External light


The environment contains an ordinary, white fluorescent lamp without high frequency modulation. The color temperature is 2856K and the illumination at the IR receiver is less than 10 Lux (Ev 10Lux).

3. Standard transmitter

The test transmitter is calibrated by using the circuit shown in figure 2. The radiation intensity of the transmitter is adjusted until $V_o=400mVp-p$. Both, the test transmitter and the photo diode, have a peak wavelength of 940nm. The photo diode for calibration is PD438B ($\lambda_p=940nm$, $V_r=5V$).

4. The measurement system is shown in Fig.-3

Fig.-1 Transmitter Wave Form

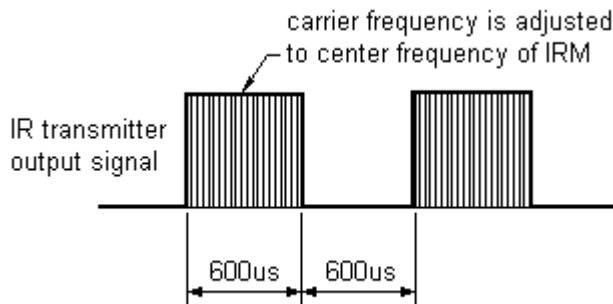

D.U.T output Pulse

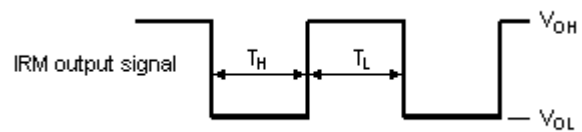


Fig.-2 standard transmitter calibration


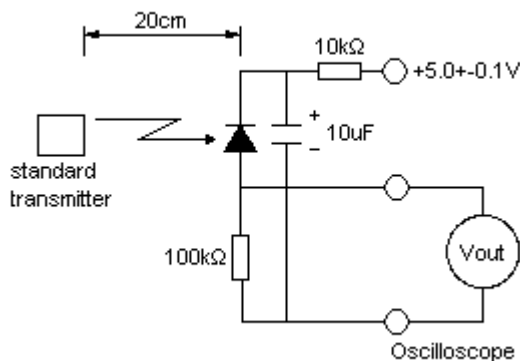


Fig.-3 Measuring System

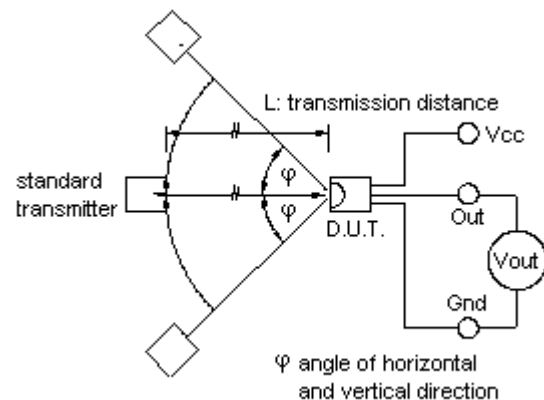

Typical Electro-Optical Characteristic Curves

Fig.4 Relative Responsibility vs. Wavelength

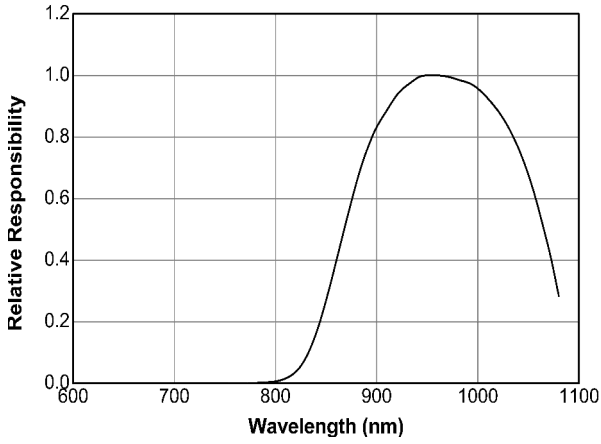


Fig.5 Relative Sensitivity vs. Angle

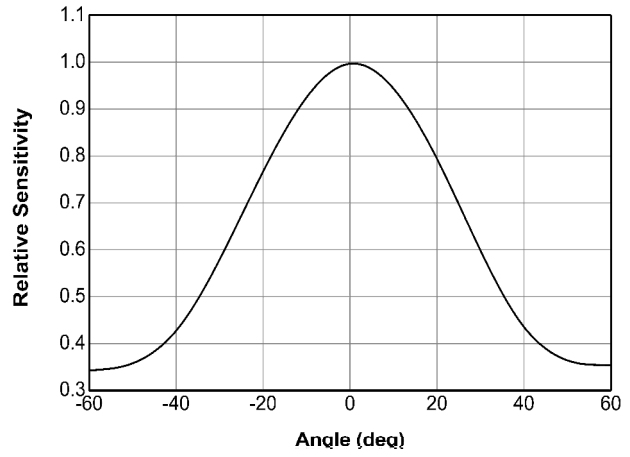


Fig.6 Variation Output Pulse Width vs. Distance

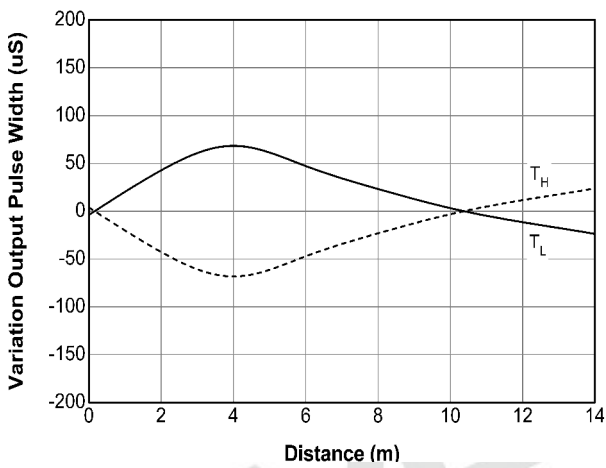


Fig.7 Relative Sensitivity vs. Supply Voltage


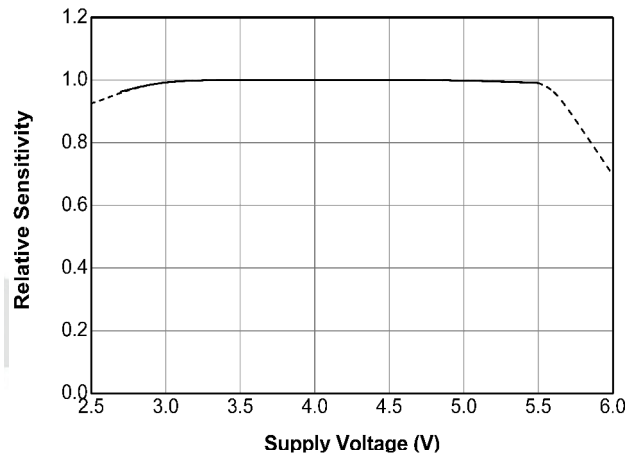



Fig.8 Relative Sensitivity vs. Frequency

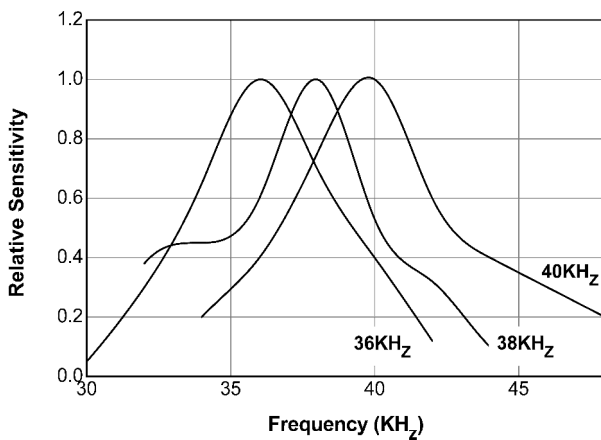

Code information

| Protocol | Suitable | Protocol | Suitable |
|------------|----------|-----------------|----------|
| JVC | Yes | RCA | Yes |
| Matsushita | Yes | Sharp | Yes |
| Mitsubishi | Yes | Sony 12 Bit | Yes |
| NEC | Yes | Sony 15 Bit | No |
| RC5 | Yes | Sony 20Bit | No |
| RC6 | Yes | Toshiba | Yes |
| RCMM | Yes | Zenith | Yes |
| RCS-80 | Yes | Continuous Code | Yes |

Device Marking

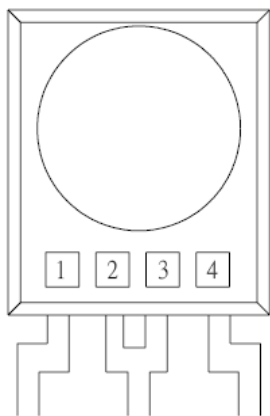

Notes

- 1 denotes Year code
- 2 denotes Month code
- 3 denotes Device number
- 4 denotes Carrier frequency (2: 36KHz, 4: 38KHz and 5: 40KHz)

Packing Quantity

1500 pcs / Box

10 Boxes / Carton

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.

EVERLIGHT