

SOD-523 SURFACE MOUNT

Very Small Outline Flat Lead Plastic Package Transient Voltage Suppressors ESD Protection Diodes

SOD-523



Device Marking:5C



SYMBOL

Specification Features:

- Stand-off Voltage: 5V0
- Low Leakage
- Response Time is Typically < 1ns
- IEC61000-4-2 Level 4 ESD Protection
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish

Absolute Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted


Symbol	Parameter	Value	Units
V_{pp}	IEC61000-4-2(ESD) Air Contact	± 15 ± 8	KV
ESD	Per Human Body Model	16	KV
P_D	Power Dissipation (Note 1)	150	mW
T_{STG}	Storage Temperature Range	-55 to +150	$^\circ\text{C}$
T_J	Operating Junction Temperature	+150	$^\circ\text{C}$
T_L	Max Lead Solder Temperature range (10 Second Duration)	260	$^\circ\text{C}$

These ratings are limiting values above which the serviceability of the diode may be impaired.

Note 1. FR-5 = 1.0 x 0.75 x 0.62 in.

Electrical Parameter

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
I_T	Test Current
V_{BR}	Breakdown Voltage @ I_T

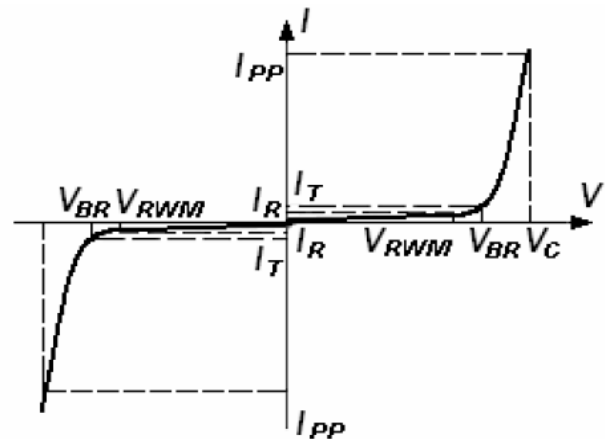

Electrical Characteristics (T_A = 25°C unless otherwise noted)

Device Type	V _{RWM} (Volts)	I _R @ V _{RWM} (μA)	V _{BR} @ I _T (Note 2) (Volts)		I _T (mA)	I _{PP+} (A)	V _C @ Max I _{PP+} (Volts)	P _{PK+} (W)	C @ V _R = 0V, f = 1MHz (pF)
	Max	Max	Min	Max		Max	Max	Max	Max
ESD5Z5.0C	5.0	1	5.6	7.8	1.0	4	12	48	15

+ Surge current waveform per Figure 1.

Note 2: V_{BR} is measured with a pulse test current I_T at an ambient temperature of 25°C.

SURGE CURRENT WAVEFORM


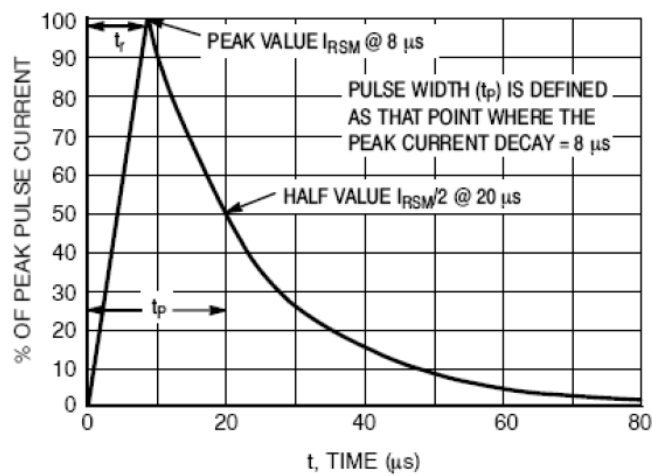


Figure 1. 8 x 20 μs Pulse Waveform

SOD-523 Package Outline

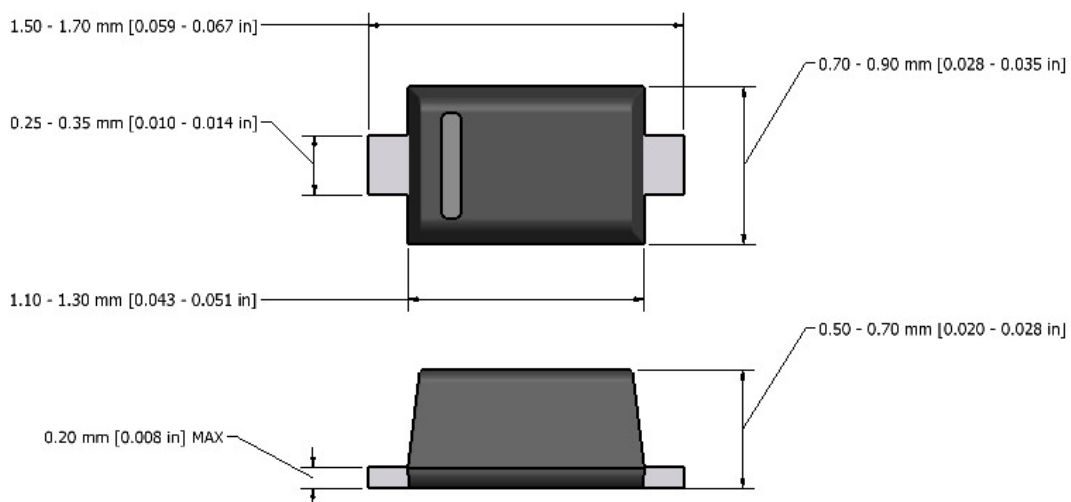

Note: Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.

RESTRICTIONS ON PRODUCT USE

- The information contained herein is subject to change without notice.
- SHIKUES is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing SHIKUES products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such SHIKUES products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that SHIKUES products are used within specified operating ranges as set forth in the most recent SHIKUES products specifications. Also, please keep in mind the precautions and conditions set forth in the “Handling Guide for Semiconductor Devices,” or “SHIKUES PDFs” etc.
- The SHIKUES products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These SHIKUES products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury (“Unintended Usage”). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, all types of safety devices, etc.. Unintended Usage of SHIKUES products listed in this document shall be made at the customer’s own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by SHIKUES for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of SHIKUES or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS & REACH compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. SHIKUES assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.