

#### Features

- Maximum output current is 1.2A
- Range of operation input voltage: Max 15V
- Line regulation: 0.03%/V (typ.)

#### Applications

- Power Management for Computer Mother Board, Graphic Card
- LCD Monitor and LCD TV

- Standby current: 2mA (typ.)
- Load regulation: 0.2%/A (typ.)
- Environment Temperature: -20°C~85°C
- DVD Decode Board
- ADSL Modem
- Post Regulators For Switching Supplies

# **General Description**


AMS1117is a series of low dropout three-terminal regulators with a dropout of 1.3V at 800mA load current. AMS1117features a very low standby current 2mA compared to 5mA of competitor.

Other than a fixed version, Vout = 1.2V, 1.8V, 2.5V, 2.85V, 3.3V, and 5V, AMS1117has an adjustable version, which can provide an output voltage from 1.25 to 12V with only two external resistors.


# AMS1117offers thermal shut down function, to assure the stability of chip and power system. And it uses trimming technique toguarantee output voltage accuracy within 2%. Other output voltage accuracy can be customized on demand, such as 1%.

AMS1117is available in SOT-223, TO-252,SOT-89 power package.

# **Typical Application**

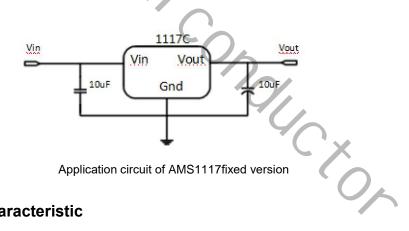

#### **Typical Electrical Characteristic**

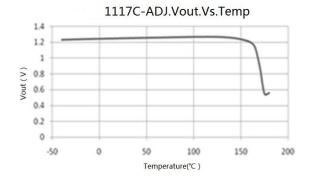

#### Selection Table

Marking	Part No.	Output Voltage	Package
	XX=12	1.2V	
	XX=18	1.8V	
1117	XX=28	2.85V	SOT-223
XXYYWW	XX=25	2.5V	TO-252
	XX=33	3.3V	SOT-89
	XX=50	5.0V	
	XX=AD	Adj	


### Ordering Information

Marking	Designator	Description
1117	1117	Product code
1117 XXYYWW	XX	Output Voltage(1.2~12.0V)
	YYWW	DATE CODE

Note:"XX" stands for output voltages. Other voltages can be specially customized


Parameters	Description
Temperature&Rohs	C:-40∼85℃, Pb Free Rohs Std.
Package type	L:SOT-223 O:TO-252
Packing type:	TR:Tape&Reel (Standard)
Voltage accuracy	2%(Customized)

#### **Block Diagram**

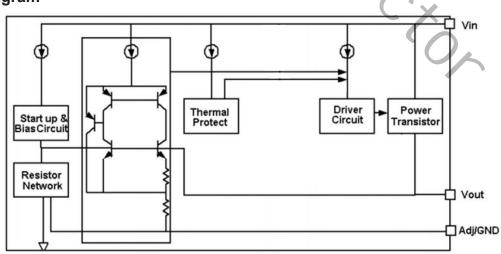

# **Pin Configuration**



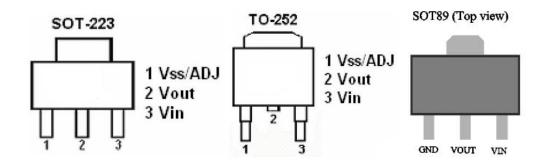

# **Absolute Maximum Ratings**

Max Input Voltage	
Max Operating Junction Temperature(Tj)····································	
Ambient Temperature(Ta) -40 °C ~ 85 °C	
Storage Temperature(Ts)····································	I.
Lead Temperature & Time 260°C 10S	
Caution: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect	t
device reliability.	

# Recommended Work Conditions

Recommended maximum input voltage	15V
Recommended operating junction temperature(Tj)······	<b>-20~125</b> ℃
Thermal Information	

#### **Thermal Information**

Parameter	Package	Rating	Unit
Package thermal resistance	SOT-223	20	°C <b>/W</b>
	TO-252	12.5	°C <b>/W</b>
resistance	SOT89	200	°C/W
		· C	Kon



#### **Electrical Characteristics**

TA=25°C, unless otherwise noted.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Vref	Reference	AMS1117-Adj	1.225	1.25	1.275	V
	voltage	10mA≤lout≤800mA , Vin=3.25V				
		AMS1117-1.2V	1.176	1.2	1.224	V
		0≤lout≤800mA , Vin=3.2V				
		AMS1117-1.8V	1.764	1.8	1.836	V
		0≤lout≤800mA , Vin=3.8V				
		AMS1117-2.5V	2.45	2.5	2.55	V
Vout	Output voltage	0≤lout≤800mA , Vin=4.5V				
		AMS1117-2.85V	2.793	2.85	2.907	V
		0≤lout≤800mA , Vin=4.85V				
		AMS1117-3.3V	3.234	3.3	3.366	V
		0≤lout≤800mA , Vin=5.3V				
		AMS1117-5.0V	4.9	5	5.1	V
		0≤lout≤800mA , Vin=7.0V				

		AMS1117-1.2V	0.03	0.2	%/V
		lout=10mA, 2.7V≤Vin≤10V			
		AMS1117-ADJ	0.03	0.2	%/V
		lout=10mA, 2.75V≤Vin≤12V			
		AMS1117-1.8V	0.03	0.2	%/V
		lout=10mA, 3.3V≤Vin≤12V			
∆Vout	Line	AMS1117-2.5V	0.03	0.2	%/V
	regulation	lout=10mA, 4.0V≤Vin≤12V			
		AMS1117-2.85V	0.03	0.2	%/V
		lout=10mA, 4.35V≤Vin≤12V	C'x		
		AMS1117-3.3V	0.03	0.2	%/V
		lout=10mA, 4.8V≤Vin≤12V			
		AMS1117-5.0V	0.03	0.2	%/V
		lout=10mA, 6.5V≤Vin≤12V			

		AMS1117-1.2V	2	8	mV
		Vin =2.7V, 10mA≤lout≤800mA			
		AMS1117-ADJ	2	8	mV
		Vin =2.75V, 10mA≤lout≤800mA			
		AMS1117-1.8V	3	12	mV
		Vin =3.3V, 10mA≤lout≤800mA			
∆Vout	Load	AMS1117-2.5V	4	16	mV
	regulation	Vin =4.0V, 10mA≤lout≤800mA			



		AMS1117-2.85V	5	20	mV
		Vin =4.35V, 10mA≤lout≤800mA			
		AMS1117-3.3	6	24	mV
		Vin =4.8V, 10mA≤lout≤800mA			
		AMS1117-5.0	9	36	mV
		Vin =6.5V, 10mA≤lout≤800mA			
Vdrop	Dropout voltage	lout =100mA	1.2	1.3	V
		lout=800mA	1.3	1.5	V
Imin	Minimum load current	AMS1117-ADJ	2	10	mA
	0//	AMS1117-1.2V,Vin=10V	2	5	mA
		AMS1117-1.8V,Vin=12V	2	5	mA
lq	Quiescent	AMS1117-2.5V,Vin=12V	2	5	mA
	Current	AMS1117-2.85V,Vin=12V	2	5	mA
		AMS1117-3.3V,Vin=12V	2	5	mA
		AMS1117-5.0V,Vin=12V	2	5	mA
lAdj	Adjust pin	AMS1117-ADJ	55	120	uA
	current	Vin=5V,10mA≪lout≪800mA			
Ichange	ladj change	AMS1117-ADJ	0.2	10	uA
		Vin=5V,10mA≤lout≤800mA			
ΔV/ΔΤ	Temperature		±100		ppm
	coefficien				
θ JC	Thermal	SOT-223	20		
↓ JC	resistance	TO-252	10		°C/W

Note1: All test are conducted under ambient temperature 25°C and within a short period of time 20ms

Note2: Load current smaller than minimum load current of AMS1117-ADJ will lead to unstable or oscillation output.

° O



#### **Detailed Description**

AMS1117is a series of low dropout voltage, three terminal regulators. Its application circuit is very simple: the fixed version only needs two capacitors and the adjustable version only needs two resistors and two capacitors to work. It is composed of some modules including start-up circuit, bias circuit, bandgap, thermal shutdown, power transistors and its driver circuit and so on.

The thermal shut down modules can assure chip and its application system working safety when the junction temperature is larger than 140°C.

The bandgap module provides stable reference voltage, whose temperature coefficient is compensated by careful design considerations. The temperature coefficient is under 100 ppm/°C. And the accuracy of output voltage is guaranteed by trimming technique.

#### Typical Application


AMS1117has an adjustable version and six fixed versions (1.2V, 1.8V, 2.5V, 2.85V, 3.3V and 5V) **Fixed Output Voltage Version** 

# Vin Vout 10uF Gnd 10uF

Application circuit of AMS1117fixed version

- 1) Recommend using 10uF tan capacitor as bypass capacitor (C1) for all application circuit.
- 2) Recommend using 10uF tan capacitor to assure circuit stability.

#### Adjustable Output Voltage Version

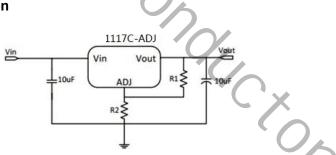

Application Circuit of AMS1117-ADJ

The output voltage of adjustable version follows the equation: Vout= $1.25 \times (1+R2/R1)+IAdj\times R2$ . We can ignore IAdj because IAdj (about 50uA) is much less than the current of R1 (about 2~10mA).


1) To meet the minimum load current (>10mA) requirement, R1 is recommended to be 125ohm or lower. As HS1117C-ADJ can keep itself stable at load current about 2mA, R1 is not allowed to be higher than 625ohm.

2) Using a bypass capacitor ( $C_{ADJ}$ ) between the ADJ pin and ground can improve ripple rejection. This bypass capacitor prevents ripple from being amplified as the output voltage is increased. The impedance of  $C_{ADJ}$  should be less than R1 to prevent ripple from being amplified. As R1 is normally in the range of  $100\Omega$ ~500 $\Omega$ , the value of  $C_{ADJ}$  should satisfy this equation:  $1/(2\pi \times f_{ripple} \times C_{ADJ})$ <R1.

#### Thermal Considerations




We have to take heat dissipation into great consideration when output current or differential voltage of input and output voltage is large. Because in such cases, the power dissipation consumed by AMS1117is very large. AMS1117 seriesuses SOT-223 package type and its thermal resistance is about  $20^{\circ}$ C/W. And the copper area of application board can affect the total thermal resistance. If copper area is 5cm\*5cm (two sides), the resistance is about  $30^{\circ}$ C/W. So the total thermal resistance is about  $20^{\circ}$ C/W +  $30^{\circ}$ C/W. We can decrease total thermal resistance by increasing copper area in application board. When there is no good heat dissipation copper are in PCB, the total thermal resistance will be as high as  $120^{\circ}$ C/W, then the power dissipation of AMS1117could allow on itself is less than 1W. And furthermore, AMS1117will work at junction temperature higher than  $125^{\circ}$ C under such condition and no lifetime is guaranteed.

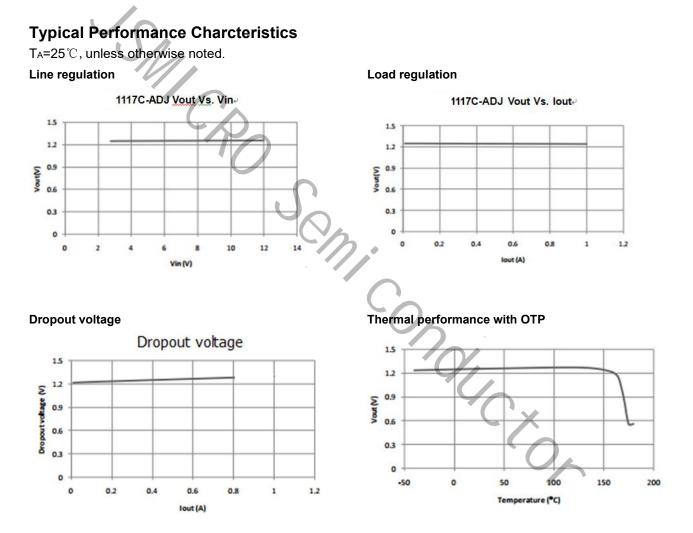




# Package Information

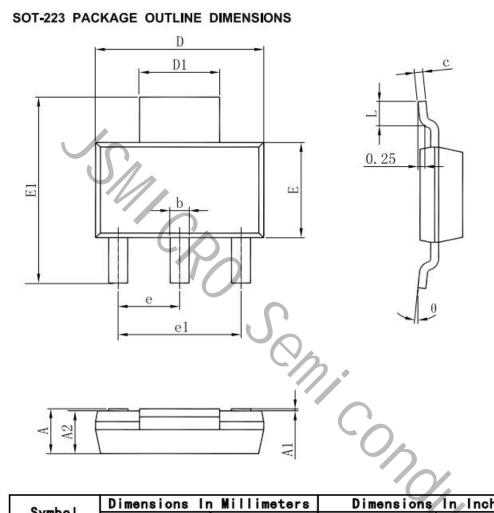

Cumber I	Dimensions Ir	n Millimeters	s Dimensions In Inches		
Symbol	Min	Max	Min	Max	
Α	1.520	1.800	0.060	0.071	
A1	0.000	0.100	0.000	0.004	
A2	1.500	1.700	0.059	0.067	
b	0.660	0.820	0.026	0.032	
С	0.250	0.350	0.010	0.014	
D	6.200	6.400	0.244	0.252	
D1	2.900	3.100	0.114	0.122	
E	3.300	3.700	0.130	0.146	
E1	6.830	7.070	0.269	0.278	
е	2.300	(BSC)	0.091	(BSC)	
e1	4.500	4.700	0.177	0.185	
L	0.900	1.150	0.035	0.045	
θ	0°	10°	0°	10°	




#### TO-252-2L PACKAGE OUTLINE DIMENSIONS

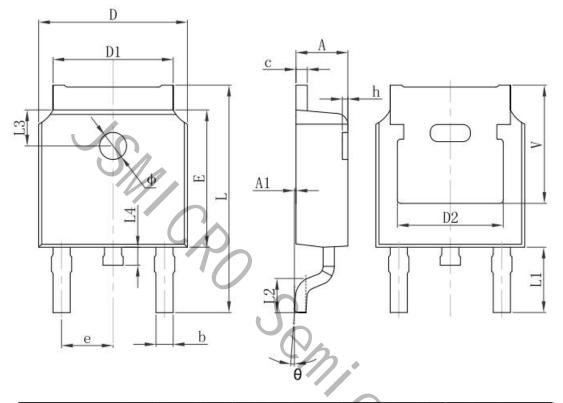

Cumhal	Dimensions	In Millimeters	Dimension	s In Inches
Symbol	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
С	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0,264
D1	5.100	5.460	0.201	0.215
D2	4.830	REF.	0.190	REF.
E	6.000	6.200	0.236	0.244
е	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900	REF.	0.114	REF.
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063	REF.
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	<b>0</b> °	8°
h	0.000	0.300	0.000	0.012
V	5.350	REF.	0.211	REF.



#### 3-pin SOT89 Outline Dimensions

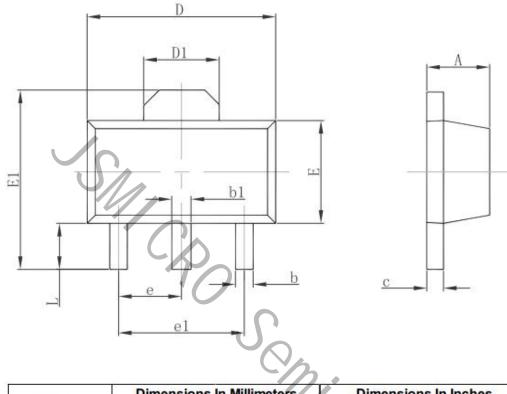

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
С	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
е	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047