



E3T Miniature Photoelectric Sensors



Ultra-Compact E3T Sensors with Visible Red Beam Fit and Perform Where Other Sensors Won't

- » Ultra-Slim
- » Easy to Use
- » Powerful Technology
- » Five Different Sensing Types to Choose From

Automation...simple...powerful.

E3T PHOTOELECTRIC

Omron's E3T sensors offer an ideal detecting solution when space is at a minimum and yet a high power, pinpoint LED is needed for a wide variety of applications.

- **Compact Size** – Side view model dimensions: 18.5 H x 7 W x 9.5 D mm;
Flat model dimensions: 19 H x 12 W x 3.5 D mm
- **Visible Red beam** simplifies alignment for installation and servicing
- **Highly visible indicators** for ease of operation
- **One-chip photo IC** ensures highly reliable detection
- **Capable of detecting extremely small targets** with 0.8 mm dia. pinpoint beam on convergent beam E3T-SL
- **Coaxial retro-reflective** model uses Omron's unique Fee Angle Optics to detect 2 mm objects at 100 mm
- **IP67 enclosure** rating for water washdown
- Separate Light-ON or Dark-ON operation models available
- All models pre-wired with 2 m cable
- Robotic cable versions available
- Ecological: RoHS compliant


Through-beam Models (Side View E3T-ST/Flat E3T-FT)

- Long-distance detection—Side-view Models: 1 m,
Flat Models: 500 mm
- 300-mm Side-view and Flat models are also available to prevent mutual interference.
- Minimum detection object: 0.5 mm dia. (with slit attached)
- Optical axis accuracy of $\pm 2^\circ$ for installation reliability.
- Easily distinguish between color-coded Emitter and Receiver lenses.




Convergent-reflective Models (Side-view E3T-SL)

- Minimum detection object: 0.15 mm dia.
- Resistant to background and surrounding metal

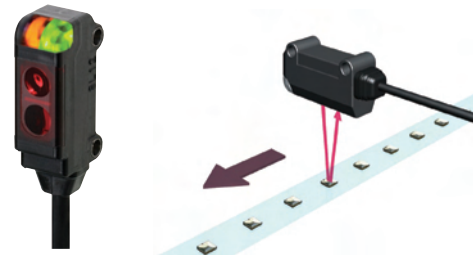

Diffuse-reflective Models (Flat E3T-FD)

- Minimum detection object: 0.15 mm dia.
- Only 3.5 mm wide for installation in small gaps.

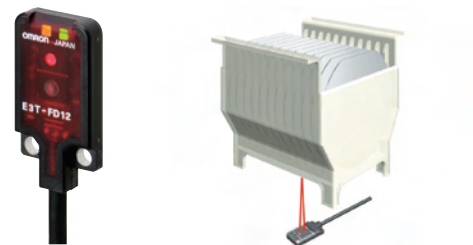


Retro-reflective Models (Side-view E3T-SR) *Twin-lens Optical System

Two models for optimized sensing characteristics with their reflectors.

E3T-SR2□: Sensing distance: 200 mm with E39-R4

E3T-SR3□: Sensing distance: 100 mm with E39-R37

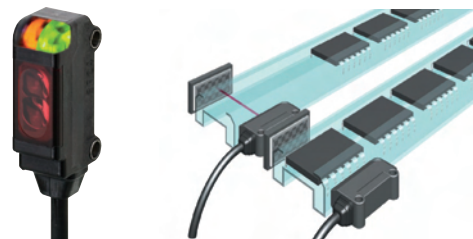


The Slimmest Background Suppression (BGS) Reflective Photoelectric Sensors in the World


OMRON provides BGS performance sharper than the convergent-reflective sensors.

For example, the E3T-FL1□ can stably detect a black object at 12 mm, including sensing distance variations, without being affected by a white background at 20 mm.


Ultra slim at 3.5 mm, black/white error of only 15%, hysteresis of 0.5 mm max. (E3T-FL1□), and sensing capability to 2 mm or less (E3T-FL2□).

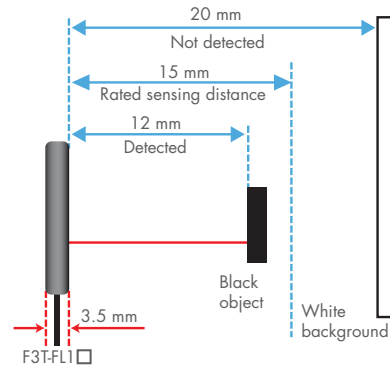

Dramatic Improvement in Black/White Error

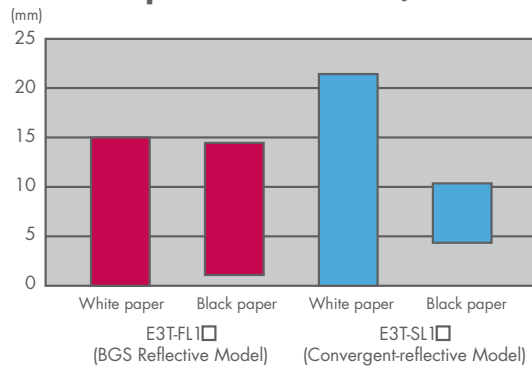

Application Detecting Passage or Accumulation of Parts on a Feeder

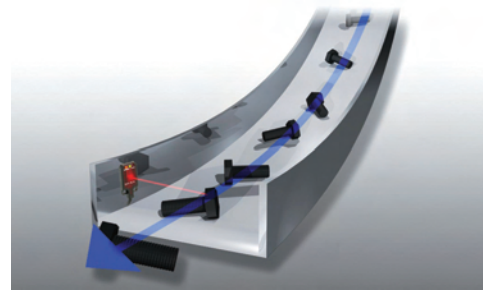

Specifications

E3T Specifications	
Voltage Range	12 to 24 VDC
Load rating	NPN or PNP open collector, 50 mA max.
Operation	Separate models for Light-ON or Dark-ON
Light Source (wavelength)	Red LED (650 nm)
Current consumption (max.)	Emitter: 10 mA ; Receiver 20 mA (through-beam) All others: 20 mA (all others)
Response time	1 ms max.
Circuit protection	Power source reverse polarity (all) Output reverse polarity (all) Output short-circuit (all) Mutual interference (reflective models)
Directional angle	2° to 20° (through-beam emitter, retro-reflective) 2° to 70° (through-beam receiver) 3° to 25° (flat through-beam)
Differential distance	6 mm (flat diffuse, side convergent) 2 mm (side convergent E3T-SL1) 0.5 mm (E3T-FL1 BGS reflective) 2 mm (E3T-FL2 BGS reflective)
Black/white error	15% max. (BGS reflective)
Operating ambient	-25°C to 55°C, 35% to 85% RH
Enclosure rating	IP67
Connection	2 m cable (all models)
Dimensions	Flat: 19 H x 12 W x 3.5 D mm Side-view: 18.5 H x 7 W x 9.5 D mm

Sensors

Red light

Sensing method	Appearance		Connection method	Sensing distance	Operation mode	Model	
						NPN output	PNP output
Through-beam		Side-view 	Pre-wired	1 m (Sensitivity Adjustment Unit can be used.)	Light-ON	E3T-ST11 *2	E3T-ST13
				Dark-ON	E3T-ST12 *2	E3T-ST14	
	300 mm 	Light-ON		E3T-ST21	E3T-ST23		
		Dark-ON		E3T-ST22	E3T-ST24		
	500 mm 	Light-ON		E3T-FT11 *2	E3T-FT13		
		Dark-ON		E3T-FT12 *2	E3T-FT14		
300 mm 	Light-ON	E3T-FT21	E3T-FT23				
	Dark-ON	E3T-FT22	E3T-FT24				
NEW Retro-reflective		Side-view 	Pre-wired	10 to 200 mm includes E39-R4 reflector 	Light-ON	E3T-SR21 *2	E3T-SR23
					Dark-ON	E3T-SR22 *2	E3T-SR24
		Side-view 		10 to 100 mm includes E39-R37 reflector 	Light-ON	E3T-SR31 *2	E3T-SR33
					Dark-ON	E3T-SR32 *2	E3T-SR34
Diffuse-reflective		Flat 	Pre-wired	5 to 30 mm 	Light-ON	E3T-FD11 *2	E3T-FD13
					Dark-ON	E3T-FD12 *2	E3T-FD14
Convergent-reflective		Side-view 		5 to 15 mm 	Light-ON	E3T-SL11 *2	E3T-SL13
					Dark-ON	E3T-SL12 *2	E3T-SL14
			5 to 30 mm 	Light-ON	E3T-SL21 *2	E3T-SL23	
				Dark-ON	E3T-SL22 *2	E3T-SL24	
NEW BGS reflective		Flat 	Pre-wired	1 to 15 mm 	Light-ON	E3T-FL11 *2	E3T-FL13
					Dark-ON	E3T-FL12 *2	E3T-FL14
				1 to 30 mm 	Light-ON	E3T-FL21 *2	E3T-FL23
					Dark-ON	E3T-FL22 *2	E3T-FL24

Notes:

1. Retroreflective sensors include a reflector optimized for sensing characteristics.
2. Robotics cable is an available option for models marked with *2. To order add an "R" suffix. (Example: E3T-ST11R)



OMRON ELECTRONICS LLC • THE AMERICAS HEADQUARTERS • Schaumburg, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron.ca

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ELECTRONICS MEXICO SA DE CV • HEAD OFFICE

Apodaca, N.L. • 52.811.156.99.10 • mela@omron.com