










# Innovative Engineering Solutions

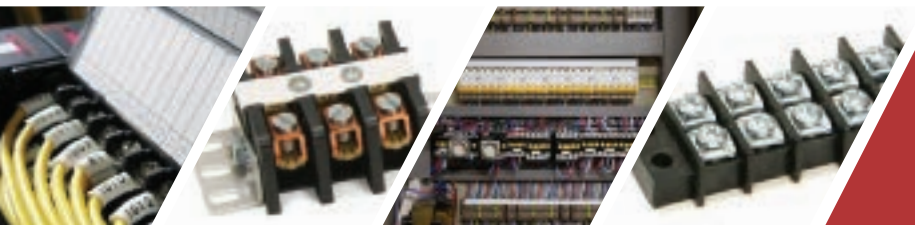





## BARRIER STYLE



	SE	32500	3700/3800	CB/CFT	4300	GFT/GB
<b>SINGLE ROW</b>						
<b>Spacing:</b>	.25" (9.52mm)	.325" (8.25mm)	.375" (9.52mm)	.375" (9.52mm)	.4375" (11.11mm)	.4375" (11.11mm)
<b>No. of Terminals:</b>	1 to 192	1 to 164	1 to 26	1 to 26	1 to 26	1 to 26
<b>Mounting:</b>	Feed Thru, PCB, Base	Feed Thru, PCB, Base, Wire Wrap, Turret, Right Angle	PCB, Turret, Quick Connect, Wire Wrap	PCB, Turret, Quick Connect, Wire Wrap, Right Angle	PCB, Turret, Quick Connect, Wire Wrap, Base	PCB, Turret, Quick Connect, Base
<b>Style:</b>	Open Back	Open Back	Open Back	Closed Back	Open Back	Closed Back
<b>Voltage:</b>	250V	300V	300V	125 – 600V	600V	300V
<b>Current Rating:</b>	5 AMP	15 AMP	20 AMP	20 AMP	20 AMP	20 AMP
<b>Wire Range:</b>	22 to 16 AWG	22 to 14 AWG	22 to 12 AWG	22 to 12 AWG	22 to 12 AWG	22 to 12 AWG
<b>Temperature:</b>	100° C (230° F)	105° C (221° F)	105° C (221° F)	140° C (284° F)	105° C (221° F)	150° C (302° F)
<b>Material:</b>	Polyphenylene	Polypropylene	Polypropylene	Thermoplastic Polyester	Polypropylene	Thermoplastic/ Phenolic
<b>Agency:</b>	UL, CSA	UL, CSA	UL, CSA	UL, CSA	UL, CSA	UL, CSA


## BARRIER STYLE

	1500	2000	M	5600
<b>DOUBLE ROW</b>				
<b>Spacing:</b>	.375" (9.52mm)	.4375" (11.11mm)	.5" (12.7mm)	.562" (14.29mm)
<b>No. of Terminals:</b>	1 to 22	1 to 26	1 to 22	1 to 24
<b>Mounting:</b>	Base, PCB	Base, PCB	Base	Base
<b>Style:</b>	Closed Back	Closed Back	Closed Back	Closed Back
<b>Voltage:</b>	150V – 300V	150V – 300V	600V	600V
<b>Current Rating:</b>	15 – 20 AMP	20 – 30 AMP	50 AMP	40 – 50 AMP
<b>Wire Range:</b>	22 to 12 AWG	22 to 10 AWG	22 to 8 AWG	22 to 8 AWG
<b>Temperature:</b>	110° C (230° F)	110° C (230° F)	150° C (302° F)	150° C (302° F)
<b>Material:</b>	Polyphenylene Oxide	Polyphenylene Oxide	Phenolic	Phenolic
<b>Agency:</b>	UL, CSA	UL, CSA	UL, CSA, CE	UL, CSA

# Curtis Industries

RELAY SOCKETS				
	RS 8 & 11	RS 2, 4 & 6	RS 12 & 16	RS 14 & 15
				
<b>Spacing:</b>	8 & 11	10 & 16	12	14 & 15
<b>Mounting:</b>	Track	Track	Track	Track
<b>Style:</b>	8 & 11 Pin Octal Receptacle	10, 16 & 22 Pin Square Receptacle	8 & 11 Pin Square Receptacle	14 & 15 Pin Square Receptacle
<b>Relay Type:</b>	2 & 3 ODT Relay or Timer	2, 4 & 6 PDT Relay with Latching Coils	2 & 3 PDT Relays	4 DPDT Relay
<b>Voltage:</b>	250V	125V	250V	125V
<b>Current Rating:</b>	10 AMP	5 AMP	10 AMP	5 AMP
<b>Wire Range:</b>	22 to 12 AWG	22 to 16 AWG	22 to 12 AWG	22 to 16 AWG
<b>Temperature:</b>	110° C (230° F)	110° C (230° F)	110° C (230° F)	110° C (230° F)
<b>Material:</b>	Thermoplastic	Thermoplastic	Thermoplastic	Thermoplastic
<b>Agency:</b>	UL, CSA	UL, CSA	UL, CSA	UL, CSA

RELAY SOCKETS		
	CUS 8	CUS 5, 12 & 16
		
<b>Mounting:</b>	Track/Surface	Track/Surface
<b>Relay Type:</b>	8 Pin Octal Receptacle	5, 12 & 16 Pin Square Receptacle
<b>Sockets:</b>	2 PDT Relay or Timer	SPDT, 2 & 3 Relay
<b>Voltage:</b>	300V	250V
<b>Current Rating:</b>	10 AMP	15 AMP
<b>Wire Range:</b>	22 to 12 AWG	22 to 14 AWG
<b>Temperature:</b>	110° C (230° F)	110° C (230° F)
<b>Material:</b>	Thermoplastic	Thermoplastic
<b>Agency:</b>	UL, CSA	UL, CSA



For more detailed specifications visit our website at [www.curtisind.com](http://www.curtisind.com)












**Curtis Industries**


A Div. of Powers Holdings, Inc.




## BARRIER STYLE

	SW/DSW	W/DW	CDM/CT	7100	H/BT	T/U	L	O	S
<b>HIGH VOLTAGE</b>									
<b>Spacing:</b>	.375" (9.52mm)	.4375" (11.11mm)	.546875" (13.86mm)	.629" (15.98mm)	.652" (16.56mm)	1.16" (29.46mm)	1.16" (29.46mm)	1.86" (47.24mm)	2.42" (61.47mm)
<b>No. of Terminals:</b>	1 to 192	1 to 164	1 to 50	2, 3, 5, & 6	1 to 30	T 1 to 6 / U 1 to 4	1 to 12	1 to 4	1 to 4
<b>Mounting:</b>	Track	Track	Base	Base	Base	Base	Base	Base	Base
<b>Style:</b>	Closed Back	Closed Back	Closed Back	Closed Back	Closed Back	Closed Back	Closed Back	Closed Back	Closed Back
<b>Voltage:</b>	600V	600V	600V	600V	600V	600V	600V	600V	600V
<b>Current Rating:</b>	25 – 50 AMP	75 AMP	30 AMP	86 AMP	30 & 75 AMP	125 & 250 AMP	100 AMP	125 AMP	225 AMP
<b>Wire Range:</b>	22 to 8 AWG	22 to 8 AWG	22 to 10 AWG	22 to 2 AWG	16 to 4 AWG	6 to 1/0 AWG	1 AWG	1/0 AWG	4/0 AWG
<b>Temperature:</b>	125° C (257° F)	150° C (302° F)	130° C (266° F)	140° C (284° F)	130° C (266° F)	150° C (302° F)	150° C (302° F)	150° C (302° F)	150° C (302° F)
<b>Material:</b>	Polyamide	Phenolic	Thermoplastic Polyester	Reinforced PBT Polyester	Thermoplastic Polyester	Phenolic	Phenolic	Phenolic	Phenolic
<b>Agency:</b>	UL, CSA	UL, CSA	UL, CSA	UL, CSA	UL, CSA	UL, CSA	UL, CSA	UL, CSA	UL, CSA

## PCB EXTRUDED SUPPORTS

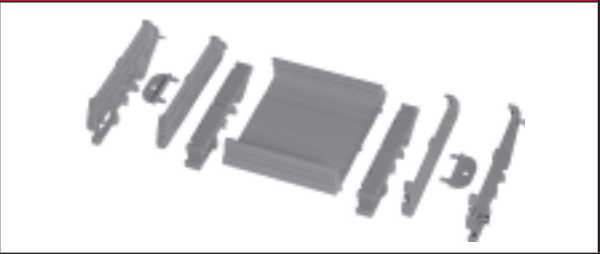



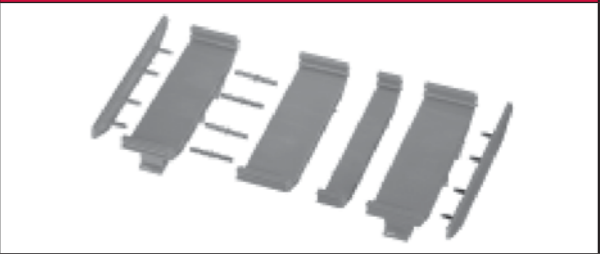




## PCB MODULAR SUPPORTS







## DIN RAIL BOXES



## DIN RAIL

	Single Level	Dual Level	Triple Level	Ground	Screwless	Fuse Block	DIN Ground
							
<b>Spacing:</b>	5 – 26mm	6mm	5.3mm	5, 6 & 8mm	5 & 8mm	10mm	6 – 16mm
<b>Wire Cross Section:</b>	2.5 – 70mm	4 – 6mm	2.5mm	2.5 – 6mm	2.5 – 8mm	11/4 – 5mm	4 – 35mm
<b>Mounting:</b>	Din Track	Din Track	Din Track	Din Track	Din Track	Din Track	Din Track
<b>Style:</b>	Screw	Screw	Screw	Screwless	Screwless	Screw	Screw
<b>Voltage:</b>	800V	600V	250V		600V	600V	300V
<b>Current Rating:</b>	24 – 80A	30A	24A		20A	15 – 30A	N/A
<b>Wire Range:</b>	24 – 10AWG	24 – 10AWG	26 – 14AWG	24 – 8AWG	24 – 8AWG		24 – 4 AWG
<b>Temperature:</b>	125° C	125° C	125° C		125° C	125° C	125° C
<b>Material:</b>	Thermoplastic Polyamide	Thermoplastic Polyamide	Thermoplastic Polyamide	Thermoplastic Polyamide	Thermoplastic Polyamide	Thermoplastic Polyamide	Thermoplastic Polyamide
<b>Agency:</b>	UL, CSA, VDE	UL, CSA, VDE	UL, CSA, VDE	UL, CSA, VDE	UL, CSA, VDE	UL, CSA, VDE	UL, CSA, VDE

## PC BOARD MOUNT

	91 Series	92 Series	93 Series	94 Series
	PBC Mount	PCB Mount	Female Connectors	Male Connectors
				
<b>Spacing:</b>	2.5 – 10mm	5 – 10mm	3.5 – 10mm	2 – 25mm
<b>No. of Terminals:</b>	2 to 25	2 to 25	2 to 25	2 to 25
<b>Mounting:</b>	Screw & Screwless	Screw	Screw	Screw
<b>Style:</b>	Mini, Low, Medium & High Height	Low, Medium & High Height	Modular & Side Stacking	Various
<b>Voltage:</b>	300 – 750V	300 – 750V	250 – 750V	300 – 750V
<b>Current Rating:</b>	12 – 41 AMP	17.5 – 32 AMP	10 – 15 AMP	13.5 – 15 AMP
<b>Wire Range:</b>	30 to 10 AWG	30 to 11 AWG	30 to 12 AWG	30 to 12 AWG
<b>Temperature:</b>	110° C (230° F)	110° C (230° F)	110° C (230° F)	110° C (230° F)
<b>Material:</b>	V-0 Self Extinguishing	V-0 Self Extinguishing	V-0 Self Extinguishing	V-0 Self Extinguishing
<b>Agency:</b>	UL, CSA, VDE, CE	UL, CSA, VDE, CE	UL, CSA, VDE, CE	UL, CSA, VDE, CE



# Family of Products

- > RFI Filters
- > Filtered Power Entry
- > Custom Filters
- > Terminal Blocks
- > Custom Terminal Blocks
- > Liquid Level Controllers
- > PCB Mount Blocks
- > DIN Rail

