



wiha 
Premium Tools

TorqueControl Screwdrivers



Professional TorqueControl



Wiha Adjustable TorqueControl Tools

Wiha TorqueControl Screwdrivers

- TorqueFix factory preset torque
- TorqueVario adjustable torque drivers

molded cushion grip two component handles allow for maximum achievable torque to be reached with comfort.

Precise repeatability!

All TorqueFix & TorqueVario tools are tested and comply with:

- EN ISO 6798
- BS EN 26789
- ASME B107.14M

Each tool has unique serial number and certificate of calibration

Whether it's TorqueVario-S or TorqueFix - Wiha has a torque screwdriver to cover almost every application



+/-6% accuracy tolerance
Certificate of calibration



Direct Reading Scale

+/-6% accuracy tolerance
Certificate of calibration

285 TorqueFix, With Wiha-SoftFinish® Handle

Fixed Torque value pre-set. Tested in accordance with EN ISO 6798, BS EN 26789, ASME B107.14M, tolerance +/- 6%. Audible and perceptible click when pre-set torque has been attained.

Automatically resets for next torque cycle; 50% greater reverse torque.

Item No.	Pre-Sets		Torque				pkg.
	oz.	lbs.	Nm	mm	Inch	lbs.	
285 03	80	5	0.56	112	4.4	.16	1
285 05	120	7.5	0.84	112	4.4	.15	1
285 07	160	10	1.12	119	4.7	.28	1
285 09	200	12.5	1.41	119	4.7	.27	1
285 11	240	15	1.69	119	4.7	.27	1
285 13	320	20	2.25	119	4.7	.28	1
285 15	400	25	2.82	126	4.9	.37	1
285 17	480	30	3.39	126	4.9	.37	1
285 18	560	35	3.95	126	4.9	.37	1
285 19	640	40	4.52	126	4.9	.37	1
285 21	800	50	5.65	132	5.2	.52	1
285 23	960	60	6.78	132	5.2	.52	1
285 25	1120	70	7.91	132	5.2	.52	1

285 Adjustable TorqueVario With Direct Reading Scale

EN ISO 6798, BS EN 26789, ASME B107.14M. Ergonomic molded multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when the torque setting has been attained, automatically resets for next torque cycle.

Item No.	Range		Torque			
	Inch	lbs.	Increments	mm	lbs.	
285 01*	15 - 80	(in/oz)	2.5 Inch oz	122 - 127	.22	1
285 02	5 - 10		.5 Inch lbs	122 - 127	.41	1
285 04	7.5 - 20		.5 Inch lbs	126 - 131	.50	1
285 06	10 - 50		2 Inch lbs	133 - 138	.59	1
285 08	20 - 70		2 Inch lbs	137 - 142	.74	1

Above includes Micro Bit Holder 285583 See 4mm Micro Bits on Page 5
* +/- 10% (This unit only)



+/-6% accuracy tolerance
Certificate of calibration

285 Adjustable TorqueVario-S Handle - In Newton Meter Scale

EN ISO 6798, BS EN 26789, ASME B107.14M. Ergonomic molded multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when the torque setting has been attained, automatically resets for next torque cycle.

Item No.	Newton		Torque		
	Meter Scale	Increments	mm	lbs.	pkg.
285 50*	0.1 - 0.6Nm	.02 Nm	122 - 127	.35	1
285 51	0.4 - 1.0Nm	.05 Nm	122 - 127	.35	1
285 52	0.8 - 2.0Nm	.05 Nm	126 - 131	.45	1
285 53	1.0 - 5.0Nm	.20 Nm	133 - 138	.55	1
285 54	2.0 - 8.0Nm	.25 Nm	137 - 142	.70	1

* +/- 10% (This unit only)



All TorqueVario models include Torque setting adjustment tool



Wiha TorqueControl Blades - For Easy Torque, TorqueFix & TorqueVario Handles



285 Slotted Interchangeable Blades For TorqueFix & TorqueVario
Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item	⊖	⊖	≡	↔	Max. Torque	▬
No.	mm	Inch	mm	lbs.	Nm	pkg.
285 34	1.5	.059	175	.07	0.15	1
285 35	2.0	.078	175	.07	0.4	1
285 36	2.5	.098	175	.07	0.4	1
285 37	3.0	.118	175	.07	0.6	1
285 38	3.5	.139	175	.07	1.1	1
285 39	4.0	.157	175	.07	2.5	1



285 Phillips Interchangeable Blades For TorqueFix & TorqueVario
Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item	⊕	≡	⊖	↔	Max. Torque	▬
No.	Size	mm	mm	lbs.	Nm	pkg.
285 40	000	175	4.0	.07	0.4	1
285 41	00	175	4.0	.07	0.4	1
285 42	0	175	4.0	.07	0.4	1
285 43	1	175	4.0	.07	3.8	1
285 44	2	175	4.0	.07		1



285 TORX® Interchangeable Blades For TorqueFix & TorqueVario
TORX® tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item	⊗	≡	⊖	↔	Max. Torque	▬
No.	Size	mm	mm	lbs.	Nm	pkg.
285 61	T5	175	4.0	.07	0.4	1
285 62	T6	175	4.0	.07	0.6	1
285 63	T7	175	4.0	.07	0.9	1
285 64	T8	175	4.0	.07	1.3	1
285 65	T9	175	4.0	.07	2.5	1
285 66	T10	175	4.0	.07	3.8	1
285 67	T15	175	4.0	.07	5.5	1
285 68	T20	175	4.0	.07	8.0	1
285 69	T25	175	4.0	.07	8.0	1



285 TORXPlus® Blades For TorqueFix & TorqueVario
TORXPlus® tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item	⊗	≡	⊖	↔	Max. Torque	▬
No.	Size	mm	mm	lbs.	Nm	pkg.
285 71	IP5	175	4.0	.07	0.5	1
285 72	IP6	175	4.0	.07	0.8	1
285 73	IP7	175	4.0	.07	1.3	1
285 74	IP8	175	4.0	.07	2.0	1
285 75	IP9	175	4.0	.07	3.0	1
285 76	IP10	175	4.0	.07	4.5	1
285 77	IP15	175	4.0	.07	6.6	1
285 78	IP20	175	4.0	.07	8.0	1
285 79	IP25	175	4.0	.07	8.0	1



285 Hex Metric Interchangeable Blades For TorqueFix & TorqueVario
Hex tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item	⬡	≡	↔	Max. Torque	▬
No.	mm	mm	lbs.	Nm	pkg.
285 45	1.5	175	.07	0.9	1
285 46	2.0	175	.07	1.8	1
285 47	2.5	175	.07	3.8	1
285 48	3.0	175	.07	5.5	1
285 49	4.0	175	.07	8.0	1



285 Hex Inch Interchangeable Blades For TorqueFix & TorqueVario
Hex tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item	⬡	≡	↔	Max. Torque	▬
No.	Inch	mm	lbs.	Nm	pkg.
285 55	.050	175	.07	.3	1
285 56	1/16	175	.07	.5	1
285 57	5/64	175	.07	.6	1
285 58	3/32	175	.07	1.3	1
285 59	7/64	175	.07	2.5	1
285 60	1/8	175	.07	3.8	1
285 87	9/64	175	.07	8.0	1
285 88	5/32	175	.07	8.0	1



285 MagicSpring TORX® Interchangeable Blades For TorqueFix & TorqueVario
blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item	⊗	≡	⊖	↔	Max. Torque	▬
No.	Size	mm	mm	lbs.	Nm	pkg.
285 12	T6	175	4.0	.07	0.6	1
285 27	T7	175	4.0	.07	0.9	1
285 28	T8	175	4.0	.07	1.3	1
285 29	T9	175	4.0	.07	2.5	1
285 30	T10	175	4.0	.07	3.8	1
285 31	T15	175	4.0	.07	5.5	1
285 32	T20	175	4.0	.07	8.0	1
285 33	T25	175	4.0	.07	8.0	1



Screw Holding



286 MagicSpring TORXPlus® Interchangeable Blades For TorqueFix & TorqueVario
blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item	⊗	≡	⊖	↔	Max. Torque	▬
No.	Size	mm	mm	lbs.	Nm	pkg.
286 11	IP6	175	4.0	.07	0.8	1
286 12	IP7	175	4.0	.07	1.3	1
286 13	IP8	175	4.0	.07	2.0	1
286 14	IP9	175	4.0	.07	3.0	1
286 16	IP10	175	4.0	.07	4.5	1
286 17	IP15	175	4.0	.07	6.6	1
286 18	IP20	175	4.0	.07	8.0	1
286 19	IP25	175	4.0	.07	8.0	1



Screw Holding

*None of the blades featured on this page will function in a TorqueVario Insulated Handle

Wiha SYSTEM 4 Micro Bits



750 SYSTEM 4 Slotted Bits

High alloy CVM steel, hardened, on 4 mm hex stock.

Item	↓	≡	≡	↵
No.	mm	mm	Inch	lbs.
750 08	0.8	28	1.1	.01
750 12	1.2	28	1.1	.01
750 15	1.5	28	1.1	.01
750 18	1.8	28	1.1	.01
750 20	2.0	28	1.1	.01
750 25	2.5	28	1.1	.01
750 30	3.0	28	1.1	.01
750 35	3.5	28	1.1	.01
750 40	4.0	28	1.1	.01



751 SYSTEM 4 Phillips Bits High alloy chrome-vanadium-molybdenum steel, hardened, on 4 mm hex stock.

Item	+	≡	≡	↵
No.	Size	mm	Inch	lbs.
751 05	000	28	1.1	.01
751 10	00	28	1.1	.01
751 15	0	28	1.1	.01
751 20	1	28	1.1	.01



753 SYSTEM 4 Hex Metric Bits

High alloy CVM steel, hardened, on 4 mm hex stock.

Item	⬡	≡	≡	↵
No.	mm	mm	Inch	lbs.
753 07	0.7	28	1.1	.01
753 09	0.9	28	1.1	.01
753 13	1.3	28	1.1	.01
753 15	1.5	28	1.1	.01
753 20	2.0	28	1.1	.01
753 25	2.5	28	1.1	.01
753 30	3.0	28	1.1	.01
753 40	4.0	28	1.1	.01



753 SYSTEM 4 Hex Inch Bits High alloy chrome-vanadium-molybdenum steel, hardened, on 4 mm hex stock.

Item	⬡	≡	≡	↵
No.	Inch	mm	Inch	lbs.
753 07	.028	28	1.1	.01
753 09	.035	28	1.1	.01
753 13	.050	28	1.1	.01
753 50	1/16	28	1.1	.01
753 52	5/64	28	1.1	.01
753 54	3/32	28	1.1	.01
753 56	7/64	28	1.1	.01
753 58	1/8	28	1.1	.01
753 60	9/64	28	1.1	.01
753 40	5/32	28	1.1	.01



757 SYSTEM 4 TORX® Bits

High alloy CVM steel, hardened, on 4 mm stock.

Item	⬠	≡	≡	↵
No.	Size	mm	Inch	lbs.
757 03	T3	28	1.1	.01
757 04	T4	28	1.1	.01
757 05	T5	28	1.1	.01
757 06	T6	28	1.1	.01
757 07	T7	28	1.1	.01
757 08	T8	28	1.1	.01
757 09	T9	28	1.1	.01
757 10	T10	28	1.1	.01
757 15	T15	28	1.1	.01
757 20	T20	28	1.1	.01



757 SYSTEM 4 TORX® Tamper Resistant Bits

High alloy CVM steel, hardened, on 4 mm stock.

Item	⬠	≡	≡	↵
No.	Size	mm	Inch	lbs.
757 27	T7s	28	1.1	.01
757 28	T8s	28	1.1	.01
757 29	T9s	28	1.1	.01
757 35	T10s	28	1.1	.01
757 39	T15s	28	1.1	.01
757 42	T20s	28	1.1	.01



753 SYSTEM 4 Metric Tamper Resistant Hex Bits

High alloy CVM steel, hardened, on 4 mm hex stock.

Item	⬡	≡	≡	↵
No.	mm	mm	Inch	lbs.
753 22	2.0	28	1.1	.01
753 27	2.5	28	1.1	.01
753 32	3.0	28	1.1	.01
753 42	4.0	28	1.1	.01



753 SYSTEM 4 Tamper Resistant Hex Inch Bits

High alloy CVM steel, hardened, on 4 mm hex stock.

Item	⬡	≡	≡	↵
No.	Inch	mm	Inch	lbs.
753 62	5/64	28	1.1	.01
753 64	3/32	28	1.1	.01
753 66	7/64	28	1.1	.01
753 68	1/8	28	1.1	.01
753 70	9/64	28	1.1	.01
753 72	5/32	28	1.1	.01



285 83 Adapter Blade For Wiha 4mm MicroBits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item	⬡	≡	⬡	↵	≡
No.	Size	mm	mm	lbs.	pkg.
285 83	4.0	149	4.0	.09	1

Wiha Adjustable TorqueControl Tool Sets In Durable Storage Box



With Certificate of Calibration



With Certificate of Calibration

285 90 24 Piece TorqueVario-S Micro-Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool. Packed in a compact durable storage box.

Item No.		
285 90	Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1	lbs.
	TORX® : T6, T7, T8, T9, T10, T15	1.33
	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32	
	28504 - Handle Range 7.5 - 20 Inch lbs.	

285 93 24 Piece TorqueVario-S Micro-Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool. Packed in a compact durable storage box.

Item No.		
285 93	Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1	lbs.
	TORX® : T6, T7, T8, T9, T10, T15	1.33
	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32	
	28501 - Handle Range 15-80 Inch/oz (+/- 10%)	



53 Piece Set

With Certificate of Calibration



59 Piece Set

With Certificate of Calibration

285 95 53 Piece TorqueVario-S Bit Set, In Storage Box

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 50 Insert bits, 1/4" Bit holder and Torque adjustment tool.

Item No.		
285 95	Slotted: 4.5, 5.5, 6.5, 8.0mm	lbs.
	Phillips: #0, #1, #2, #3	2.85
	TORX® : T6, T7, T8, T9, T10, T15, T20, T25, T27, T30	
	Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16"	
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm	
	Pozidriv: #0, #1, #2, #3	
	Torq Set: #4, #5, #6, #8	
	Square: #1, #2, #3	
	Triwing: #0, #1, #2, #3, #4	
	28506 - Handle Range 10 - 50 Inch lbs.	
	28581 - 1/4" Bit Holder	

285 89 59 Piece TorqueVario-S Bit Set, In Storage Box

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes 3 ergonomic multi-component adjustable TorqueVario-S handles, 39 Insert bits, 15 Sockets, 1/4" Bit holder, 1/4" Hex to 1/4" Square adapter and Torque adjustment tool.

Item No.		
285 89	Slotted: 4.5, 5.5, 6.5mm	lbs.
	Phillips: #0, #1, #2	2.58
	TORX® : T5, T6, T7, T8, T9, T10, T15, T20, T25, T30	
	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4"	
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0mm	
	Pozidriv: #1, #2	
	Square: #1, #2, #3	
	Inch Sockets: 1/8, 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8"	
	Metric Sockets: 4.0, 4.5, 5.0, 5.5, 6.0, 7.0, 8.0mm	
	3 Handles: 15-80 Inch/oz., 5-10 & 10-50 Inch lbs.	
	1/4" Bit Holder & 1/4"Hex to 1/4" Square adapter	

Wiha TorqueControl Sets In Durable Canvas Pouch



285 96 8 Piece TorqueControl Set With Slotted & Phillips Blades
Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 6 blades & Torque adjustment tool. Packed in a durable canvas pouch.

Item No.	↔ lbs.
285 96 Slotted: 2.5, 3.0, 3.5, 4.0mm Phillips: #0, #1 28504 - Handle Range 7.5 - 20 Inch lbs.	.95

With Certificate of Calibration



285 99 14 Piece TorqueControl Set With TORX® & TORXPlus® Blades
Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes Ergonomic multi-component adjustable TorqueVario-S handle, 12 blades & Torque adjustment tool. Packed in a durable canvas pouch.

Item No.	↔ lbs.
285 99 TORX® : T7, T8, T9, T10, T15, T20 TORXPlus® : IP7, IP8, IP9, IP10, IP15, IP20 28506 - Handle Range 10 - 50 Inch lbs.	1.25

With Certificate of Calibration



Item No.	↔ lbs.
285 97 8 Piece TorqueControl Set With TORX® Blades Certified to EN ISO 6798, BS EN 26789, ASME B107.14M 285 97 TORX® : T7, T8, T9, T10, T15, T20 28506 - Handle Range 10 - 50 Inch lbs.	1.01

With Certificate of Calibration



Item No.	↔ lbs.
286 90 8 Piece TorqueControl Set With MagicSpring TORXPlus® Screw Holding Blades Certified to EN ISO 6798, BS EN 26789, ASME B107.14M 286 90 MagicSpring TORXPlus® : IP7, IP8, IP9, IP10, IP15, IP20 28506 - Handle Range 10 - 50 Inch lbs.	1.02

With Certificate of Calibration



Item No.	↔ lbs.
285 98 8 Piece TorqueControl Set With TORXPlus® Blades Certified to EN ISO 6798, BS EN 26789, ASME B107.14M 285 98 TORXPlus® : IP7, IP8, IP9, IP10, IP15, IP20 28506 - Handle Range 10 - 50 Inch lbs.	1.00


With Certificate of Calibration






Wiha Insulated TorqueControl Tools



Includes Certificate

285 Insulated TorqueVario-S, With Window Scale Insulation
 **up to 1000 Volt.** EN ISO 6798, BS EN 26789, ASME B107.14M, VDE, ASTM F-1505-01 & NFPA70E, +/- 6% Accuracy. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained.






Item No.	Range				
No.	Inch lbs.	Increments	mm	lbs.	pkg.
285 14	7.5 - 20	.5 Inch lbs	126 - 131	.43	1
285 16	10 - 50	2 Inch lbs	133 - 138	.40	1
285 20	20 - 70	2 Inch lbs	137 - 142	.69	1

Each TorqueVario handle has unique serial number and certificate of calibration



10,000 Volt Tested

287 Insulated Slotted Interchangeable Blades For TorqueVario-S
 Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum tool steel, hardened. VDE Insulated.





Item No.					Max. Torque	
No.	mm	Inch	mm	lbs.	Nm	pkg.
287 01	3.0	.118	220	.07	0.6	1
287 03	3.5	.139	220	.07	1.1	1
287 05	4.0	.157	220	.07	2.5	1
287 07	5.5	.216	220	.07	3.8	1

These Insulated Blades work in Insulated handles only



10,000 Volt Tested

287 Insulated Phillips Interchangeable Blades For TorqueVario-S
 Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum tool steel, hardened. VDE Insulated.

Item No.					Max. Torque	
No.	Size	mm	mm	lbs.	Nm	pkg.
287 10	0	220	4.0	.07	0.9	1
287 11	1	220	4.0	.07	3.8	1
287 12	2	220	4.0	.07	5.5	1

These Insulated Blades work in Insulated handles only


Wiha Insulated TorqueControl Tool Set In Belt Pack Pouch



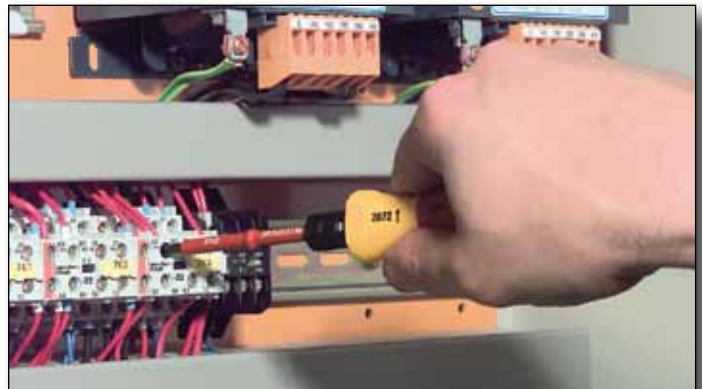
NEW
From Wiha



287 90 7 Piece Insulated TorqueControl Set With Slotted & Phillips Blades Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes Insulated multi-component adjustable TorqueVario-S handle, 6 blades & Torque adjustment tool. In Belt Pack pouch

Item No.		lbs.
287 90	Slotted: 3.5, 4.0, 5.5mm Phillips: #1, #2 28516 - Handle Range 10 - 50 Inch lbs.	.89

With Certificate of Calibration



ESD Safe Adjustable TorqueControl Tools



Includes Certificate

285 ESD Safe TorqueVario-S, With Window Scale

EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6% Accuracy
Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained. With Certificate of accuracy.

Item No.	Range	Increments	mm	lbs.	pkg.
285 22*	15 - 80(in/oz)	2.5 Inch oz	122 - 127	.33	1
285 24	5 - 10	.2 Inch lbs	122 - 127	.34	1
285 26	7.5 - 20	.5 Inch lbs	126 - 131	.42	1

* +/- 10% (This unit only)

Each TorqueVario handle has unique serial number and certificate of calibration



With Certificate of Calibration

285 91 24 Piece ESD Safe Adjustable TorqueVario-S Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.

Item No.	Slotted:	lbs.
285 91	1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1 TORX : T6, T7, T8, T9, T10, T15 Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"	1.31
	28524 - Handle ESD Safe Range 5 - 10 Inch lbs.	

285 92 24 Piece ESD Safe Adjustable TorqueVario-S Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.

Item No.	Slotted:	lbs.
285 92	1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1 TORX : T6, T7, T8, T9, T10, T15 Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"	1.31
	28526 - Handle ESD Safe Range 7.5 - 20 Inch lbs.	



288 ESD Safe Slotted Interchangeable Blades For TorqueVario-S
Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item No.	mm	Inch	mm	lbs.	Max. Torque Nm	pkg.
288 01	1.5	.059	175	.07	0.15	1
288 03	2.0	.078	175	.07	0.4	1
288 05	3.0	.118	175	.07	0.6	1
288 07	3.5	.139	175	.07	1.1	1
288 09	4.0	.157	175	.07	2.5	1



288 ESD Safe Phillips Interchangeable Blades For TorqueVario-S
Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item No.	Size	mm	mm	lbs.	Max. Torque Nm	pkg.
288 10	000	175	4.0	.07	0.4	1
288 12	00	175	4.0	.07	0.4	1
288 14	0	175	4.0	.07	0.9	1
288 16	1	175	4.0	.07	3.8	1



288 ESD Safe TORX® Interchangeable Blades For TorqueVario-S
TORX® tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, hard chromed.

Item No.	Size	mm	mm	lbs.	Max. Torque Nm	pkg.
288 25	T5	175	4.0	.07	0.4	1
288 26	T6	175	4.0	.07	0.6	1
288 27	T7	175	4.0	.07	0.9	1
288 28	T8	175	4.0	.07	1.3	1
288 29	T9	175	4.0	.07	2.5	1
288 30	T10	175	4.0	.07	3.8	1



Packed in a compact durable storage box

With Certificate of Calibration +/- 10%

288 90 24 Piece TorqueVario-S ESD Safe Micro-Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool.

Item No.	Slotted:	Phillips:	lbs.
288 90	1.5, 2.0, 3.0, 4.0mm TORX : T6, T7, T8, T9, T10, T15 Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"	#00, #0, #1	1.33
	28522 - ESD Safe Handle Range 15-80 Inch/oz.		

T-handle TorqueControl Tools



Includes Calibration Certificate

289 TorqueFix T-handle

EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6% Accuracy

Ergonomic multi-component handle, light and compact.

With Certificate of calibration.

Item No.	Torque In-lbs.	Torque Nm	mm x mm	lbs.	pkg.
289 31	53.1	6	56 x 120	.81	1
289 33	70.8	8	56 x 120	.82	1
289 35	88.5	10	56 x 120	.79	1
289 37	106.2	12	56 x 120	.79	1
289 38	110.6	12.5	56 x 120	.80	1
289 39	123.9	14	56 x 120	.80	1

Each TorqueFix T-handle has unique serial number and certificate of calibration



Includes Calibration Certificate

NEW
From Wiha

289 40 Adjustable TorqueVario STplus T-handle

EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6% Accuracy

Ergonomic multi-component handle, light and compact.

Item No.	Torque Nm	Torque In-lbs.	mm x mm	lbs.	pkg.
289 40	5-14	44.3-123.9	56 x 120	.81	1

* (1 Nm 8.8507) (Scale is shown in Nm only)



289 TORX® Interchangeable Blades For TorqueFix T-Handle

TORX® tip blades on 6mm Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, hard chromed.

Item No.	Size	mm	Inch	mm	lbs.	pkg.
289 03	T15	130	5.1	6.0	.10	1
289 04	T20	130	5.1	6.0	.10	1
289 05	T25	130	5.1	6.0	.11	1
289 06	T27	130	5.1	6.0	.11	1
289 07	T30	130	5.1	6.0	.11	1
289 08	T40	130	5.1	6.0	.11	1



289 TORXPlus® Interchangeable Blades For TorqueFix T-Handle

TORXPlus® tip blades on 6mm Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, hard chromed.

Item No.	Size	mm	Inch	mm	lbs.	pkg.
289 10	IP15	130	5.1	6.0	.10	1
289 11	IP20	130	5.1	6.0	.10	1
289 12	IP25	130	5.1	6.0	.11	1
289 13	IP27	130	5.1	6.0	.11	1
289 14	IP30	130	5.1	6.0	.11	1
289 15	IP40	130	5.1	6.0	.11	1



289 Hex Metric Interchangeable Blades For TorqueFix T-Handle

Hex tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item No.	mm	mm	Inch	lbs.	pkg.
289 16	3.0	130	5.1	.11	1
289 17	4.0	130	5.1	.11	1
289 18	5.0	130	5.1	.11	1
289 19	6.0	130	5.1	.11	1



289 Hex Inch Interchangeable Blades For TorqueFix T-Handle

Hex tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.







Item No.	Inch	mm	Inch	lbs.	pkg.
289 20	1/8	130	5.1	.11	1
289 21	9/64	130	5.1	.11	1
289 22	5/32	130	5.1	.11	1
289 23	3/16	130	5.1	.11	1
289 24	7/32	130	5.1	.11	1

Wiha T-handle TorqueControl Adapters



289 TorqueFix Adapter For 1/4" & 3/8" Sockets







Shaft CVM steel, hardened, corrosion protected.

Item						
No.	Size	mm	Inch	mm	lbs.	pkg.
289 26	1/4	100	3.9	6.0	.12	1
289 27	3/8	100	3.9	6.0	.15	1



289 25 TorqueFix Quick Release Bit Holder

Shaft CVM steel, hardened, corrosion protected.






Item						
No.	Size	mm	Inch	mm	lbs.	pkg.
289 25	1/4	125	4.9	6.0	.15	1

Wiha TorqueControl Adapters

Adapters For TorqueFix™ & TorqueVario™








285 81 Bit Holder Adapter For 1/4" Drive Bits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item					
No.	Size	mm	mm	lbs.	pkg.
285 81	1/4	149	4.0	.09	1








285 82 Square Drive Adapter For 1/4" Sockets Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item					
No.	Size	mm	mm	lbs.	pkg.
285 82	1/4	145	4.0	.08	1








285 83 Adapter Blade For Wiha 4mm MicroBits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item					
No.	Size	mm	mm	lbs.	pkg.
285 83	4.0	149	4.0	.09	1



288 82 ESD Safe Bit Holder Adapter For 1/4" Drive Bits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item					
No.	Size	mm	mm	lbs.	pkg.
288 82	1/4	162	4.0	.09	1



See
TorqueControl
Handles
for adapters
on pages 3 & 9

Wiha Easy Torque TORX® & TORXPlus® Tools With Replaceable Blades

“easy” Torque

- Audible Click At Torque
- Replaceable Blades
- +/- 10% Repeatability
- Improve Productivity
- Reduces Waste
- Controls Costs
- Save Time!

Torque accuracy of +/- 10% to 5000 cycles

Economical Torque Control for tooling assembly and repair

Reverse torque is 50% greater for easy removal using same tool

Each tool factory preset



291 Easy Torque Screwdriver Handle With TORXPlus® Blades

Easy Torque value pre-set. Release accuracy +/- 10%. Internal mechanism slips when torque value has been attained. Light weight, comfortable handle for good power transfer.

Item No.	Pre-Sets	Preset			
	Inch/lbs.	Ft./lbs.	Nm	lbs.	pkg.
291 51	IP5 4.4	0.3	0.5	.26	1
291 52	IP6 5.3	0.4	0.6	.26	1
291 53	IP7 8.0	0.7	0.9	.26	1
291 55	IP8 10.6	0.9	1.2	.26	1
291 56	IP9 12.4	1.0	1.4	.26	1
291 57	IP10 17.7	1.5	2.0	.26	1
291 59	IP15 26.6	2.2	3.0	.26	1

* No Calibration Certificates

291 Easy Torque Screwdriver Handle With TORX® Blades

Easy Torque value pre-set. Release accuracy +/- 10%. Internal mechanism slips when torque value has been attained. Light weight, comfortable handle for good power transfer.

Item No.	Pre-Sets	Preset			
	Inch/lbs.	Ft./lbs.	Nm	lbs.	pkg.
291 32	T5 4.4	0.3	0.5	.26	1
291 33	T6 5.3	0.4	0.6	.26	1
291 34	T7 8.0	0.4	0.9	.26	1
291 36	T8 10.6	0.9	1.2	.26	1
291 37	T9 12.4	1.0	1.4	.26	1
291 38	T10 17.7	1.5	2.0	.26	1
291 40	T15 26.6	2.2	3.0	.26	1

* No Calibration Certificates



291 92 5 Piece Easy Torque Handle Set With TORXPlus® Blades

Easy Torque value pre-set. Release accuracy +/- 10%.

Item No.	Size	mm	Size	mm	lbs.		
291 92	291 53	IP7	180	291 57	IP10	180	.65
	291 55	IP8	180	291 59	IP15	180	
	291 56	IP9	180				



291 90 5 Piece Easy Torque Handle Set, With TORX® Blades

Easy Torque value pre-set. Release accuracy +/- 10%.

Item No.	Size	mm	Size	mm	lbs.		
291 90	291 06	T7	180	291 14	T10	180	.65
	291 10	T8	180	291 18	T15	180	
	291 12	T9	180				



Numerical Index by Item Number

Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page
28501	3	28559	4	28810	9	29138	13	75720	5
28502	3	28560	4	28812	9	29140	13	75727	5
28503	3	28561	4	28814	9	29151	13	75728	5
28504	3	28562	4	28816	9	29152	13	75729	5
28505	3	28563	4	28825	9	29153	13	75735	5
28506	3	28564	4	28826	9	29155	13	75739	5
28507	3	28565	4	28827	9	29156	13	75742	5
28508	3	28566	4	28828	9	29157	13		
28509	3	28567	4	28829	9	29159	13		
28511	3	28568	4	28830	9	29190	13		
28512	4	28569	4	28882	11	29192	13		
28513	3	28571	4	28890	9	75008	5		
28514	8	28572	4	28903	10	75012	5		
28515	3	28573	4	28904	10	75015	5		
28516	8	28574	4	28905	10	75018	5		
28517	3	28575	4	28906	10	75020	5		
28518	3	28576	4	28907	10	75025	5		
28519	3	28577	4	28908	10	75030	5		
28520	8	28578	4	28910	10	75035	5		
28521	3	28579	4	28911	10	75040	5		
28522	9	28581	11	28912	10	75105	5		
28523	3	28582	11	28913	10	75110	5		
28524	9	28583	5,11	28914	10	75115	5		
28525	3	28587	4	28915	10	75120	5		
28526	9	28588	4	28916	10	75307	5		
28527	4	28589	6	28917	10	75309	5		
28528	4	28590	6	28918	10	75313	5		
28529	4	28591	9	28919	10	75315	5		
28530	4	28592	9	28920	10	75320	5		
28531	4	28593	6	28921	10	75322	5		
28532	4	28595	6	28922	10	75325	5		
28533	4	28596	7	28923	10	75327	5		
28534	4	28597	7	28924	10	75330	5		
28535	4	28598	7	28925	11	75332	5		
28536	4	28599	7	28926	11	75340	5		
28537	4	28611	4	28927	11	75342	5		
28538	4	28612	4	28931	10	75350	5		
28539	4	28613	4	28933	10	75352	5		
28540	4	28614	4	28935	10	75354	5		
28541	4	28616	4	28937	10	75356	5		
28542	4	28617	4	28938	10	75358	5		
28543	4	28618	4	28939	10	75360	5		
28544	4	28619	4	28940	10	75362	5		
28545	4	28690	7	29102	12	75364	5		
28546	4	28701	8	29104	12	75366	5		
28547	4	28703	8	29106	12	75368	5		
28548	4	28705	8	29108	12	75370	5		
28549	4	28707	8	29110	12	75372	5		
28550	3	28710	8	29112	12	75703	5		
28551	3	28711	8	29114	12	75704	5		
28552	3	28712	8	29116	12	75705	5		
28553	3	28790	8	29118	12	75706	5		
28554	3	28801	9	29132	13	75707	5		
28555	4	28803	9	29133	13	75708	5		
28556	4	28805	9	29134	13	75709	5		
28557	4	28807	9	29136	13	75710	5		
28558	4	28809	9	29137	13	75715	5		

wiha



Premium Tools

(800) 494-6104

fax: (800) 494-7456

email: cservice@wihatools.com



Catalog Item No. 99001.wo
version - 7/1/10

Subject to change
without notice

©2010 Willi Hahn
Corporation

@Torx is a registered
trademark of camcar/textron



Wiha Quality Tools

1348 Dundas Circle
Monticello, MN 55362
tel: 763.295.6591
fax: 763.295.6598

Wiha Tools Canada Ltd.

www.wihatools.ca
Brampton, ONT L6T 4X4
tel: 763.295.6591
fax: 763.295.6598

To:

Coming soon...



99951.wo - Bits Catalog



99002.wo - Screwdrivers Catalog

Also
available...



99919.wo - Insulated Catalog



99934.wo - Hex Tools Catalog



99945.wo - ESD Catalog



99914.wo - TORX Catalog



99977.wo - Pliers/Crimpers Catalog