

Base Mount Double Row Terminal Blocks

Series KU

Specifications

Description: Base mount double row terminal blocks.

Ratings:

Volts: — 600V

Amps: — 60A*

Center Spacing: 0.625" (15.88mm)

Number of Poles: 2- to 12-poles

Wire Range: #6-22 AWG Cu

Screw Size: #10-32

Torque Rating: 20 lb-in.

Distance Between Barriers: 0.437" (11.09mm)

Mounting: Base mount

Material: Molded base: Black, UL rated 94V1 Nuclear Grade Noryl

Terminal plating: Nickel over brass

Operating Temperature: 105°C max.


Agency Information: UL File E62622, CSA File 47235

* 60A rating achieved with #6 copper wire crimped to ring terminal.


Dimensions - in

Poles	KU		KUX Only
	A	B	A
02	2.50	1.62	2.00
03	3.12	2.25	2.62
04	3.75	2.87	3.25
05	4.37	3.50	3.87
06	5.00	4.12	4.50
07	5.62	4.75	5.12
08	6.25	5.37	5.75
09	6.87	6.00	6.37
10	7.50	6.62	7.00
11	8.12	7.25	7.62
12	8.75	7.87	8.25

1" = 25.4mm.

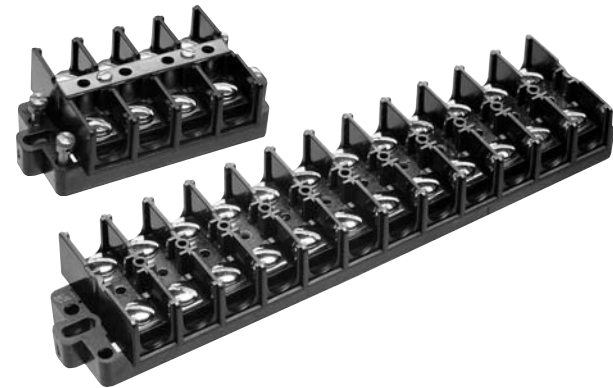

Series KU - in (mm)

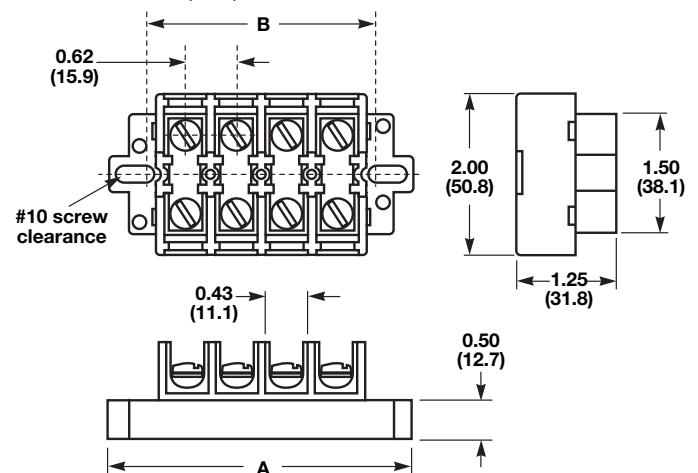

Catalog Number Build-A-Code

Series	Poles	Screw Options	Covers	Marking Strip
☐ ☐ ☐ ☐ ☐ KU = Standard block KUH = Block KUX = Short block KURL = Standard w/removable link KUXRL = Short block w/removable link	☐ ☐ - ☐ ☐ 02 to 12	00 = Screws shipped bulk W = Brass washer head, nickel-plated P = Steel screw w/pressure plate zinc-plated B = Brass washer head, no plating BP = Brass phislot, nickel-plated	☐ ☐ WC = Top cover & 2 end plates	☐ ☐ ☐ MT = Matte finish NU = Numbered 1 to 12, horizontal NUV = Numbered 1 to 12, vertical PT = Marker strip for cover

Catalog Number - SC Series

KUSC = Standard w/shorting strap & 4 shorting screws
 KUXSC = Short block w/shorting strap & 4 Shorting screws

02 to 12 00 = Screws shipped bulk
 W = Brass washer head, nickel-plated
 P = Steel screw w/pressure plate zinc-plated
 B = Brass washer head, no plating
 BP = Brass phislot, nickel-plated

WC = Top cover & 2 end plates


PT* = Marker strip for cover

*Requires WC cover option


Accessories



MTMU#
Molded Marking Tape
Matte Finish




NUM##
Molded Marking Tape



JU12
Jumper
12 Circuits



NUE
End Piece for NUC



NUC##
Cover

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

[JU12](#) [KUSC6BPWCPT](#) [KUH6B](#) [KUX4-W](#) [KUXSC6-WC](#) [KU2](#) [KU8-NLMT](#) [KUSC4](#) [KUSC6-WCPT](#) [KUXSC4-W](#)
[KUXSC6-WWCPT](#) [KUX6-WWCMT](#) [KUXSC8](#) [KUX4](#) [KU3](#) [KUSC2](#) [KUSC2-WC](#) [KUX8](#) [KU6](#) [KUX6](#) [KUSC6](#) [KUSC8-](#)
[WC](#) [KUXSC4](#) [KUX12-MT](#) [KUX4-MT](#) [KUX4-WMT](#) [KUSC6-W](#) [KUXSC6](#) [NUM12](#) [KUSC8](#) [KUXRL4](#) [KUXSC6-W](#)
[KU12-WC-MT](#) [NUE](#) [NUC4](#) [KUXSC8-WWCPT](#) [KUXRL2-BP](#) [KUSC02-WWCMT](#) [KUSC4-PWC](#) [KUXSC6-PWC](#) [KUX-](#)
[03P](#) [KURL4-BP](#) [KU4-MT](#) [KUX-12P](#) [KUXRL6-00WCNUV](#) [KUX12-W](#) [KUH12A](#) [KUX8-WNUV](#) [KUXSC6-B](#) [KU6-](#)
[NLMT](#) [KU8-WMT](#) [KUTH](#) [KUXSC4-00](#) [KU12-NLMT](#) [KUSC8-W](#) [KU8](#) [KU06-WC-MT](#) [KU4](#) [KUXSC4-GE](#) [KU12-MT](#)
[KU10-WC-MT](#) [KUH12C](#) [KUSC4-WCNL](#) [KUSC6-00W](#) [KURL8](#) [KUX12-WC](#) [KUSC4-W](#) [KUX12-00](#) [KUH12B](#) [KUX8-W](#)
[KUH6C](#) [KUXSC4-WPT](#) [KUXRL2](#) [KUXRL6-BP](#) [KU4-BPWCMT](#) [KUXSC8-BPWC](#) [KUX8-MT](#) [KU10WWC](#) [KURL12-](#)
[BP](#) [KU6-WC](#) [KU8-MT](#) [KU12-WNUV](#) [KUXSC6-00](#) [KU4-WMT](#) [KU12-WC](#) [KUH6A](#) [KUX6-MT](#) [KU6-WWCNUV](#)
[KUSC6-WC](#) [KUX-06P](#) [KUXSC6-WPT](#) [KUX6-W](#) [KU12-WMT](#) [KU6-BPWCMT](#) [KUX8-BP](#) [KUXSC8-WPT](#) [KUX8-WMT](#)
[KUXRL4-BP](#) [KUX12-BP](#) [KUSC4-WC](#)