

Silicon NPN Power Transistors

BDW93/A/B/C

DESCRIPTION

- With TO-220C package
- High DC Current Gain
- DARLINGTON
- Complement to type BDW94/A/B/C

APPLICATIONS

- Hammer drivers,
- Audio amplifiers applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

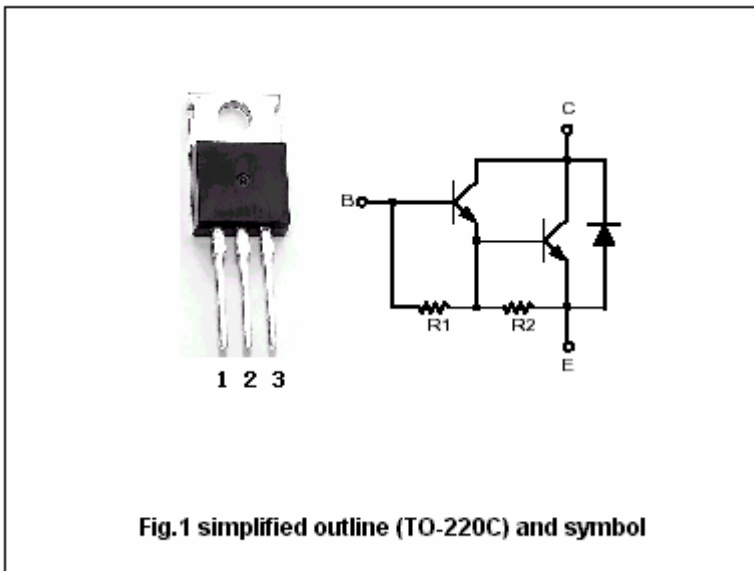


Fig.1 simplified outline (TO-220C) and symbol

Absolute maximum ratings(Ta=25)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT	
V _{CBO}	Collector-base voltage	Open emitter	BDW93	45	V
			BDW93A	60	
			BDW93B	80	
			BDW93C	100	
V _{CEO}	Collector-emitter voltage	Open base	BDW93	45	V
			BDW93A	60	
			BDW93B	80	
			BDW93C	100	
V _{EBO}	Emitter-base voltage	Open collector	5	V	
I _C	Collector current-DC		12	A	
I _{CM}	Collector current-Pulse		15	A	
I _B	Base current		0.2	A	
P _C	Collector power dissipation	T _C =25	80	W	
T _j	Junction temperature		150		
T _{stg}	Storage temperature		-65~150		

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal resistance junction to case	1.5	/W

Silicon NPN Power Transistors

BDW93/A/B/C

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO(SUS)}	Collector-emitter sustaining voltage	BDW93	I _C =0.1A, I _B =0			V
		BDW93A				
		BDW93B				
		BDW93C				
V _{CEsat-1}	Collector-emitter saturation voltage	I _C =5A, I _B =20mA			2.0	V
V _{CEsat-2}	Collector-emitter saturation voltage	I _C =10A, I _B =0.1A			3.0	V
V _{BEsat-1}	Base-emitter saturation voltage	I _C =5A, I _B =20mA			2.5	V
V _{BEsat-2}	Base-emitter saturation voltage	I _C =10A, I _B =0.1A			4.0	V
I _{CBO}	Collector cut-off current	BDW93	V _{CB} =45V, I _E =0			0.1
		BDW93A				
		BDW93B				
		BDW93C				
I _{CEO}	Collector cut-off current	BDW93	V _{CE} =45V, I _B =0			1.0
		BDW93A				
		BDW93B				
		BDW93C				
I _{EBO}	Emitter cut-off current	V _{EB} =5V; I _C =0			2	mA
h _{FE-1}	DC current gain	I _C =3A; V _{CE} =3V	1000			
h _{FE-2}	DC current gain	I _C =5A; V _{CE} =3V	750		20000	
h _{FE-3}	DC current gain	I _C =10A; V _{CE} =3V	100			
V _{F-1}	Forward diode voltage	I _F =5A			2.0	V
V _{F-2}	Forward diode voltage	I _F =10A			4.0	V

