


**NPN硅晶体管数字**

□ 开关电路，逆变器，接口电路，  
驱动电路



□ 内置偏置电阻 ( $R_1 = 10\text{ k}\Omega$ ,  $R_2 = 10\text{ k}\Omega$ )

□ 对于6引脚封装：2（电流）的内部  
隔离晶体管具有良好的匹配  
在一个封装中

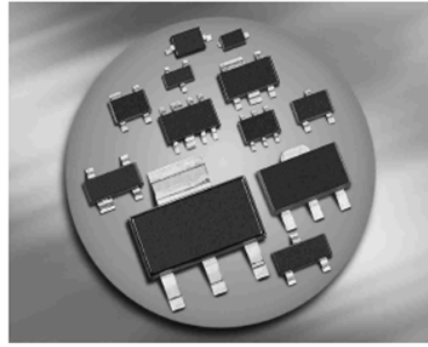

**BCR133/F/L3**  
**BCR133T/W**

**BCR133S/U**  
**SEMH11**



TYPE	记号	引脚配置						包
BCR133	WCS	1=B	2=E	3=C	-	-	-	SOT23
BCR133F	WCS	1=B	2=E	3=C	-	-	-	TSFP-3
BCR133L3	WC	1=B	2=E	3=C	-	-	-	TSLP-3-4
BCR133S	WCS	1 = E1	2 = B	3 = C2	4 E2	5 = B2	6 = C1	SOT363
BCR133T	WCS	1=B	2=E	3=C	-	-	-	SC75
BCR133U	WCS	1 = E1	2 = B	3 = C2	4 E2	5 = B2	6 = C1	SC74
BCR133W	WC	1=B	2=E	3=C	-	-	-	SOT323
SEMH11	WC	1 = E1	2 = B	3 = C2	4 E2	5 = B2	6 = C1	SOT666