




Global Supplier of Optoelectronic Solutions

6N135

UL # E244343

Schematic:



For dimensions and pin-outs, see the last page of this document.

Features:

1. High speed response t_{PLH}, t_{PHL} (MAX.1.5us at $RL=4.1k\Omega$)
2. High common mode rejection voltage (CM:TYP.1kV/us)
3. Standard dual-in-line package

Ordering:

Suffix to Standard Part Number

- V = VDE Approved
- G = 10mm Lead Spread
- S = Surface Mount Lead-form
- T = Tape & Reel

Applications:

- Computers, measuring instruments, control equipment.
- High speed line receivers high speed logic.
- Telephone sets.
- Signal transmission between circuits of different potentials and impedances.

Absolute Maximum Ratings:

(Ta=25°C)				
Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	25	mA
	* ¹ Peak forward current	I _F	50	mA
	* ² Peak transient forward current	I _{FM}	1	A
	Reverse voltage	V _R	5	V
	Power dissipation	P	45	mW
Output	Supply voltage	V _{cc}	-0.5 to 15	V
	Output voltage	V _o	-0.5 to 15	V
	Emitter-base reverse with-stand voltage (Pin 5 to 7)	V _{EBO}	5	V
	Average output current	I _o	8	mA
	Peak output current	I _{op}	16	mA
	Base current (Pin 7)	I _B	5	mA
	Power dissipation	P _o	100	mW
* ³ Isolation voltage 1 minute		V _{iso}	2500	Vrms
Operating temperature		T _{opr}	-55 to +100	°C
Storage temperature		T _{stg}	-55 to +125	°C
* ⁴ Soldering temperature		T _{sol}	260	°C

*1 50% duty cycle,Pulse width : 1ms
Decreases at the rate of 1.6mA/°C if the external temperature is 70°C or more.

*2 Pulse width<=1uS,300pulse/sec

*3 40 to 60% RH,AC for 1 minute

*4 For 10 seconds



Global Supplier of Optoelectronic Solutions

6N135

UL # E244343

Electrical Characteristics:

(Ta=0 to +70°C unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
* ⁵ Current transfer ratio	CTR (1)	Ta= 25°C , I _F =16mA V _O = 0.4V , V _{CC} = 4.5V	7	40	-	%
	CTR (2)	I _F =16mA V _O = 0.5V , V _{CC} = 4.5V	5	43	-	%
Logic (0) output voltage	V _{OL}	* ⁶ V _{CC} = 4.5V,I _F =16mA	-	0.1	0.4	V
Logic (1) output current	I _{OH} (1)	Ta= 25°C , I _F =0 V _O = V _{CC} = 5.5V	-	3.0	500	nA
	I _{OH} (2)	Ta= 25°C , I _F =0 V _O = V _{CC} = 15V	-	0.01	1.0	uA
	I _O (8)	V _{CC} = V _O = 15V,I _F =0	-	-	50	uA
Logic (0) supply current	I _{CCL}	I _F =16mA V _O = open , V _{CC} = 15V	-	200	-	uA
Logic (1) supply current	I _{CCH} (1)	I _O =0 V _F = open , V _{CC} = 15V	-	0.02	1.0	uA
	I _{CCH} (2)	I _O =0 V _O = open , V _{CC} = 15V	-	-	2.0	uA
Input forward voltage	V _F	Ta= 25°C , I _F = 16mA	-	1.7	1.95	V
Input forward voltage temperature coefficient	* ⁸ V _F / ⁹ Ta	I _F = 16mA	-	-1.9	-	mV/°C
Input reverse voltage	B _{AR}	Ta=25°C , I _R =10uA	5.0	-	-	V
Input capacitance	C _{IN}	V _F =0 , f=1MHz	-	60	-	pF
* ⁷ Leak current(input-output)	I _{IO}	Ta= 25°C , 45 % RH V _{I-O} =3kVDC , t = 5s	-	-	1.0	uA
* ⁷ Isolation resistance(input-output)	R _{I-O}	V _{I-O} =500VDC	-	10 ¹²	-	Ω
* ⁷ Capacitance(input-output)	C _{I-O}	f=1MHz	-	0.6	-	pF
Transistor current amplification factor	h _{FE}	V _O = 5V , I _O = 3mA	-	70	-	

*⁵ Current transfer ratio is the ratio of input current and output current expressed in %*⁶ I_O = 1.1mA*⁷ Measured as 2-pin element (Short 1,2,3,4 and 5,6,7,8)



Switching Characteristics

(Ta=25°C,V_{CC}=5V,I_F=16mA)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
* ⁸ Propagation delay time Output (1)→(0)	t _{PHL}	R _L = 4.1kΩ	-	0.3	1.5	uS
* ⁸ Propagation delay time Output (0)→(1)	t _{PLH}	R _L = 4.1kΩ	-	0.4	1.5	uS
* ¹⁰ * ¹¹ Instantaneous common mode rejection voltage "Output (1)"	C _{MH}	I _F =0,V _C =10V _{p-p}	-	1000	-	V/uS
* ¹⁰ * ¹¹ Instantaneous common mode rejection voltage "Output (0)"	C _{ML}	I _F =16mA,V _{CM} =10V _{p-p}	-	-1000	-	V/uS
* ¹² Bandwidth	BW	R _L = 100Ω	-	2.0	-	MHz

*⁸ R = 4.1kΩ is equivalent to one LSTTL and 6.1kΩ pull-up resistor.*¹⁰ Instantaneous common mode rejection voltage "output(1)" represents
a common mode voltage variation that can hold the output above (1) level (V_O > 2.0V)
Instantaneous common mode rejection voltage "output(0)" represents
a common mode voltage variation that can hold the output above (0) level (V_O < 0.8V)*¹² Bandwidth represents a point where AC input goes down by 3dB.

*9 Tset Circuit Propagation Delay Time

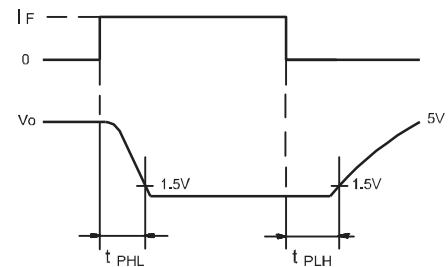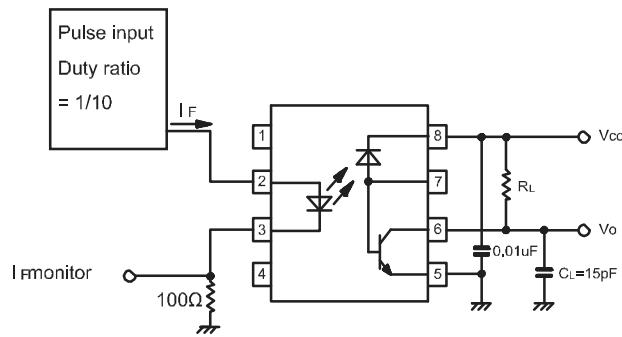

*11 Tset Circuit for Instantaneous Common Mode Rejection Voltage

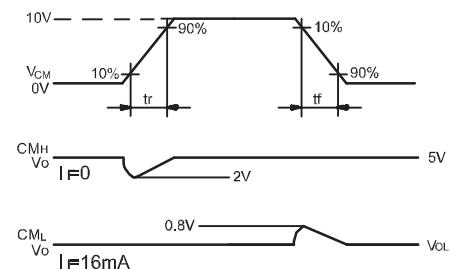
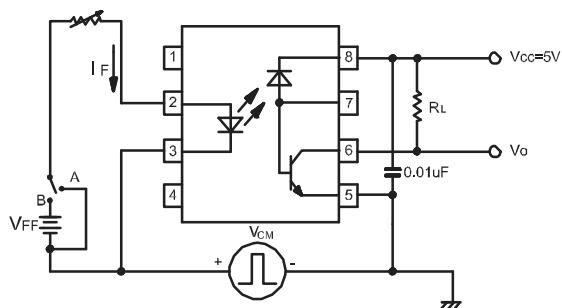
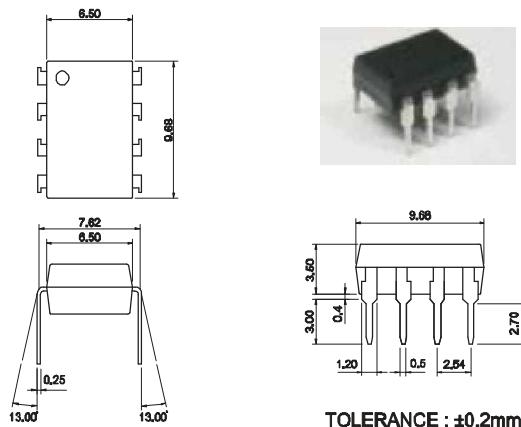
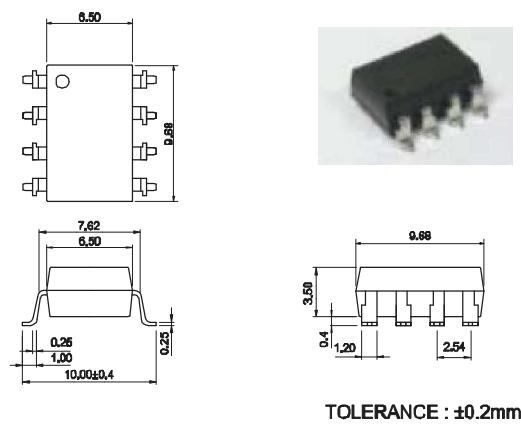
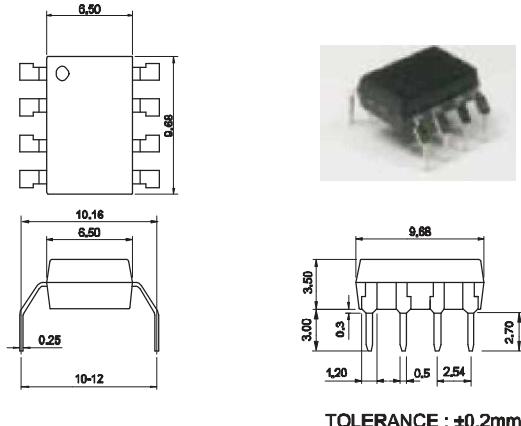


Fig.7 : 8-pin DIP type**Fig.8 : 8-pin SMD type****Fig.9 : 8-pin G type**

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn