


NPN硅晶体管数字

□ 开关电路, 逆变器, 接口电路
驱动电路



□ 内置偏置电阻 ($R_1=10k\Omega$, $R_2=47k\Omega$)

□ 对于6引脚封装: 2 (电流) 的内部
隔离晶体管具有良好的匹配
在一个封装中

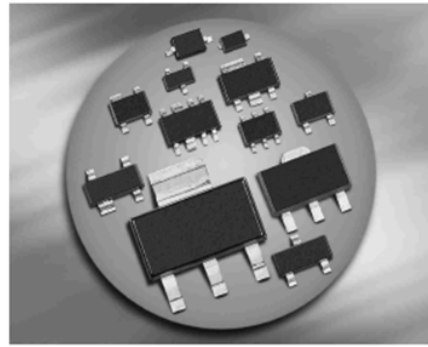

BCR135/F/L3
BCR135T/W

BCR135S
SEMH9



TYPE	记号	引脚配置						包
		1=B	2=E	3=C	-	-	-	
BCR135	WJS	1=B	2=E	3=C	-	-	-	SOT23
BCR135F	WJS	1=B	2=E	3=C	-	-	-	TSFP-3
BCR135L3	WJ	1=B	2=E	3=C	-	-	-	TSLP-3-4
BCR135S	WJS	1 = E1	2 = B	3 = C2	4 E2	5 = B2	6 = C1	SOT363
BCR135T	WJS	1=B	2=E	3=C	-	-	-	SC75
BCR135W	WJS	1=B	2=E	3=C	-	-	-	SOT323
SEMH9	WJ	1 = E1	2 = B	3 = C2	4 E2	5 = B2	6 = C1	SOT666