

1.2产品特点

- ✦ 高开关速度
- ✦ 低漏电流
- ✦ 高的击穿电压
- ✦ 低电容

1.3应用

- ✦ 超高速开关
- ✦ 电压钳位

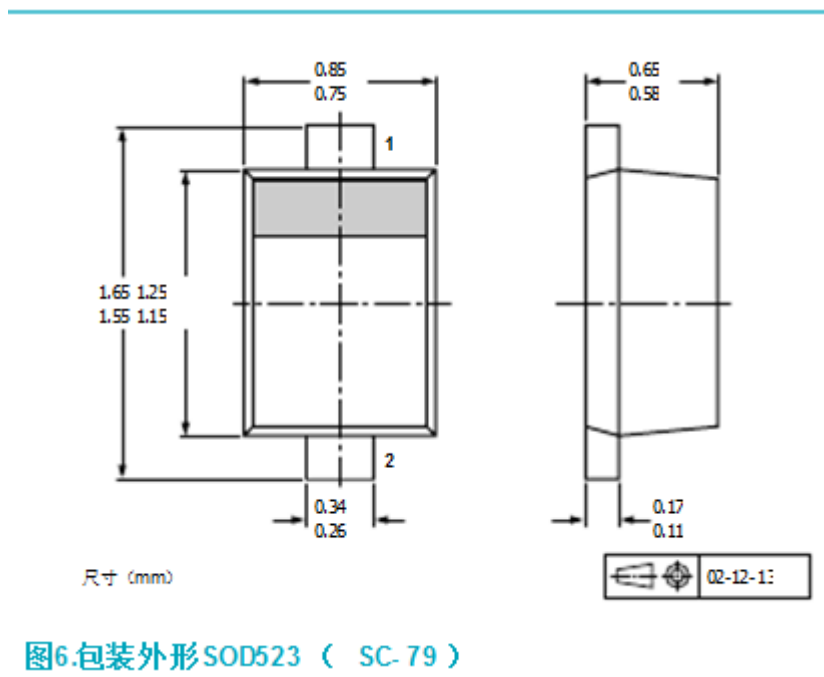


图6.包装外形SOD523 (SC-79)




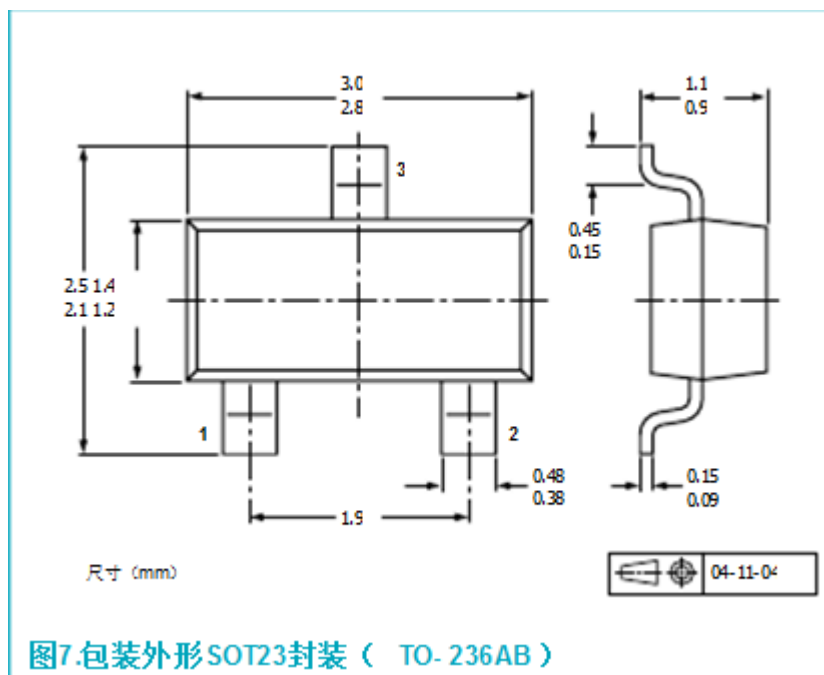


图7.包装外形SOT23封装 (TO-236AB)

BAS40 ; BAS40W ; 1PS70SB40

- | | |
|---|------|
| 1 | 阳极 |
| 2 | 没有连接 |
| 3 | 阴极 |

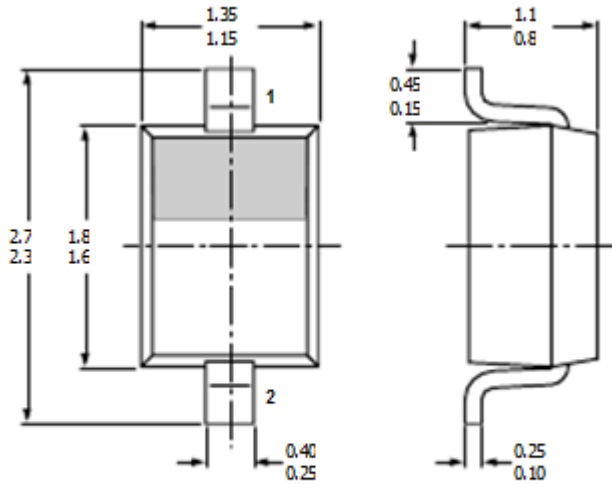

尺寸 (mm)



图5封装外形SOD323 (SC-76)