
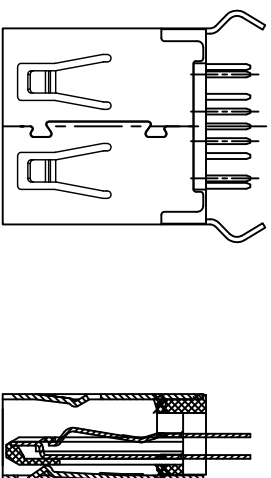


RECOMMENDED P.C.B LAYOUT(±0.05)

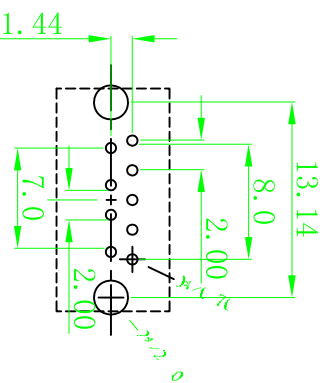

No.	PART NAME	QTY	MATERIAL	REMARK
5	SHELL	1	COPPER ALLOY	NI PLATED
4	SPIN	5	COPPER ALLOY	AU/TIN PLATED
3	4PIN	4	COPPER ALLOY	AU/TIN PLATED
2	COVER	1	THERMOPLASTIC	(UL 94V-0) BLUE
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0) BLUE

- NOTES:  
 1.ELECTRONIC:  
 CONTACT RESISTANCE: 30mohm MAX  
 INSULATION RESISTANCE: 1000 Mohm MIN  
 WITHSTAND VOLTAGE:AC 500V,1min.  
 2.MECHANICAL:  
 DURABILITY: 1500 CYCLE.  
 3.ENVIRONMENT CHARACTERISTICS:  
 OPERING TEMPERATURE:-55? TD +105?  
 4.RECOMMANDER PCB THICKNESS 1.2 TD 1.60MM

产品图  
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表		制图		制图料号	
TOLERANCE UNLESS OTHERWISE	UNITS	DRAWING	DRW	PRODUCT PART NO.	PRODUCT NAME
X ±5°	MM	审核	邱建辉	USB A母180度	11.5
X ±2°	SCALE	核准	郭治富	角法	版本
XX ±1°	DATE	APRD	黄国荣	VER	AD
XXX ±0.5°	20160728				

MAPX	MODIFICATION	DATE