
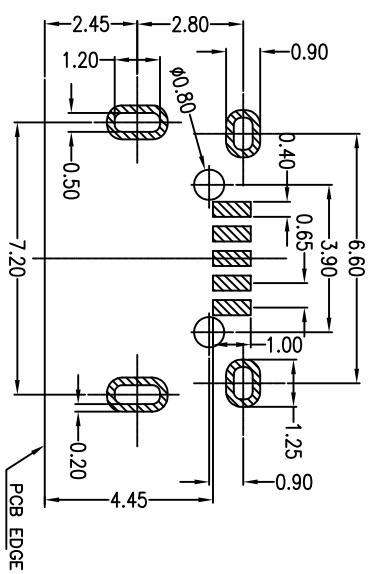
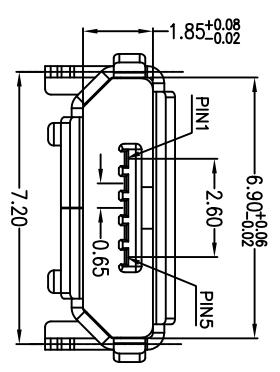
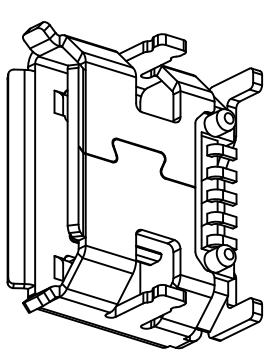
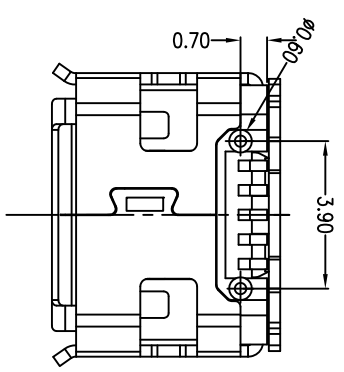

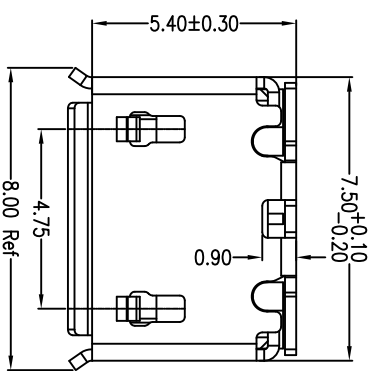


REV.	ECH NO	LOCATIONS	DESCRIPTION	DATE

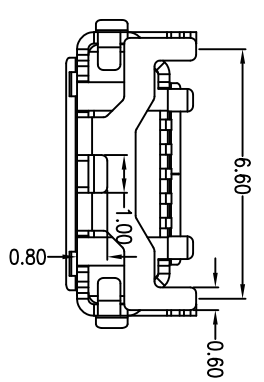

POB图仅供参考
RECOMMAND PCB LAYOUT

- Note:
1. Material:
- Housing: LCP High temperature thermoplastic with g.f.i,UL94V-0
 - Contact: copper alloy,t=0.15mm
 - Shell: SUS304,t=0.30mm
2. Specification:
- Current rating: 1.5PIN 1.8A Max/2,3,4PIN 1A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.
 - Temperature range: -30°C~80°C

- A 01 S B X X X X X X X X X X XX-184
- ① 外壳材质
② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪
- 外壳电镀
1: Ni50U''
2: 雾150U''
3: NiAu1U'' (脚)
4: Au1U''
- 端子电镀
01: Au1U'' ; 02: Au1.5U'' ; 03: Au30U''
05: Au60U'' ; 10: Au100U'' ; 15: Au150U'' ; 30: Au300U''
- 主体颜色 B: 黑色
- 主体材质 1: LCP
- 端子材质 4: 05191R-4H

PART NO:	A01SBXXXXXXXX-184	MATERIAL:	SEE NOTE
MODEL NO:	XX	FINISH:	SEE NOTE
UNIT:	MM	SIZE:	A4
TOLERANCE UNSPECIFIED		DR:	Xiyayoulong
.x	±0.15	CHK:	
.xx	±0.10	APP:	
.xxx	±0.05	SCALE:	5:1
Ang.	±1°	DATE:	2012.07.13
TITLE:		DWG NO:	A184
MICRO USB 5S B TYPE牛角型全插6.60/7.2有柱短脚新模		REV:	A

深圳市精拓金电子有限公司

