
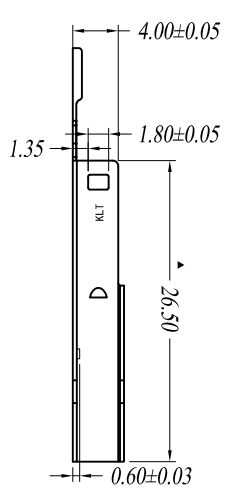
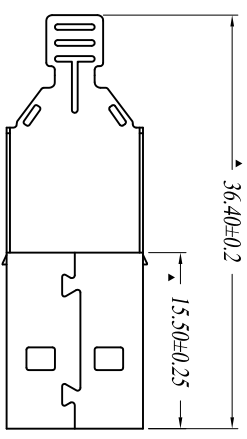

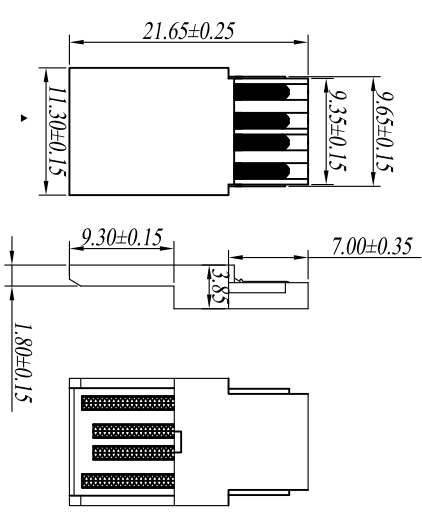




D1 = 3.0
D2 = 3.8
D3 = 4.5
D4 = 5.5

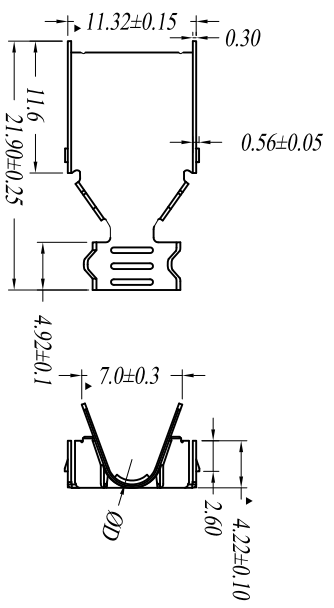

ELECTRICAL
 Current rating: 1Amp
 Dielectric withstanding voltage:
 AC 250v min(for 1 minute)
 Insulation resistance:
 1000MΩ min(at 500v DC)
 Contactresistance:
 30mΩ max
 Durabil tty: 2500 cycles
 Working temperature: -55° C~+105° C
标注“▲”的为重点管控尺寸

MECHANICAL
 Insulator material:
 PBT&glass-fiber reinforced UL 94-H
 Contact: Brass
 Housing color: white
 Shell: nickel(ortin,gold)plated
 Number of contact: 04.
 Durabil tty: 2500 cycles

NOTE:
 1. 材质: SPOC T= ±0.30mm。
 2. 电镀: 铜底 100U” 镍底 100U” 盐雾测试24H & 12H
 3. 产品表面无明显毛边, 压痕, 划伤等现象。

产品图
 PRODUCT CHART DWG

深圳市精拓金电子有限公司

TOLERANCE UNLESS OTHERWISE		公差	UNIT		单位	DRAWING		PRODUCT PART NO.		VIEW	
X	±0.15	X	±5.°	MM	MM	2-Y-B	USB A公母 4件装		A0		
X	±0.10	X	±2.°	1:1	比例	CHD	PRODUCT NO.		VER		
XX	±0.05	XX	±1.°	2014.07.10	日期	APPD	PRODUCT NO.		VER		
XXX	±0.03	XXX	±0.5°		DATE		PRODUCT NO.		VER		

MAPX

MODIFICATION

DATE

