

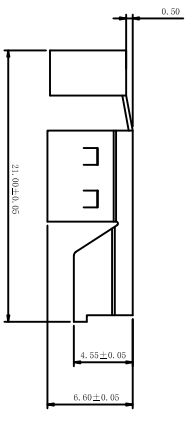

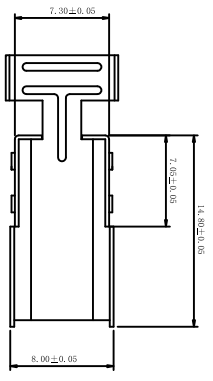


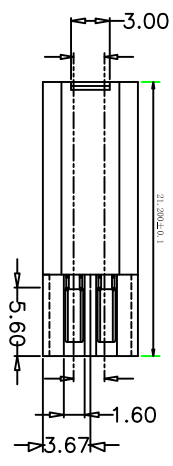
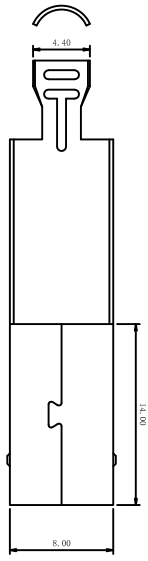


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
------------	----------------------	------------

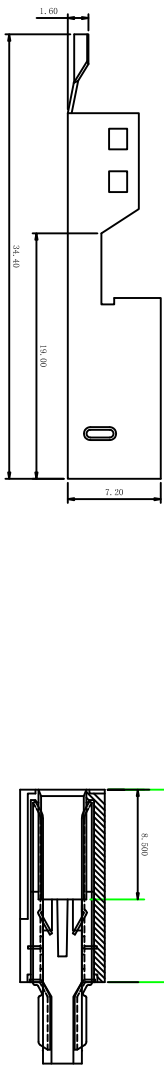

USB-AM SOLDER TAIL
焊线式

特性: Specifications
电器 Electrical:

接触阻抗: Contact Resistance
30milliohms MAX
耐压: Dielectric Withstanding Voltage
50V AC AT sea level

绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

材料: Material:
塑胶: Housing:Hing PBT白胶
端子: Contact:Copper Alloy 铜合金
铁壳: Shell:SPCC-SD 铁

电镀: Finish:
端子: Contact: Plated gold in Mating Area:
Tin/Lead On Solder Tails
接触点镀金, 脚镀锡铅

铁壳: Shell:
Tin/Lead Plating 镀锡

Ordering Informating
X-5-XX

contact plating
01-Gold Flash
02-1-5u"Gold/Tin
Plastic Color
A=Black

深圳市精拓金电子有限公司

产品图 PRODUCT CHART DWG		单位 UNITS		制图 DRAWING		产品料号 PRODUCT PART NO.	
公差一览表 TOLERANCE UNLESS OTHERWISE		MM		邱建辉		USBBA 三件套0.3	
X	±0.25	X	±5°	审核 CHECK	郭治富	角法 FINISH	版本 REV
XX	±0.20	X'	±2°	核准 APPD	黄国荣	⊕	A0
.XX	±0.15	.XX'	±1°	日期 DATE	2014/10/20	⊖	
.XXX	±0.10	.XXX'	±0.5°				