
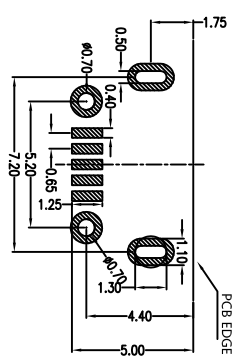


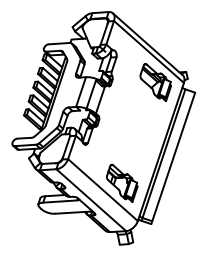


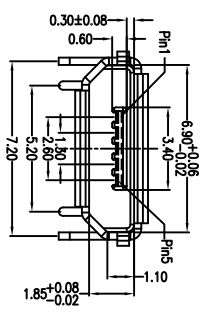


MAPX	MODIFICATION	DATE
------	--------------	------

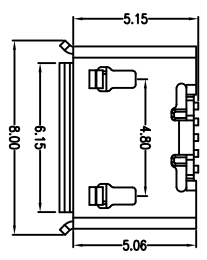

- Note:
- Material:
 - Housing: High temperature thermoplastic with g4:1U94w-0
 - Contact: copper alloy/t=0.15mm
 - Shell: copper alloy/t=0.30mm
 - Specification:
 - Current rating: 1.5PIN 1.8A Max/2.3,4PIN 1A Max. voltage: 100 V(Dc) for 1 min.
 - Dielectric withstanding voltage: 100 V(Dc) for 1 min.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.
 - Temperature range: -30C~80C

深圳市精拓金电子有限公司

产品图		制图料号	
PRODUCT CHART DWG		Z-Y-B	
公差一览表			
TOLERANCE UNLESS OTHERWISE	UNIT	MM	制图
X ±0.25 X	UNITS	1.1	审核
X ±0.20 X	SCALE		CHRD
.XX ±0.15 .XX	DATE	2015.01.14	核准
.XXX ±0.10 .XXX	DATE		APPD
			版本
			VER
			A0