

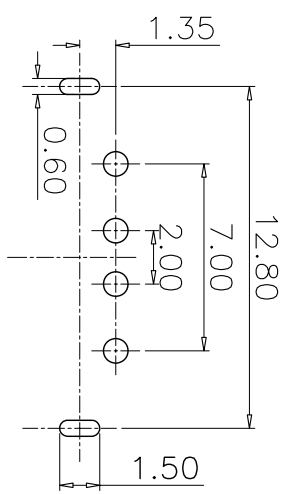
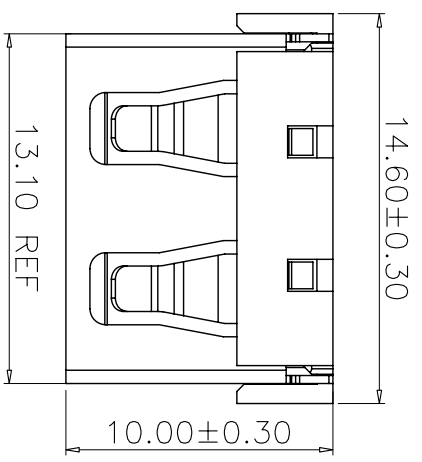


MAPX	MODIFICATION	DATE
------	--------------	------

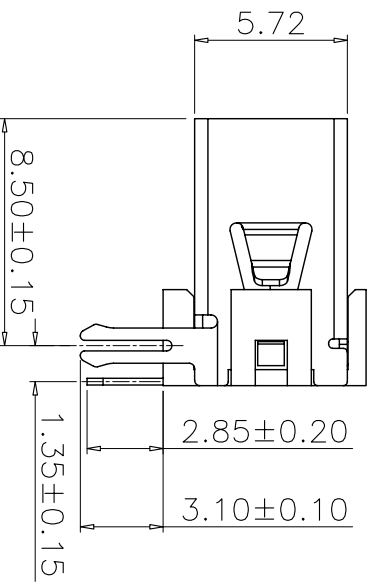

PCB HOLES(THE PATTERN SIDE)
NOTE:GENERAL TOLERANCE:±0.1mm

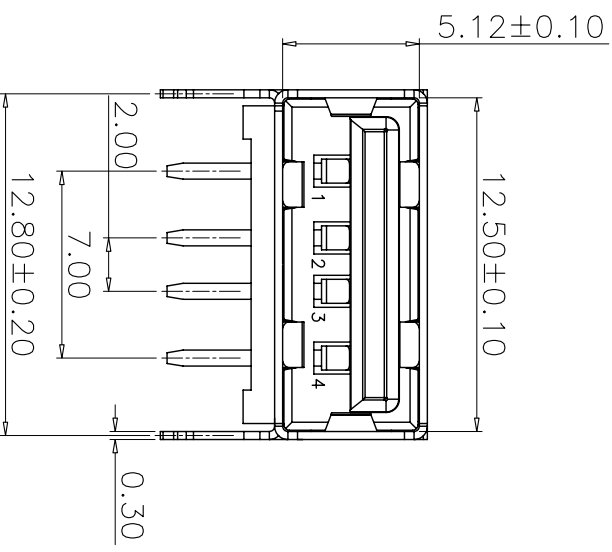

- NOTES:
- HOUSING: SEE NOTES, TERMINAL: SEE NOTES, SHELL: SEE NOTES.
 - ELECTRICAL CHARACTERISTIC: CONTACT RESISTANCE: 30MΩ MAX DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN INSULATION RESISTANCE: 1000MΩ MIN
 - MECHANICAL CHARACTERISTIC: INSERTION FORCE: 35N(3.57KGF) MAX EXTRACTON FORCE: 10~35N(1.02~3.57KGF) MIN DURABILITY: 1500 CYCLES EXTRACTON FORCE:10~35N 5000 CYCLES MIN 5000 CYCLES EXTRACTON FORCE:3~35N
 - ENVIRONMENTAL: OPERATING TEMPERATURE: -55°C+85°C
 - Contact finish:
 - 01:Selective Gold Flash
 - 02:Selective Gold 3U"
 - 03:Selective Gold 5U"
 - 04:Selective Gold 15U"
 - 05:Selective Gold 30U"

深圳市精拓金电子有限公司

产品图		公差一览表		单位	MM	制图	Z-Y-B	制图料号	USB A/F 10.0-B-003
TOLERANCE UNLESS OTHERWISE	UNITS	SCALE	DATE	DATE	CHKD	APPR	VIEW	PRODUCT NO	版本
X ±0.15 X ±5.°	X ±0.10 X ±2.°	XX ±0.05 XX ±1.°	XXX ±0.03 XXX ±0.5°	2010.05.06	审核	核准	角法	USB A/F 10.0 (后两脚无边)	A0