


| | | |
|------|--------------|------|
| MAPX | MODIFICATION | DATE |
|------|--------------|------|

NOTE:
 1. Material:
 Housing: Thermoplastics (L94V-0(ROHS-HP))
 Contact: Phosphor Bronze C5191-2H/C2680-2H, T=0.25mm
 Shell: COPPER ALLOY T=0.30mm
 2. FINISH:
 Contact: 15u" Gold Plated on Contact Area,
 80u" Min. Tin Plated on Solder Area
 50u" Min. Nickel Underplating Over All.
 Shell: 50u" Min Nickel Underplating Over All.
 3. Specification:
 3.1: Rating:
 3.2: Rated voltage 500V AC/DC. Rated current: 2 A Max.
 3.2: Electrical:
 Insulation Resistance(EIA-364-21):
 1000MΩ Min. at 500V/DC for 1Minute.
 Contact Resistance(EIA-364-22):
 30 mΩ Max. at 20mV Max, 50mA
 Dielectric Withstanding Voltage(EIA-364-20):
 No discharge, Flashover or breakdown at 500V/AC 1Minute
 4. Plug extraction force shall be between 1.0kgf and 2.00kgf
 5. Contact finish:
 01: Selective Gold Flash
 02: Selective Gold 3U"
 03: Selective Gold 5U"
 04: Selective Gold 15U"
 05: Selective Gold 30U"

RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCES: ±0.05

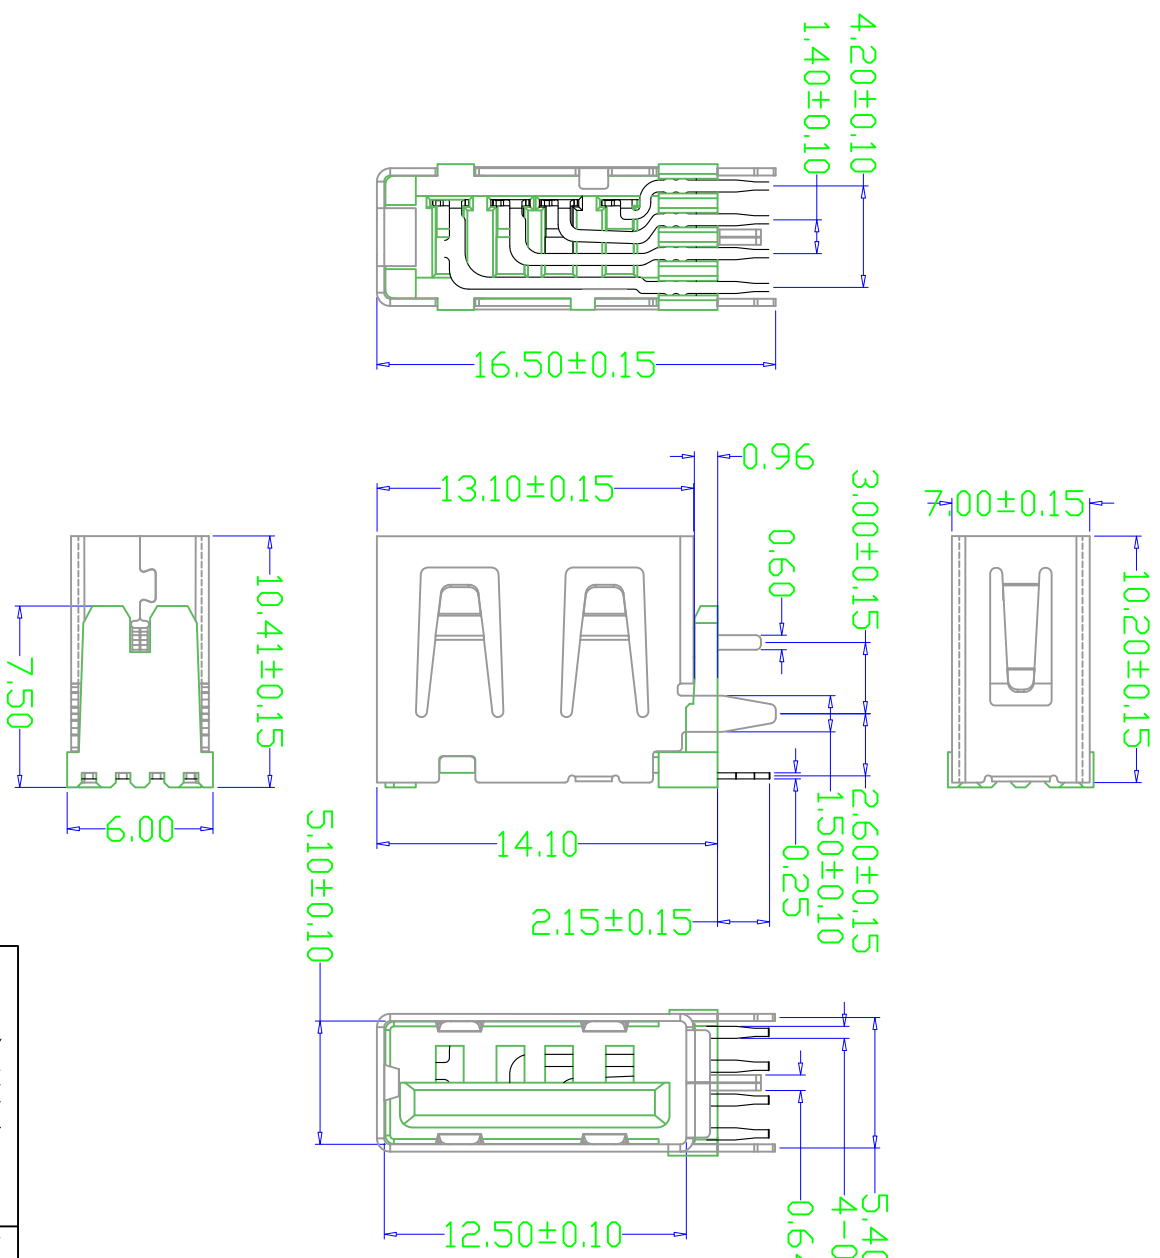

产品图
 PRODUCT CHART DMC

深圳市精拓金电子有限公司

公差一览表
 TOLERANCE UNLESS OTHERWISE:

| | | | |
|------|-------|------|-------|
| X. | ±0.25 | X. | ±5.° |
| .X | ±0.20 | .X | ±2.° |
| .XX | ±0.15 | .XX | ±1.° |
| .XXX | ±0.10 | .XXX | ±0.5° |

| | | | | | |
|-------------|------------|---------------|-------|--------------------------|------------------------------|
| 单位 UNITS | MM | 制图 DRAWING | Z-Y-B | 制图料号 PRODUCT PART NO. | |
| 比例 SCALE | 1:1 | 审核 CHECK | | 产品名称 PRODUCT NO. | AF10.0(侧插短体三直脚有边成品 (加高型)) |
| 日期 DATE | 2014.02.20 | 核准 APPRO | | 角法 VIEW | 版本 VER |
| | | | | | A0 |