
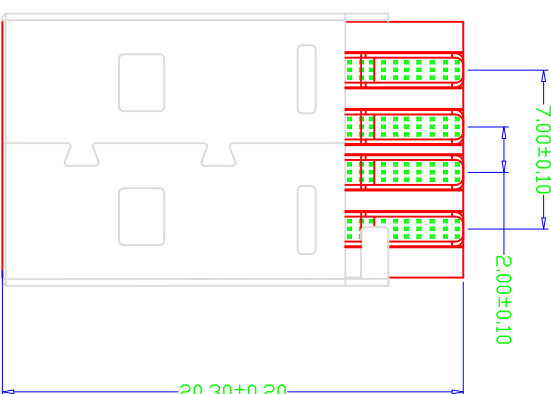
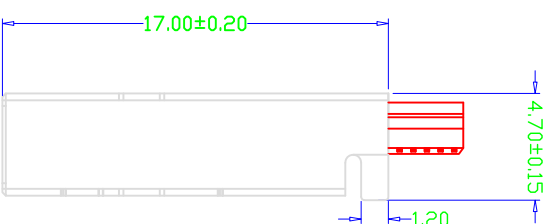
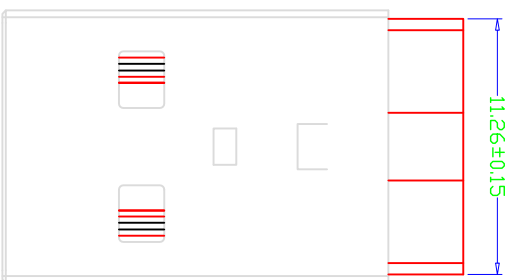


ROHS



NOTES:
Housing: Thermoplastics
Contact: Copper Alloy
Shell: Copper Alloy/SPCC
Voltage Current Rating:1.5 AMP, 30V AC
Insulation Resistance:1000M Ω Min.
Contact Resistance:30 m Ω Max.
Dielectric Withstanding Voltage:500V AC
Temperature Range:-55° C to +85° C
Insulator color: Black/White
Plastic material:PBT/LCP
Shell finish:Nickel plated
Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

MAPX	MODIFICATION	DRW	DATE

产品图

深圳市精拓金电子有限公司

公差一览表

单位: MM

制图: 许榕强

制图料号: 917-161B101AA0220

TOLERANCE	UNLESS OTHERWISE SPECIFIED	OTHERWISE
X	±0.35	X ±5.°
X	±0.20	X ±2.°
.XX	±0.10	.XX ±1.°
.XXX	±0.05	.XXX ±0.5°

UNITS	MM
SCALE	1:1

DATE	APPRO	DATE	APPRO
2018-11-27	郭治富		
	黄国荣		

PRODUCT NAME	角法
USB AM前壳17.0 (1款短脚) DR专用	

VERSION	版本
A0	

