

RoHS

REVISIONS

| SYM | ECN No. | MODIFICATION | DATE | ISSUED |
|-----|---------|--------------|------|--------|
| | | | | |

Note:

1.Material:

- 1.1,Housing: High temperature thermoplastic with/black g.f,UL94v-0
- 1.2,Contact: copper alloy,t=0.25mm
- 1.3,Shell: copper/Ferroalloy alloy,t=0.35mm

2.Specification:





- 2.1,Current rating:3A Max.
- 2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3,Contact resistance: 30 mΩ Max.
- 2.4,Insulation resistance: 100 MΩ Min.
- 2.5,Total mating force: 3.57 Kg Max.
- 2.6,Total unmating force: 1.0 Kg Min.

3.Finish:

- 3.1,Contact: Plated Golg in Mating Area:
Tin On Solder Talls
Shell: Nickel Plating

4.Environmental:

- 4.1,Temperature range: -55°C~85°C

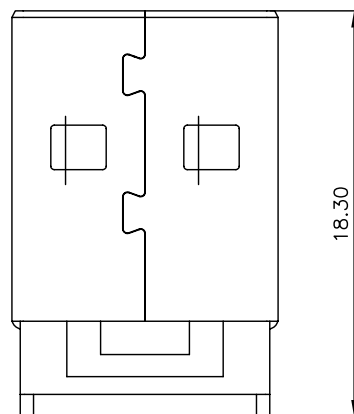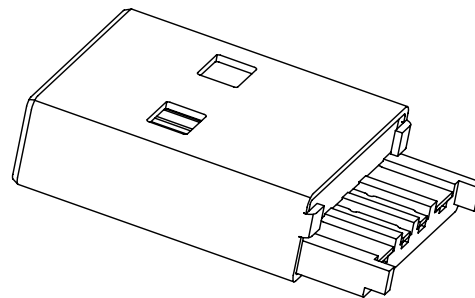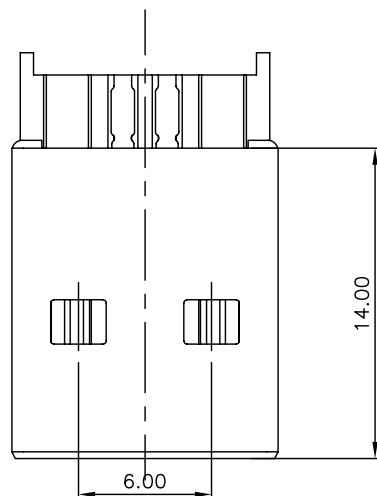

| | | | | | |
|----------------------|--|-----------------------------------|--|----------|--------|
| DRAWN | | JTJ 深圳市精拓金电子有限公司 | | | |
| CHECKED | | TITLE | | PART NO. | |
| APPROVED | | USB AM 大电流焊线式 一件式 | | -- | |
| 3rd ANGLE PROJECTION | | TOLERANCE | | SCALE | SHEET |
| UNIT | | .XXX±.10, .XX±.15, .X±.25, ANG±1° | | 1:1 | 1 OF 1 |
| mm | | | | SIZE | REV. |
| | | | | A4 | X1 |