

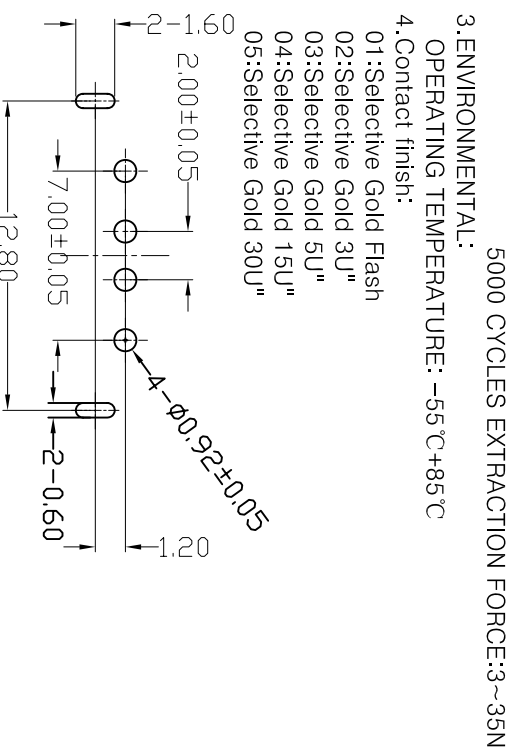
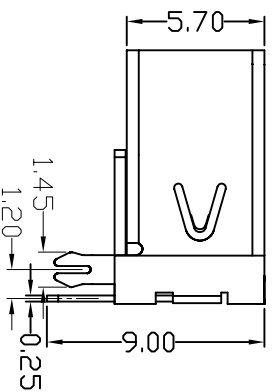
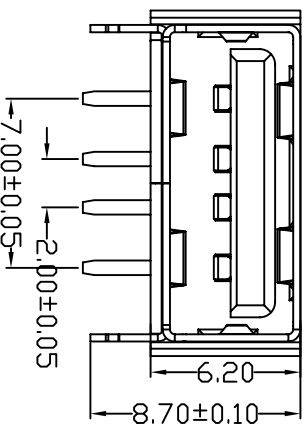


D款，正向10.6后两脚，DIP-*6.20

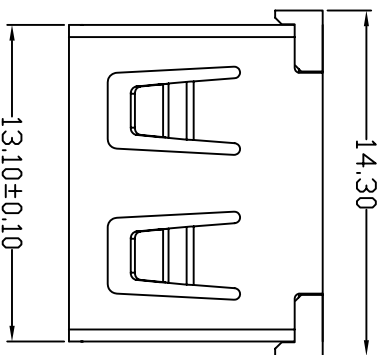

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

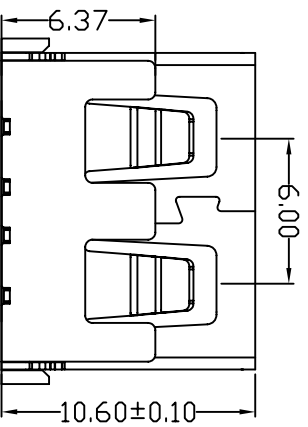

NOTES:

1. HOUSING: SEE NOTES, UL94V-0.
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:

1. ELECTRICAL CHARACTERISTIC:

CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN

2. MECHANICAL CHARACTERISTIC:

INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN

3. ENVIRONMENTAL:

OPERATING TEMPERATURE: -55°C+85°C

4. Contact finish:

- 01: Selective Gold Flash
- 02: Selective Gold 3U"
- 03: Selective Gold 5U"
- 04: Selective Gold 15U"
- 05: Selective Gold 30U"

产品图
PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	公差
X ±0.15	X ±5°
X ±0.10	X ±2°
XX ±0.05	XX ±1°
XXX ±0.03	XXX ±0.5°

深圳市精拓金电子有限公司

单位	MM	制图	Z-Y-B	制图料号	JTJ-USB-10.6-002
UNITS	MM	DRAWING	Z-Y-B	PRODUCT PART NO.	JTJ-USB-10.6-002
比例	1:1	审核	CHD	产品名称	USB A/F 10.6无边后两脚鱼叉(方弹)
日期	2012/09/24	核准	APPD	角法	VER
DATE	2012/09/24	核准	APPD	角法	VER

MAPX

MODIFICATION

DATE