


# A/F无后盖有边弯脚/SMT (5.85)

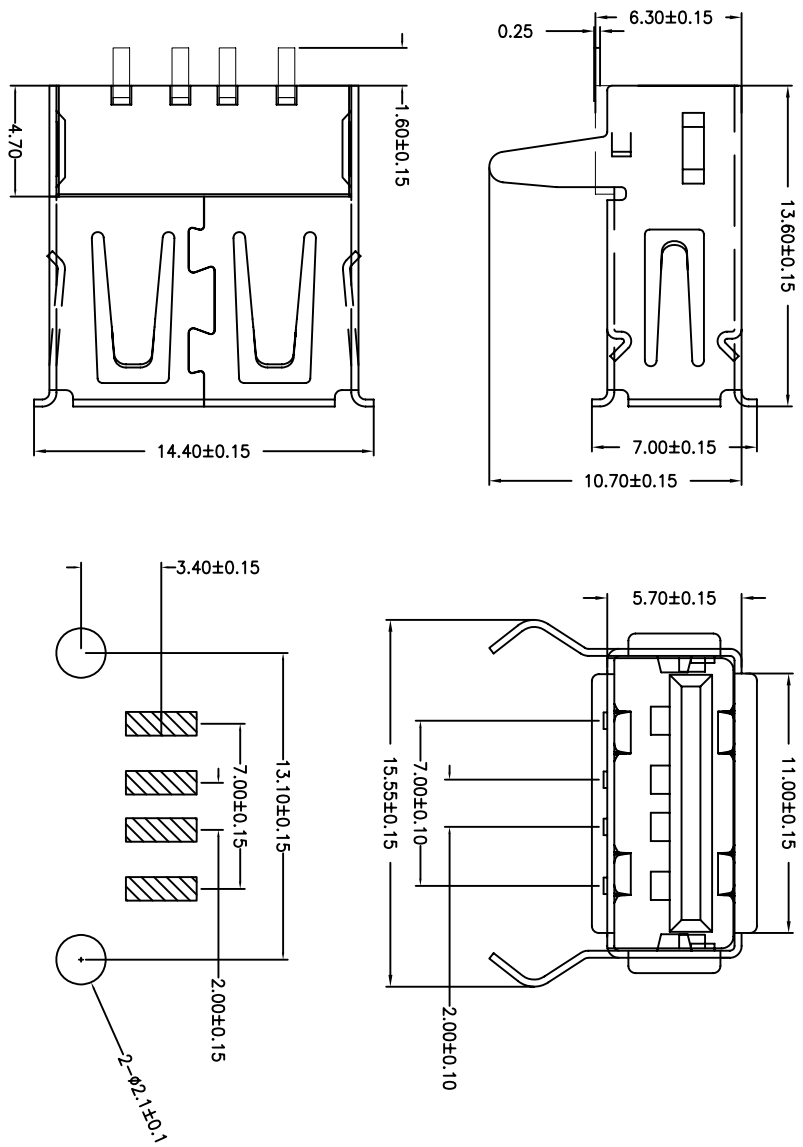

备注：侧弹分为外弹与内弹

## NOTES:

- Housing: Thermoplastics, UL94V-0
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating: 1.5 AMP, 30V AC
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 30 MΩ Max.
- Dielectric Withstanding Voltage: 500W AC
- Temperature Range: -35°C to +85°C
- Insulator color: Black/White
- Plastic material: PBT/LCP/Others
- Shell finish: Nickel plated/Tin-Lead plated
- Mechanical:
  - Mating Force: 3.5KG MAX
  - Umating Force: 0.7 KG MIN.
  - Contact finish:
    - 01: Selective Gold Flash
    - 02: Selective Gold 3U"
    - 03: Selective Gold 5U"
    - 04: Selective Gold 15U"
    - 05: Selective Gold 30U"

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
------------	----------------------	------------

### 产品图 PRODUCT CHART DWG

## 深圳市精拓金电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS		MM	
X	±0.35	X'	±5'	比例 SCALE	1:1
.X	±0.25	.X'	±2'	日期 DATE	
.XX	±0.15	.XX'	±1'	制图 DRAWING	2-V-B
.XXX	±0.10	.XXX'	±0.5'	审核 CHECK	雷永健
				核准 APPRO	雷永健
				产品料号 PRODUCT PART NO.	
				产品名称 PRODUCT NA.	USB-A/F无后盖弯脚 SMT
				角法 VIEW	⊕ ⊖
				版本 VER	A0