




目錄 MAPX	變更內容 MODIFICATION	日期 DATE
------------	----------------------	------------

NOTES:

- Housing: Thermoplastics, UL94V-0
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating: 1.5 AMP. 30V AC
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 30 MΩ Max.
- Dielectric Withstanding Voltage: 500W AC
- Temperature Range: -35°C to +85°C
- Insulator color: Black/White
- Plastic material: PBT/LCP/others
- Shell finish: Nickel plated/Tin-Lead plated
- Mechanical:
- Mating Force: 3.5KG MAX
- Umating Force: 0.7 KG MIN.
- Contact finish:
- 01: Selective Gold Flash
- 02: Selective Gold 3U”
- 03: Selective Gold 5U”
- 04: Selective Gold 15U”
- 05: Selective Gold 30U”

RBCOMMENDBD P.C.B PATTBRN LAYD UT

备注：侧弹分为外弹与内弹

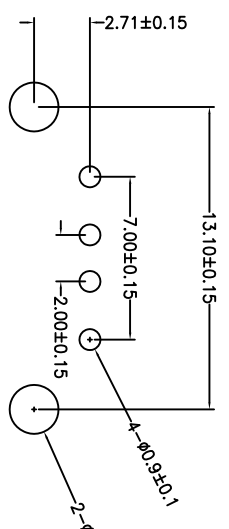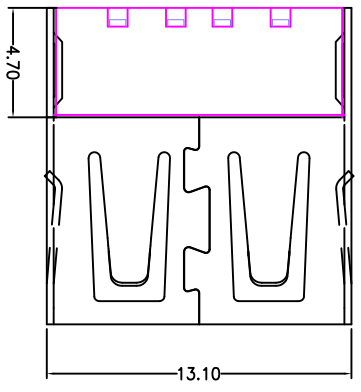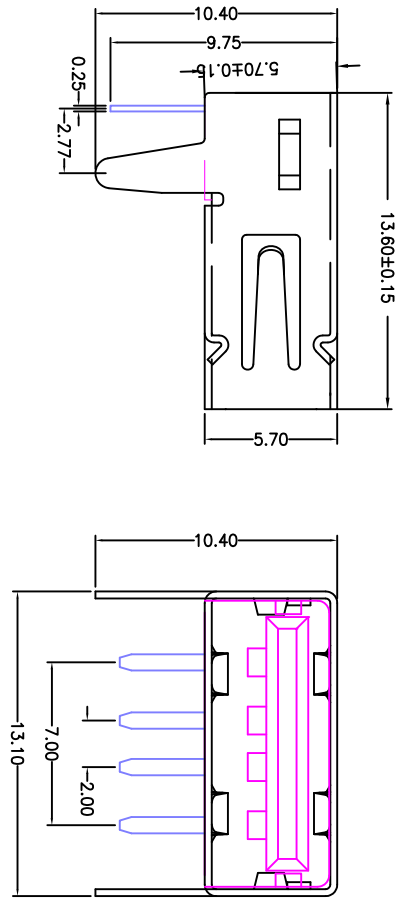

深圳市精拓金电子有限公司

产品图 PRODUCT CHART DWG		单位 UNITS		制图 DRAWING		产品料号 PRODUCT PART NO	
公差一览表 TOLERANCE UNLESS OTHERWISE		MM		Z-Y-B		JTJ-USB-AF-32	
X	±0.35	X	±5°	比例 SCALE	1:1	产品名称 PRODUCT NAME	USB-A/F无后盖直脚
.X	±0.25	.X	±2°	日期 DATE	2014/10/20	角法 DIM	ISO
.XX	±0.15	.XX	±1°	核准 APPD		版本 VER	A0
.XXX	±0.10	.XXX	±0.5°				