


PART NO.	NO.OF POS.	DIM.A	DIM.B	Cover/Red (R)		Cover/Blue (B)	
				Projection (P)	Short (S)	Projection (P)	Short (S)
DS-01	1	3.90		DS-01RP	DS-01RS	DS-01BP	DS-01BS
DS-02	2	6.44	2.54	DS-02RP	DS-02RS	DS-02BP	DS-02BS
DS-03	3	8.98	5.08	DS-03RP	DS-03RS	DS-03BP	DS-03BS
DS-04	4	11.52	7.62	DS-04RP	DS-04RS	DS-04BP	DS-04BS
DS-05	5	14.06	10.16	DS-05RP	DS-05RS	DS-05BP	DS-05BS
DS-06	6	16.60	12.70	DS-06RP	DS-06RS	DS-06BP	DS-06BS
DS-07	7	19.14	15.24	DS-07RP	DS-07RS	DS-07BP	DS-07BS
DS-08	8	21.68	17.78	DS-08RP	DS-08RS	DS-08BP	DS-08BS
DS-09	9	24.22	20.32	DS-09RP	DS-09RS	DS-09BP	DS-09BS
DS-10	10	26.76	22.86	DS-10RP	DS-10RS	DS-10BP	DS-10BS
DS-12	12	31.84	27.94	DS-12RP	DS-12RS	DS-12BP	DS-12BS

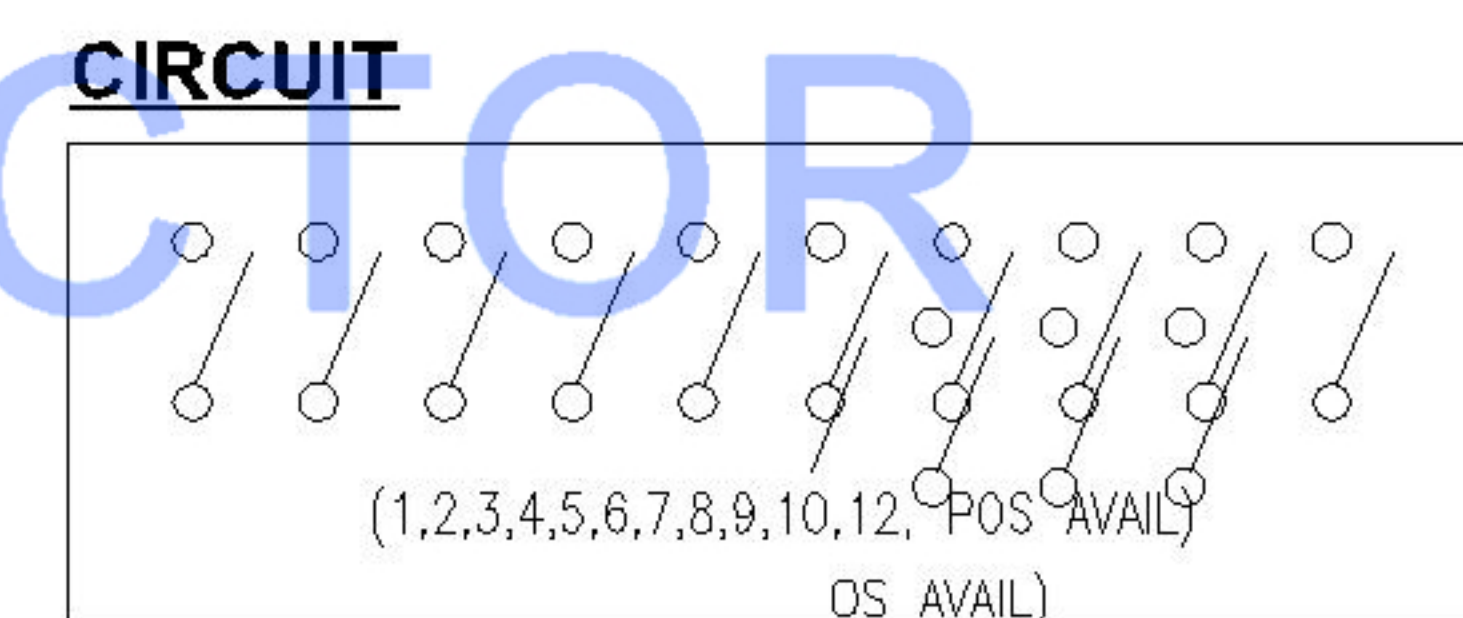

SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	50mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	500V AC/1 minute
Operating Force	1.000gf max.
Travel	2mm
Operating Life	2,000 cycles
Operating Temp.	-40°C - +85°C
Storage Temp.	-40°C - +85°C

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	SCALE: N/A	MODEL TYPE: DIP SWITCH	WEIGHT	SHEET	REVISION
ΔX					ANGULAR ±5°	DWN	PART NO.:	1.0g	1/1	A0
ΔX					L ≤ 4 ±0.2	CHKD	DWG NO.: DS-XX			
ΔX					4 < L ≤ 16 ±0.3	APPD				
					16 < L ≤ 63 ±0.4					
					L > 63 ±0.5					
REVISIONS						XKB INDUSTRIAL PRECISION CO., LIMITED				
www.xk-cd.com www.helloxkb.com www.helloxkb.cn										