


MMBTSC3356

NPN Silicon Epitaxial Planar Transistor

for microwave low noise amplifier at VHF, UHF and CATV band

The transistor is subdivided into three groups, Q, R and S, according to its DC current gain.



1. Base 2. Emitter 3. Collector
SOT-23 Plastic Package


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	20	V
Collector Emitter Voltage	V_{CEO}	12	V
Emitter Base Voltage	V_{EBO}	3	V
Collector Current	I_C	100	mA
Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{Stg}	- 65 to + 150	$^\circ\text{C}$

Characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 10\text{ V}$, $I_C = 20\text{ mA}$ Current Gain Group	Q h_{FE}	50	-	100	-
	R h_{FE}	80	-	160	-
	S h_{FE}	125	-	250	-
Collector Cutoff Current at $V_{CB} = 10\text{ V}$	I_{CBO}	-	-	1	μA
Emitter Cutoff Current at $V_{EB} = 1\text{ V}$	I_{EBO}	-	-	1	μA
Gain Bandwidth Product at $V_{CE} = 10\text{ V}$, $I_C = 20\text{ mA}$	f_T	-	7	-	GHz
Feed-Back Capacitance at $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	$C_{re}^{1)}$	-	0.55	1	pF
Noise Figure at $V_{CE} = 10\text{ V}$, $I_C = 7\text{ mA}$, $f = 1\text{ GHz}$	NF	-	1.1	2	dB








¹⁾ The emitter terminal and the case shall be connected to the guard terminal of the three-terminal capacitance bridge.



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



Dated : 04/10/2006

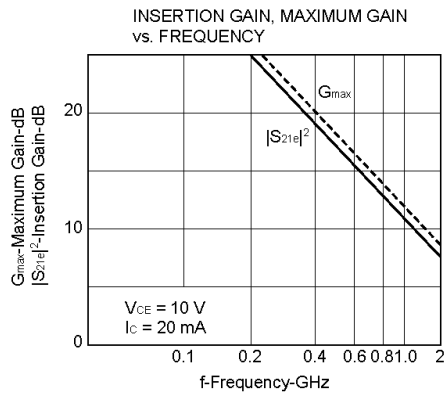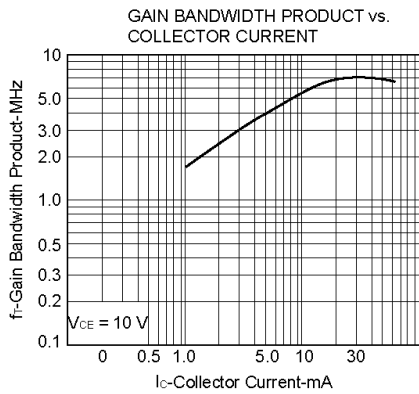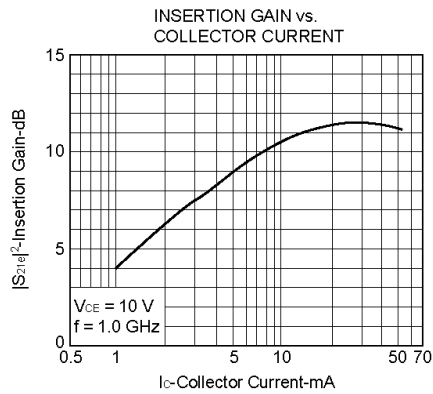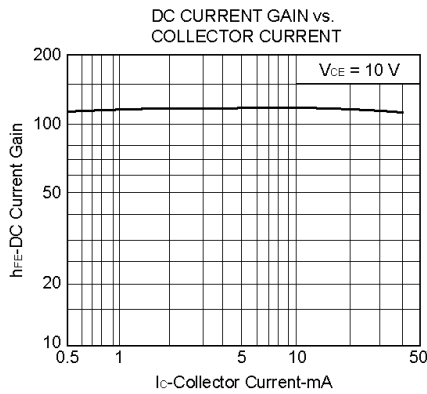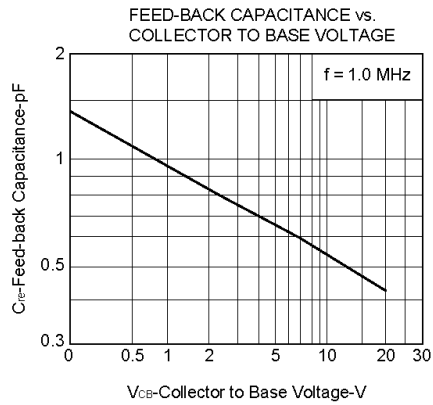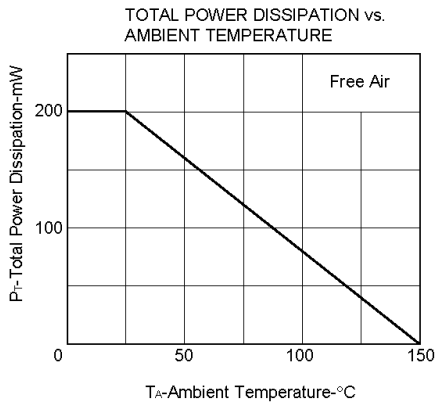

SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited

