

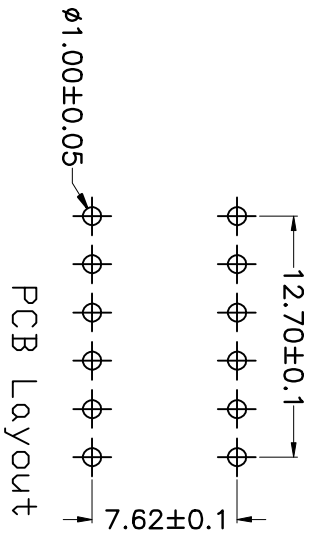
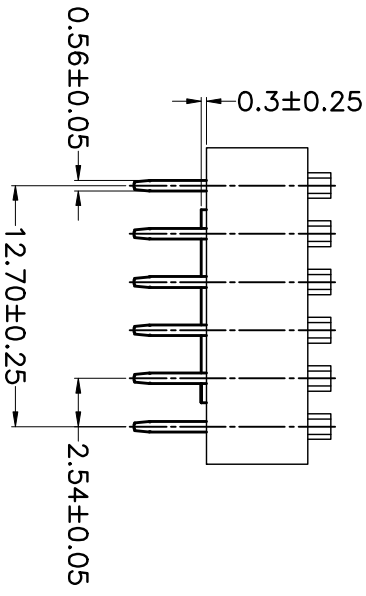
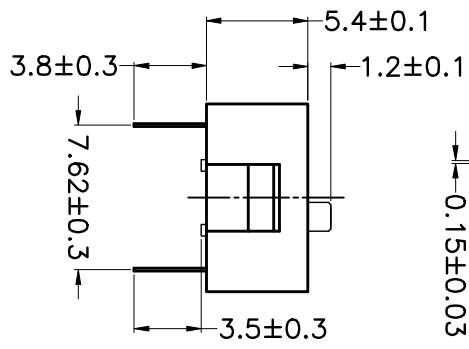
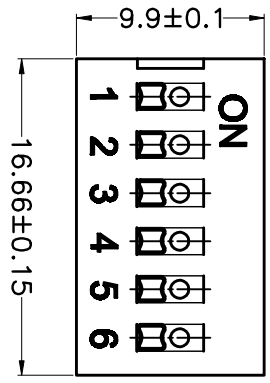


PRODUCT NO.	DSWB06LHGCT
Rohs compliant	



- Note:**
- All dimensions are in millimeters.
 - General tolerance: $\pm 0.2\text{mm}$.
 - Material:

Base: UL94V-0 PBT Thermoplastic (Black).
 Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
 Actuators: UL94V-0 PA66 Thermoplastic (White).
 Contact plating: Gold plating over nickel.
 Pitting material: Epoxy.

4. Electrical
 Electrical: 2000 Operations per switch 24/VDC, 25mA.
 Non-Switching Rating: 100mA, 50/VDC.
 Switching Rating: 25mA, 24/VDC
 Contact Resistance: 100 mΩ Max at initial.

5. Mechanical
 Mechanical life: 2000 Operations per switch.
 Stroke: 2.0mm.
 Operation Temp: -20°C to 70°C.
 Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS WB 06 L H G E T

- [Packing: T=Tube R=Reel]
- [Finish: G=Full Gold S=Contact Gold-plated Terminal-Tin-Plated]
- [Terminal: S=SMD type H=Strait:.....]
- [Actuator: T=Tepe sealed S=Low profile W/O Tepe L=Extension]
- [HP=Half-Pitch IC=IC type PV=Piano type WB=WB type]

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.30	0 ± 1°	[Symbol]	
.00 ± 0.20	.0 ± 0.5°		
.000± 0.10	.00±		
DESIGN	LU ER XIN	2013/07/02	
DRAWING			
CHECK			
APPRO.			
TITLE		BY DSMB SERIES PITCH 2.54mm	
PRODUCT FAMILY DSMB SERIES		PRAT NO. DSWB06LHGCT	
FILE NO.	DSWB06LHGCT-A	SIZE	UNIT
CHECK	SCALE	SHEET	REV.
A4	mm	FIT	TOP-1 A



东莞市 睿实业有限公司
 Dongguan Kingtek Industrial Co., Ltd.