



**KM series**

Part number	KM470M450J250A	
Capacitance	47	μF
Voltage	450	VDC
Surge Voltage	495	VDC
Capacitance Tolerance (@ +20°C)	±20	%
Ripple current (max, @120Hz,+105°C)	305	mA
Dissipation factor(tanδ @120Hz, +20°C)	17	%
Leakage Current (max, @ +20°C)*	635	μA
Size	16x25	mm
Operating temperature	-25 to 105	°C
Endurance	2000	h



L.C.: After 1 min. with rated working voltage applied.

Test conditions	Endurance	Shelf Life
Duration time	2000h @ 105°C	1000h @ 105°C
Applied voltage	Rated DC working voltage, $I_R$	None
After test requirements (+20°C):		
Capacitance change	$\leq \pm 20\%$ of initial measured value	
Dissipation factor change	$\leq 200\%$ of the initial specified value	
Leakage current	$\leq$ the initial specified value	
comment	Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 min.	

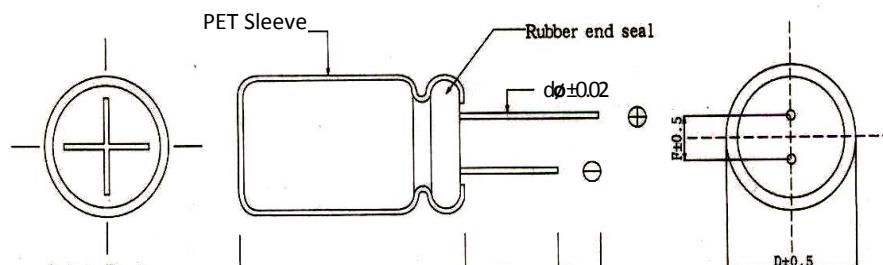

D	16
L	25
F	7.5
dφ	0.8

Series	Cap	Tol.	Voltage	Case D	Case L	Type	Lead Treatm.	Special
1_2	3_4_5	6	7_8_9	10	11_12_13	14	15_16	17_18_19_20
<b>KM</b>	<b>470</b>	<b>M</b>	<b>450</b>	<b>J</b>	<b>250</b>	<b>A</b>	<b>A</b>	
	=47μF	=±20%	=450V	=16mm	=25mm	A=standard	no request	
	...							