


主要技术性能		公差
额定电流	DC 30V\3.0A	X.±0.20
接触电阻	≤0.03Ω	.X±0.10
绝缘电阻	≥100MΩ	.XX±0.05
耐压	AC500V(50Hz)/min	.XXX±0.02
插拔力	3-20N	X°±5°
使用温度范围	-30-70℃	.X°±2°
使用寿命	5000次	.XX±1°

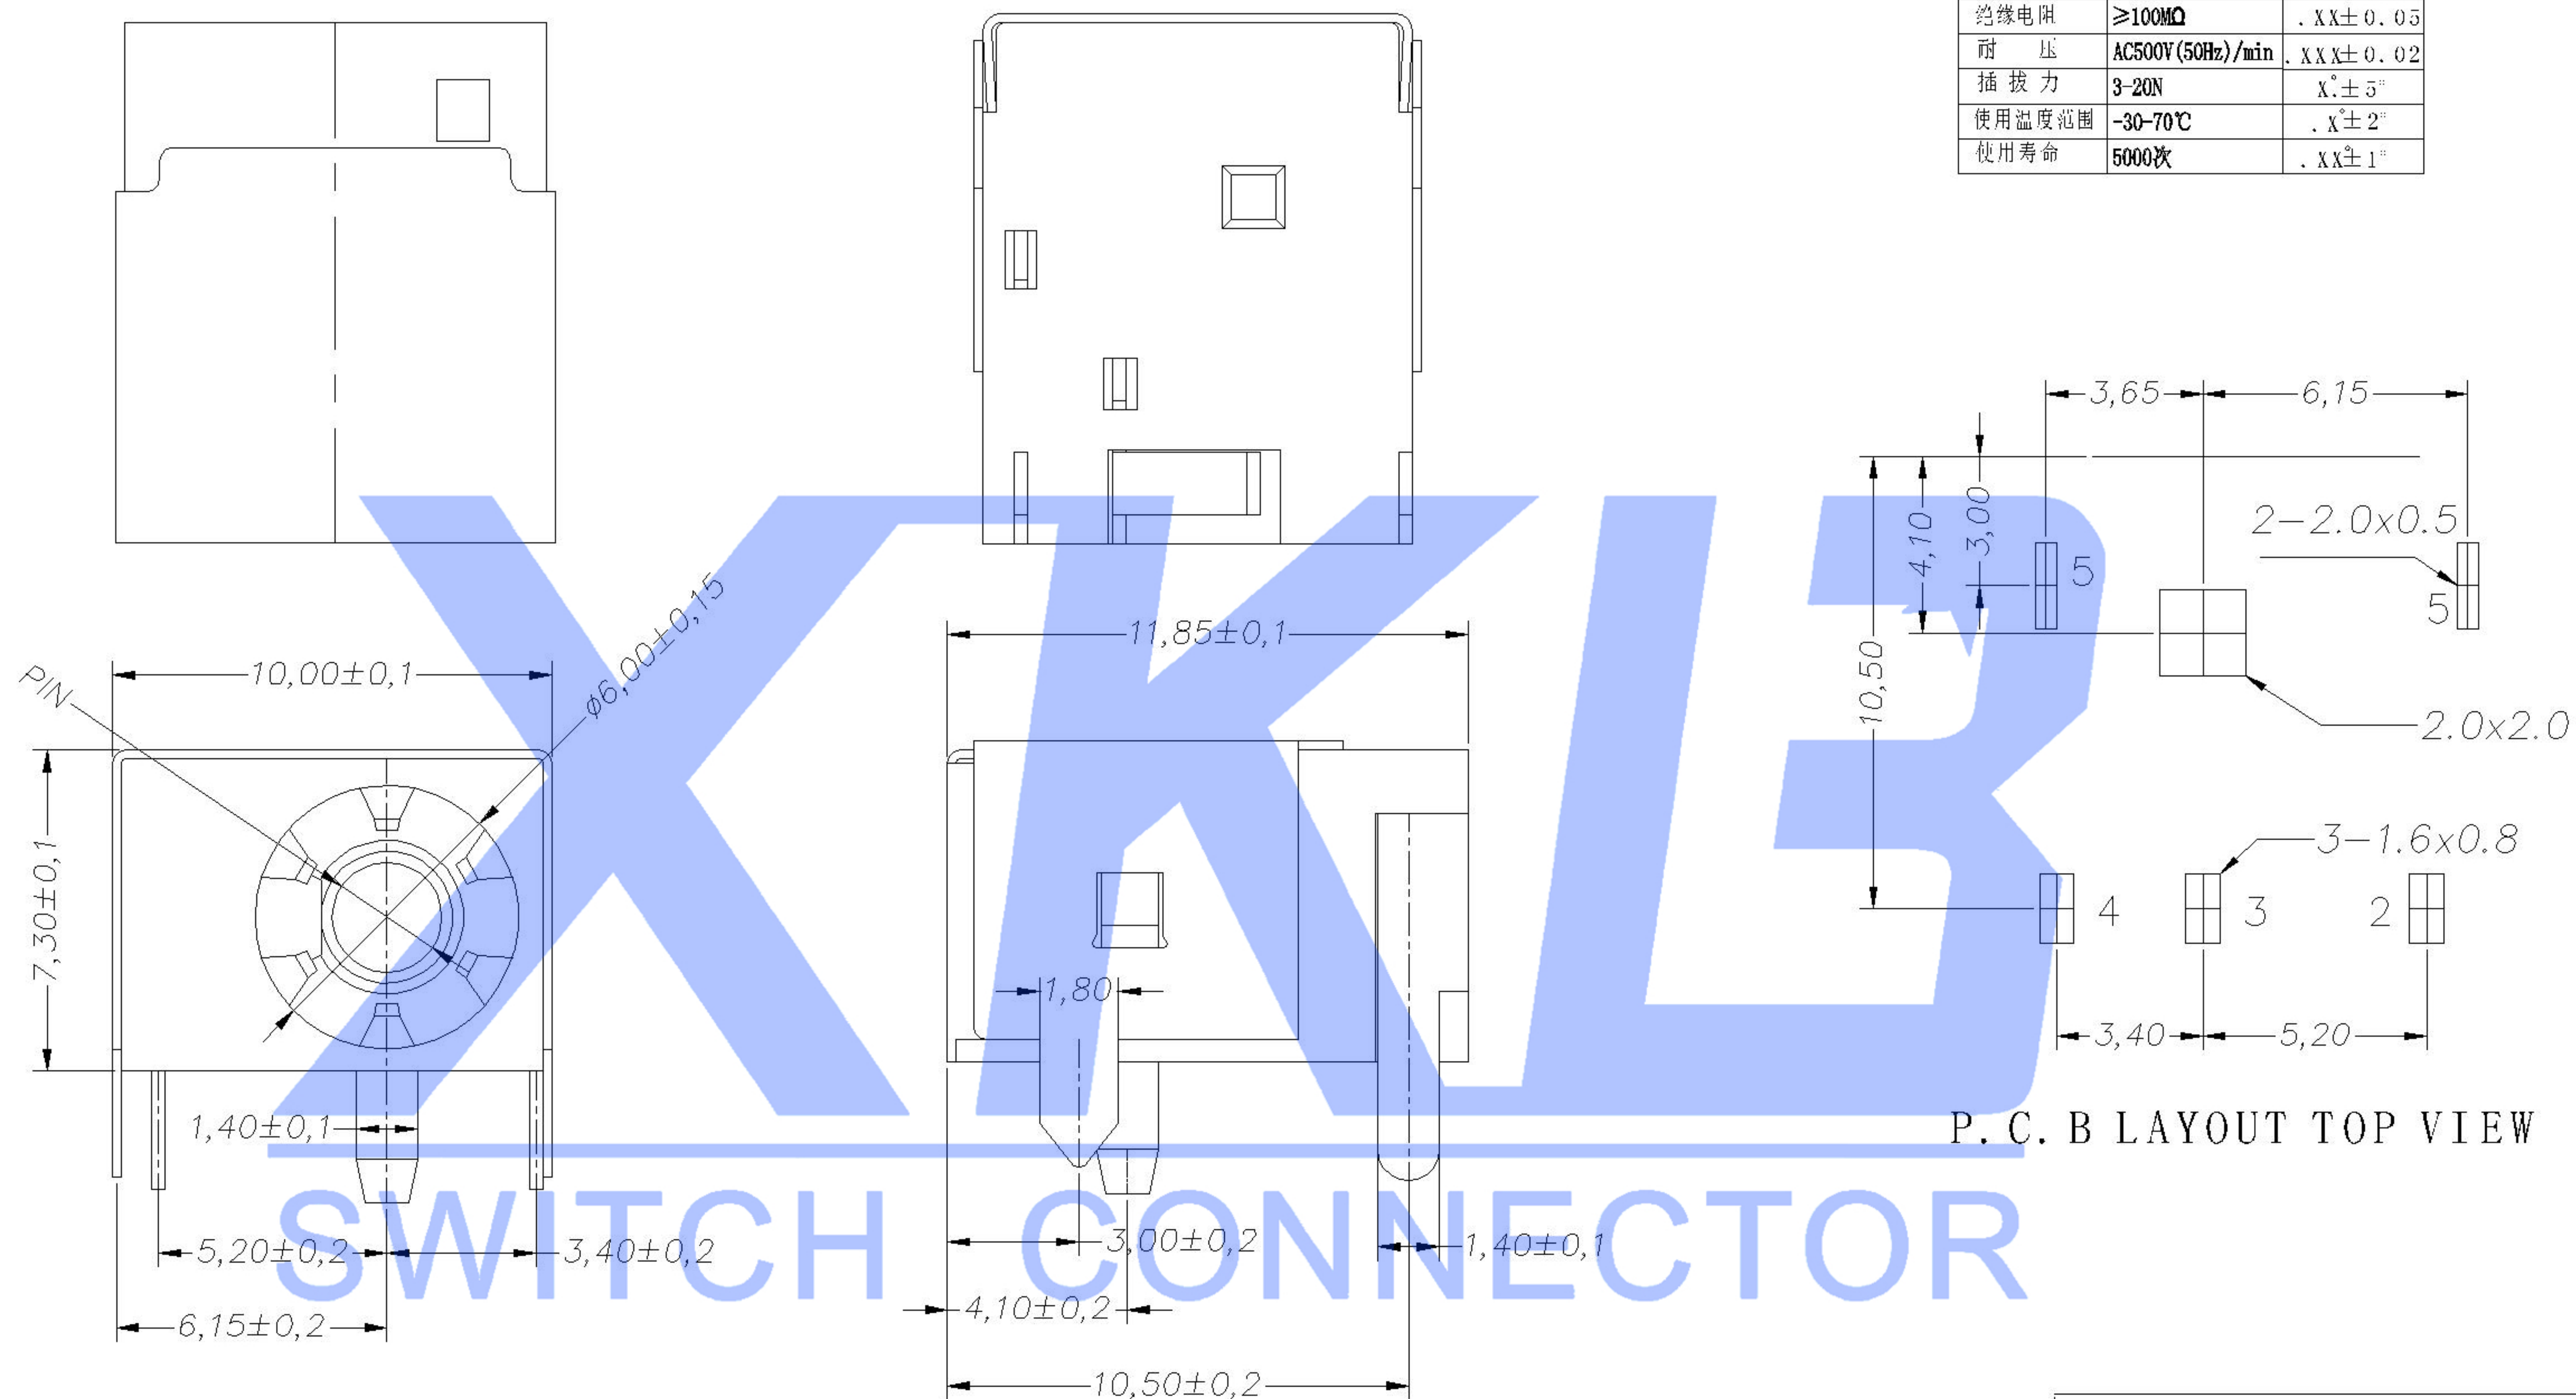

P. C. B LAYOUT TOP VIEW

	MATERIAL	PLATING
center pin	brass	nickel
terminal 1	brass	silver
terminal 2	copper alloy	silver
terminal 3	brass	silver
plastic	PBT	

REVISIONS					UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: DC POWER JACK		
ΔX					ANGULAR		DATE	VIEW:	PART NO.:		
ΔX					L ≤ 4	±5°	DATE	UNIT: mm	DWG NO.:		
ΔX					4 < L ≤ 16	±0.2	DATE	SIZE: A4	DC-044A-2.5A-2.0		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16 < L ≤ 63	±0.3	DATE				
					L > 63	±0.4	DATE				
						±0.5					
					XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT	SHEET	REVISION
									1.0g	1/1	A0