


外壳后盖内扣卡点

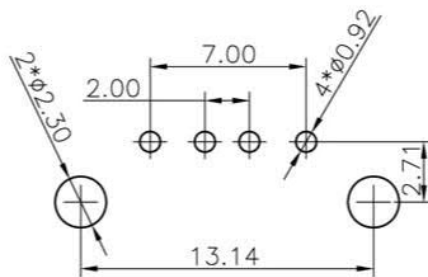

PCB.LAYOUT

TOL: ± 0.05

备注:

电气性能:

接触阻抗:

30 毫欧 (最大)

绝缘阻抗:

1000 兆欧 (最小)

耐高压:

500V AC 一分钟

材料:

胶芯:

PBT/LCP

端子:

黄铜C2680

外壳:

黄铜C2680/SPCC


电镀:

端子:

接触区域镀金1u",
焊接区镀亮锡40u"MIN

外壳:

全区域镀镍40u"MIN



技术详询

型号: KH-AF90DIP-112

TOLERANCE UNLESS OTHERWISE SPECIFIED
.XXX ±0.10
.XX ±0.20
.X ±0.30
.X* ±3°

产品名称	AF 90度DIP内扣型	
PART NAME:		
料号	See Table	C
PART No:		

REV:	DESCRIPTION	REV BY	APPROVED	DATE	MAIL:	SEE SPECIFICATION	APPROVED
					PROJECTION:	THIRD ANGLE PROJECTION	CHECKED
					UNIT:	SCALE	REV (NO)
					mm	1:1	A
						SHEET	DRAWN
						1 OF 1	DATE
							LiTao
							2010.12.21

深圳市金航标电子有限公司