
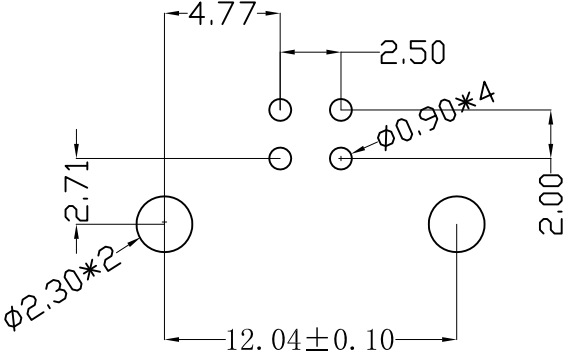
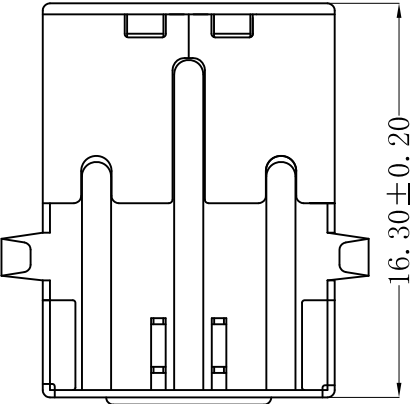
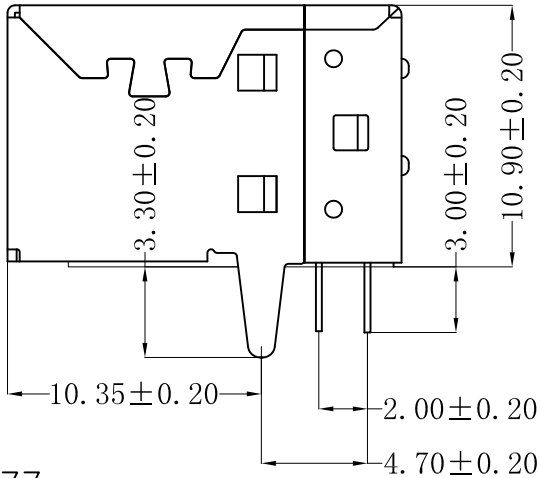


MAPX	MODIFICATION	DATE

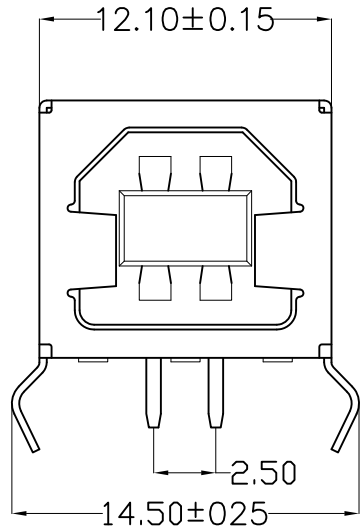

P. C. B. LAYOUT

- 特性: Specifications:
 电器: Electrical:
- 接触阻抗: Contact Resistance
30 milliohms MAX
 - 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
 - 绝缘抗阻: Insulation Resistance
1000MEGA ohms MIN

- 材料: Material:
- 塑胶: Housing: High Temperature Thermoplastic
 - 端子: Contact: Copper Alloy 铜合金
 - 铁壳: Shell: Copper Alloy 铜/铁合金
- 电镀: Finish:
- 端子: Contact: Plated Gold in Mating Area:
Tin On Solder Tails
接触点镀金, 脚镀锡
 - 铁壳: Shell:

Nickel Plating 镀镍

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司						
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	邱建辉	制图料号 PRODUCT PART NO.	921-111A1010D10200	
X.	±0.25	X.	±5°	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NAME	BF 90度弯脚铁壳白胶	
.X	±0.20	.X	±2°	日期 DATE	2016.05.11	核准 APPD	黄国荣	角法 VIEW	版本 VER	AD
.XX	±0.15	.XX	±1°							
.XXX	±0.05	.XXX	±0.5°							