




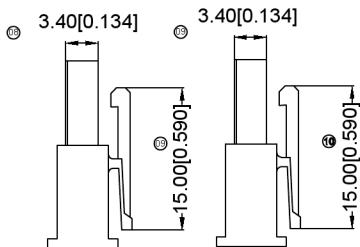





XKB



XKB

Specifications:

规格:

- Voltage rating: 600V AC/DC
- 额定电压: 600V AC/DC
- Current rating: 9A AC/DC
- 额定电流: 9A AC/DC
- Withstanding voltage: 1500V AC/minute
- 耐受电压: 1500V AC/分钟
- Temperature range: -25°C~+85°C
- 温度范围: -25°C~+85°C
- Insulation resistance: ≥1000MQ
- 绝缘电阻: ≥100MQ
- Contact resistance: ≤10mΩ
- 接触电阻: ≤10mΩ
- After environmental testing: ≤20mΩ
- 环境测试后: ≤20兆欧

X9357HM-XX-XX-XX-XX

- 01 Series No.
- 02 Category: H-HSG
- 03 Welding Board Angle: M-Male housing
- 04 RowNo.-PinNo.: XX-02P-16P
- 05 Pluig the Pin & special No.:
- 06 Material: N0-PA66 94V-0; N2-PA66 94V-2
- 07 Color: Blank-Natural Color

| Poles | Dimensions(mm) | | |
|-------|----------------|-------|-------|
| | A | B | C |
| 02 | 4.20 | 9.60 | 7.50 |
| 03 | 8.40 | 13.80 | 11.60 |
| 04 | 12.60 | 18.00 | 15.80 |
| 05 | 16.80 | 22.20 | 20.20 |
| 06 | 21.00 | 26.40 | 24.10 |

| | | | |
|-------------------------|----------------|-----------------------|-----------------------|
| X9357HM-XX-N2 | Nylon 66 94V-2 | X9357TF | X9357W Or 9357H |
| X9357HM-XX-N0 | Nylon 66 94V-0 | | |
| 广东星坤科技股份有限公司 PART NO | Material | Suitable XKB Terminal | Suitable XKB Terminal |

| | |
|-------|---|
| 生 | 日 |
| 发 | 期 |
| Δ | |
| 文件工程章 | |

| REVISIONS | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|-----------|------|---------|----------|------------------------|
| | | | | |

| | | | | |
|---------------------------------------|------|------|-------------|---|
| XKB | DSND | DATE | SCALE: NA | MODEL TYPE: X9357HM-XX-XX |
| | DWNN | DATE | VIEW: | PART NO.: 2.40mm Crimp Style Connectors |
| | CHKD | DATE | UNIT: mm/in | DWG NO.: |
| | APPD | DATE | SIZE: A4 | |
| XKB INDUSTRIAL PRECISION CO., LIMITED | | | | WEIGHT: 1.0g |
| | | | | SHEET: 1/1 |
| | | | | REVISION: A0 |