




# CRA-Series Thick Film Array Chip Resistor Product Specifications

Document No.	S-10-12-02-06
Released Date	2021/07/13
Page No.	1/10

## ■ Thick Film Array Chip Resistor — CRA Series

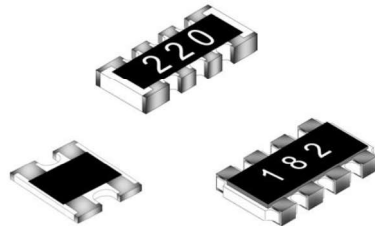

### ■ Application

- Entertainment: Stereo, TV tuners, Tape recorder
- Appliance: Air conditioner, Refrigerator
- Computer & relative products: Main board, PDA
- Communication equipment: Cell phone, Fax machine
- Power equipment: Power supply, Illumination equipment
- Measuring instrument: Electric meter, Navigation equipment

### ■ Features

- Small size and light weight
- Reduction of assembly costs and matching with placement machines
- Reliability, high quality and fast delivery

### ■ Parts Number Explanation

#### ■ Example:

CRA	024R	J	10R0	Q	10	Z
Product Type	Size (Inch)	Resistor Tolerance	Resistor Value	Package	Quantity	Optional
CRA	022R(0402*2) 024R(0402*4) 034R(0603*4) 064R(1206*4)	F : ±1% J : ±5%	1R=1R00 10R=10R0 100R=100R 1K=1K00 1M=1M00	P : Paper Taping (034R) Q : Paper Taping (022R、024R) E : Embossed Taping	04 : 4000PCS 05 : 5000PCS 10 : 10000PCS	



## CRA-Series Thick Film Array Chip Resistor Product Specifications

Document No.	S-10-12-02-06
Released Date	2021/07/13
Page No.	2/10


### ■ Standard Electrical Specifications

Type \ Item	Rating Power at 70°C	Max Working Voltage	Max Overload Voltage	T.C.R. (PPM/°C)	Resistance Range	Operating Temperature
					F(±1%) J(±5%)	
CRA022R	0.063 W	25V	50V	±400	$1\Omega \leq R < 10\Omega$	-55°C ~ +155°C
				±200	$10\Omega \leq R \leq 1M\Omega$	
CRA024R	0.063 W	25V	50V	±400	$1\Omega \leq R < 10\Omega$	
				±200	$10\Omega \leq R \leq 1M\Omega$	
CRA034R	0.1 W	50V	100V	±400	$1\Omega \leq R < 10\Omega$	
				±200	$10\Omega \leq R \leq 1M\Omega$	
CRA064R	0.25 W	200V	400V	±400	$1\Omega \leq R < 10\Omega$	
				±200	$10\Omega \leq R \leq 1M\Omega$	

- For non-standard parts, please contact our sales dept.
- Operating Temperature Range : -55°C ~ +155°C.

Type	022R	024R	034R	064R
Jumper Rated Current	1A			2A

■ Type Dimension

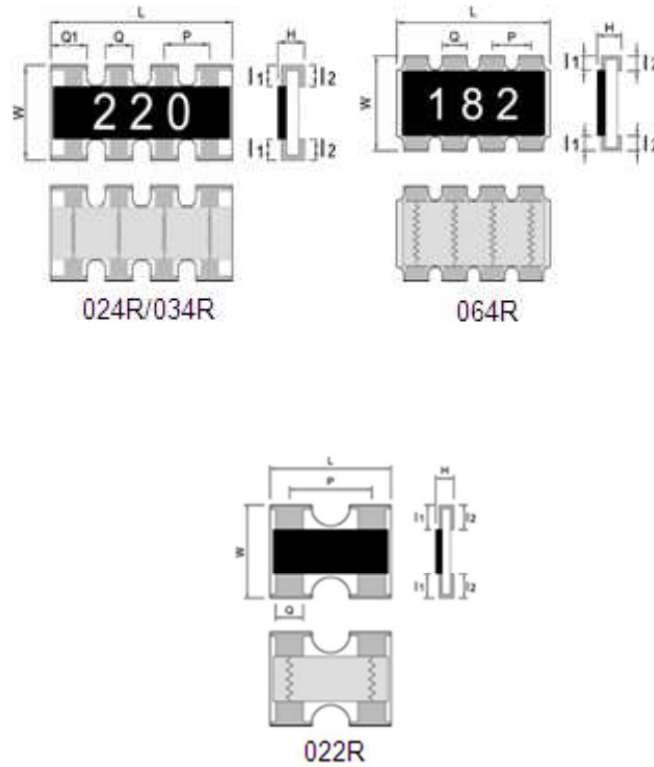


■ Dimension

Unit: mm

TYPE	L	W	H	I <sub>1</sub>	I <sub>2</sub>	P	Q	Q1
CRA022R	1.00±0.10	1.00±0.10	0.33±0.05	0.15±0.10	0.25±0.10	0.67±0.10	0.34±0.10	---
CRA024R	2.00±0.10	1.00±0.10	0.40±0.10	0.20±0.10	0.20±0.10	0.50±0.10	0.30±0.10	0.43±0.10
CRA034R	3.20±0.20	1.60±0.15	0.50±0.10	0.30±0.20	0.30±0.20	0.80±0.20	0.50±0.15	0.61±0.10
CRA064R	5.10±0.20	3.10±0.20	0.55±0.15	0.55±0.15	0.55±0.15	1.30±0.20	0.90±0.10	---

● **General Information**

■ **Recommend Land Pattern Design ( For Reflow Soldering )**

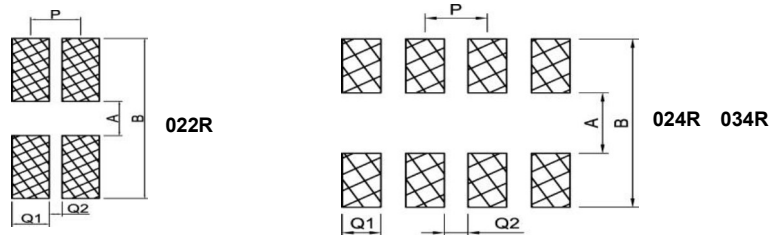


■ **Dimension**

Unit: mm

Type	022R	024R	034R	064R
A	0.50	0.50	1.00	2.00
B	2.00	2.00	2.60	4.75
P	0.67	0.50	0.80	1.30
Q1	0.33	0.28	0.40	0.90
Q2	0.34	0.22	0.40	0.375

■ **Performance Characteristics**

■ **Power Derating Curve**

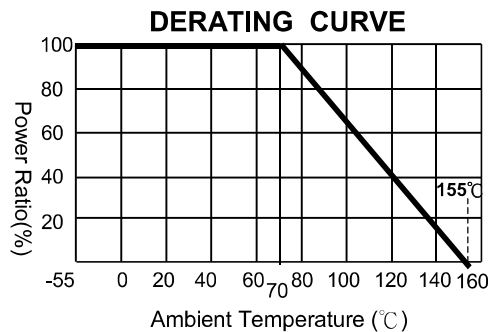

Power rating or current rating is in the case based on continuous full-load at ambient temperature of 70°C .  
For operation at ambient temperature in excess of 70°C , the load should be derated in accordance with figure of derating Curve.

■ **Voltage Rating or Current Rating**

Resistance Range:  $\geq 1\Omega$

Rated Voltage: The resistor shall have a DC continuous working voltage or a RMS AC continuous working voltage at commercial-line frequency and wave form corresponding to the power rating, as determined formula as following:

$$E(RCWV) = \sqrt{P \times R}$$

E=Rated voltage(V)  
P=Power rating(W)  
R=Nominal resistance( $\Omega$ )



# CRA-Series Thick Film Array Chip Resistor Product Specifications


Document No.	S-10-12-02-06
Released Date	2021/07/13
Page No.	5/10

## ● Reliability Test and Requirement


Test Item	Test Method	Procedure	Requirements
Temperature Coefficient of Resistance (T.C.R)	JIS C 5201-1 clause 4.8	-55°C or +155°C, 25°C is the reference temperature	Refer to Ratings
Short Time Overload	JIS C 5201-1 clause 4.13	2.5 times RCWV or Max. Overload voltage whichever is less for 5 seconds.	1% : $\pm(1.0\%+0.05\Omega)$ 5% : $\pm(2.0\%+0.10\Omega)$
Leaching	JIS-C-5201-1 4.18 IEC-60068-2-58 8.2.1	260 $\pm$ 5°C for 30 seconds.	Individual leaching area $\leq$ 5% Total leaching area $\leq$ 10%
Resistance to Soldering Heat	JIS-C-5201-1 4.18 IEC-60115-1 4.18	260 $\pm$ 5°C for 10 seconds.	1% : $\pm(0.5\%+0.05\Omega)$ 5% : $\pm(1.0\%+0.05\Omega)$
Rapid Change of Temperature	JIS-C-5201-1 4.19 IEC-60115-1 4.19	-55°C to +155°C, 5 cycles	1% : $\pm(0.5\%+0.05\Omega)$ 5% : $\pm(1.0\%+0.10\Omega)$
Resistance to Solvent	JIS-C-5201-1 4.29	The tested resistor be immersed into isopropyl alcohol of 20~25°C for 60 secs. Then the resistor is left in the room for 48 hrs.	1% : $\pm(0.5\%+0.05\Omega)$ 5% : $\pm(0.5\%+0.05\Omega)$
Damp Heat with Load	JIS-C-5201-1 4.24 IEC-60115-1 4.24	40 $\pm$ 2°C, 90~95% R.H. RCWV or Max. working voltage whichever is less for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF" .	1% : $\pm(1.0\%+0.05\Omega)$ 5% : $\pm(2.0\%+0.05\Omega)$
Load Life (Endurance)	JIS-C-5201-1 4.25 IEC-60115-1 4.25.1	70 $\pm$ 2°C, RCWV or Max. working voltage whichever is less for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF" .	1% : $\pm(1.0\%+0.05\Omega)$ 5% : $\pm(3.0\%+0.10\Omega)$
Insulation Resistance	JIS-C-5201-1 4.6 IEC-60115-1 4.6	Apply 100VDC for 1 minute.	$\geq$ 10G $\Omega$

## ■ Recommended Customer Soldering Parameters

### ■ Wave solder Temperature condition

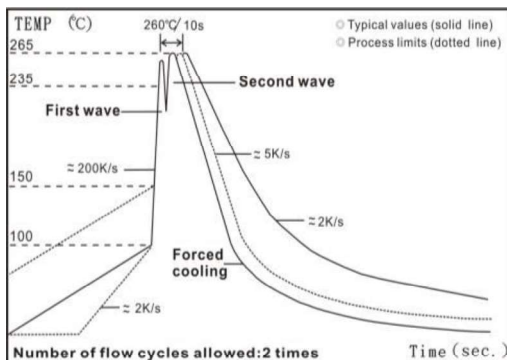

■ **Solder reflow Temperature condition**

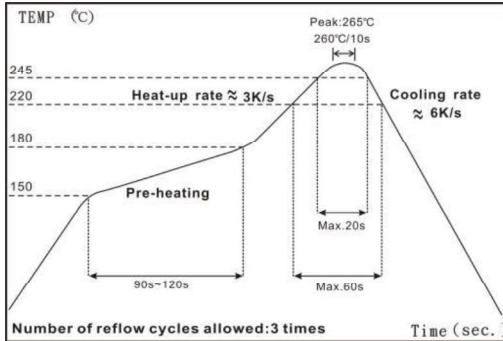

■ **Rework temperature (hot air equipment) : 350°C, 3~5seconds**


■ **Recommended reflow methods**

IR, vapor phase oven, hot air oven

If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

■ **Appendix For SMD Chip Resistor**

● **Packaging Information**

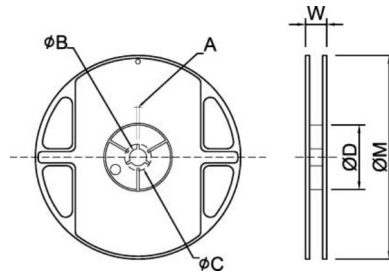

■ **Dimension**

**Unit: mm**


TYPE	SIZE		A	φ B	φ C	φ D	W	φ M
022R/024R	7"	10K/Reel	2.0±0.5	13.5±1.0	21±1.0	60±1.0	11.5±2.0	178±2.0
034R	7"	5K/Reel	2.0±0.5	13.5±1.0	21±1.0	60±1.0	11.5±2.0	178±2.0
064R	7"	4K/Reel	2.0±0.5	13.5±1.0	21±1.0	60±1.0	16.0±2.0	178±2.0



# CRA-Series Thick Film Array Chip Resistor Product Specifications

Document No.	S-10-12-02-06
Released Date	2021/07/13
Page No.	7/10


## ■ Tapping Specification

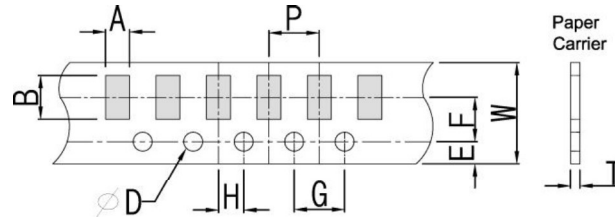

## ■ Dimension

Unit: mm

Packaging	Type	A	B	W	E	F	G	H	T	$\phi D$	P
Paper Type	022R	1.25±0.1	1.25±0.1	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	2.0±0.05	0.45±0.1	+0.10 -0	2.0±0.1
	024R	1.20±0.1	2.20±0.1	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	2.0±0.05	0.60±0.1		4.0±0.1
	034R	1.90±0.2	3.50±0.2	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	2.0±0.05	0.75±0.1	4.0±0.1	

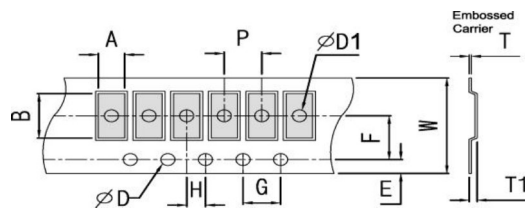

## ■ Dimension

Unit: mm

Packaging	Type	A	B	W	E	F	G	H	T	$\phi D$	$\psi D1$	T1	P
Embossed Type	064R	3.55±0.2	5.55±0.2	12±0.3	1.75±0.1	5.5±0.05	4.0±0.1	2.0±0.05	0.25±0.1	+0.10 -0	+0.25 -0	0.85±0.15	4.0±0.1




# CRA-Series Thick Film Array Chip Resistor Product Specifications


Document No.	S-10-12-02-06
Released Date	2021/07/13
Page No.	8/10

## ■ Packing Material Data/Storage Data

### ■ Front & Back Lead Dimension

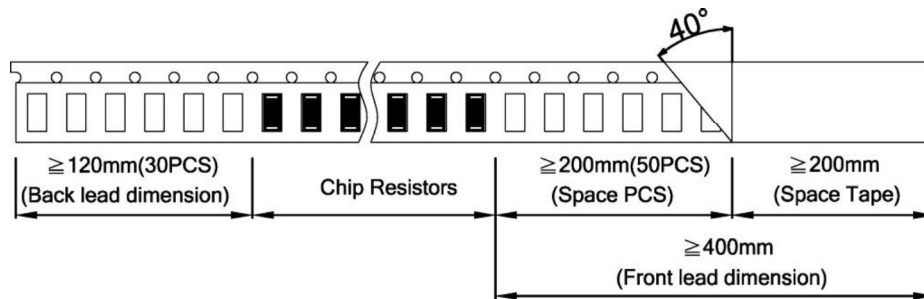


### ■ Top Adhesive Peel Off Strength : 10~70g

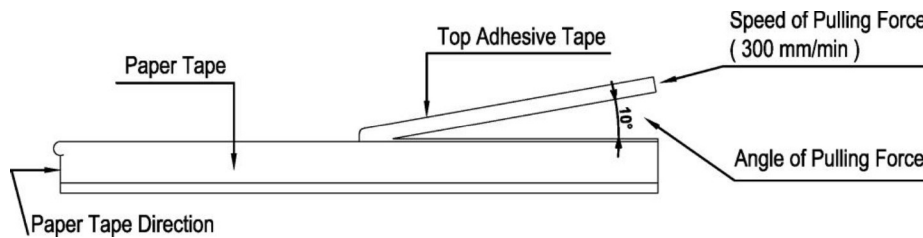


### ■ Package

Inner Box Size	
Reel	Size H(mm)
1	13
2	24
3	36
5	60
10	113



External Box Size			
Contain (Kpcs)	Length (mm)	Width (mm)	Height (mm)
25K	180	180	60
50K	180	180	110
150K	430	200	200
300K	400	400	200



### ■ Storage Data :

Storage time at the environment temp:  $25\pm 5^\circ\text{C}$  & humidity:  $60\pm 20\%$  is valid for one year from the date of delivery.





## **CRA-Series Thick Film Array Chip Resistor Product Specifications**

Document No.	S-10-12-02-06
Released Date	2021/07/13
Page No.	9/10

### **■ Equipments Applicable:**

Our company's products are produced under low temperature processing applicable to IR reflow surface mounting devices. It is comparatively not applicable to wave soldering which will possibly cause the risk ablating the element protection layer and the front conductor and cause the drift of the resistance value and ablation of the markings.

### **■ Product Testing Method:**

Our products are tested with our company's tapping & testing equipments by using four-foot probe to touch at the back of both electrodes. Supposed different testing points or methods are requested, please advise beforehand and customized-made production is available.



## CRA-Series Thick Film Array Chip Resistor Product Specifications

Document No.	S-10-12-02-06
Released Date	2021/07/13
Page No.	10/10

### ■ Standard Resistance Values in a Decade

Marking code:

- 5%: marking code, please refer to E24 data  
Ex: 120K, The marking code is 124 in E24
- Note: Array resistors 1%&5% code is the same.
- Note: jumper zero ohm resistor marking code is one 「0」 (except type below 022R).

E96	E48	E96	E48	E96	E48	E96	E48	E96	E48			
100	100	169	169	287	287	487	487	825	825			
102		174		294		499		845				
105	105	178	178	301	301	511	511	866	866			
107		182		309		523		887				
110	110	187	187	316	316	536	536	909	909			
113		191		324		549		931				
115	115	196	196	332	332	562	562	953	953			
118		200		340		576		976				
121	121	205	205	348	348	590	590					
124		210		357		604		<b>E24</b>	<b>E12</b>	<b>E6</b>	<b>E3</b>	
127	127	215	215	365	365	619	619	10	10	10	10	
130		221		374		634		11	12			
133	133	226	226	383	383	649	649	12				
137		232		392		665		13				
140	140	237	237	402	402	681	681	15	15	15		
143		243		412		698		16				
147	147	249	249	422	422	715	715	18	18			
150		255		432		732		20				
154	154	261	261	442	442	750	750	22	22	22	22	
158		267		453		768		24				
162	162	274	274	464	464	787	787	27	27			
165		280		475		806		30				
								33	33	33		
								36				
								39	39			
								43				
								47	47	47	47	
								51				
								56	56			
								62				
								68	68	68		
								75				
								82	82			
								91				

**According to IEC publication 630**