

2019.08.2





7 11:14:55

+08'00'

行批

**SPECIFICATION**

Current Rating : 3A  
 Insulator Resistance : 1000 MΩ min  
 Contact Resistance : 20 mΩ Max  
 Dielectric Withstanding : AC 500V  
 Operating Temperature : -40 °C to +105 °C  
 Contact Material : C5191  
 Insulator Material : Polyester, UL 94V-0  
 Standard : NL6T+30%G. F  
 Contact Plated : Gold Flash All Over Nickel

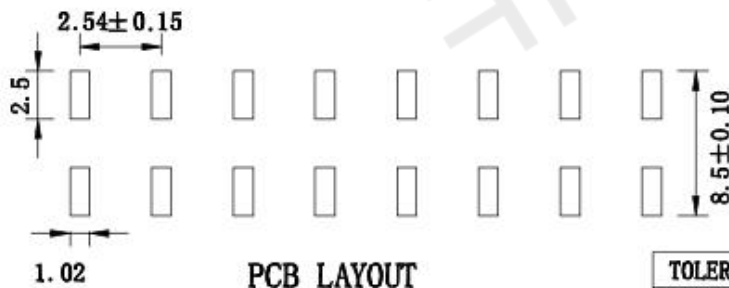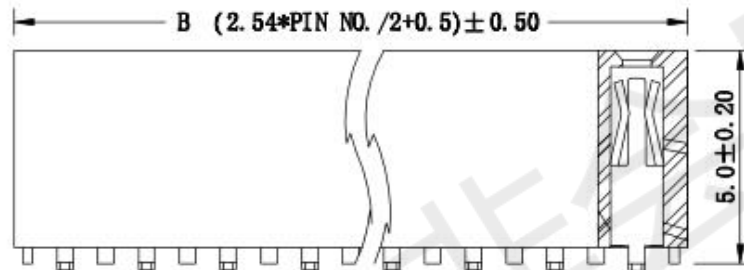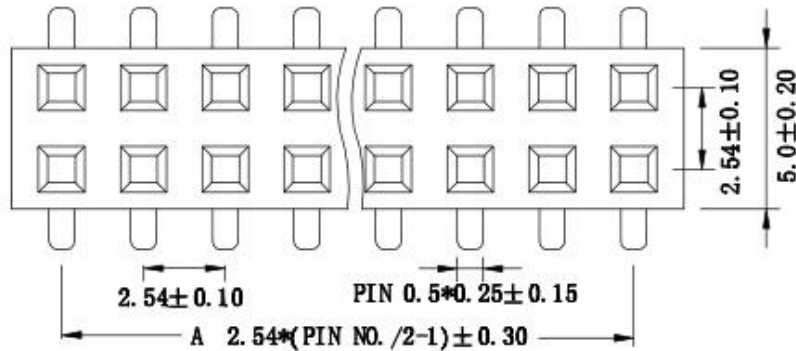

PCB LAYOUT

**TOLERANCE TABLE**

.0	±0.20
.00	±0.10
.000	±0.05

PIN NO.	DIMENSION	
	A	B
2*2	2.54	5.58
2*3	5.08	8.12
2*4	7.62	10.66
2*5	10.16	13.2
2*6	12.7	15.74
2*7	15.24	18.28
2*8	17.78	20.82
⋮	⋮	⋮
2*40	99.06	102.1

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD
CHECKED:	DATE:	
DRAWN:	DATE:	TITLE: 220SMT-2*XP H=5.0MM
LYF	2008-04-29	CLIENT P/N /
		UNIT mm SCALE free
		FILE NO. Ckmtw-220-00026 REV. A