


## Description

The PDL0501P1 is an uni-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive high-speed data lines. The PDL0501P1 has an ultra-low capacitance with a typical value at 0.8pF, and complies with the IEC 61000-4-2 (ESD) standard with  $\pm 25\text{kV}$  air and  $\pm 20\text{kV}$  contact discharge. It is assembled into an ultra-small 1.0 x 0.6 x 0.5mm lead-free DFN package. The small size, ultra-low capacitance and high ESD surge protection make PDL0501P1 an ideal choice to protect cell phone, digital visual interfaces, HDMI, DVI, USB2.0, USB3.0, and other high speed ports.

## Mechanical Characteristics

- Package: DFN1006-2 (1.0 x 0.6 x 0.5mm)
- Case Material: "Green" Molding Compound.
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminal Connections: See Diagram Below
- Marking Information: See Below

## Dimensions and Pin Configuration

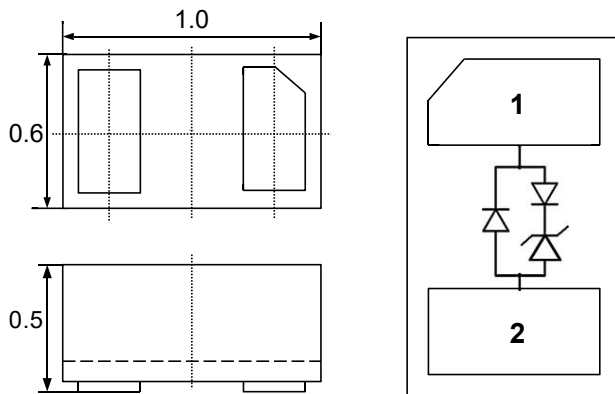


## Features

- Ultra small package: 1.0 x 0.6 x 0.5mm
- Ultra low capacitance: 0.8pF typical
- Ultra low leakage: nA level
- Operating voltage: 5V
- Low clamping voltage
- 2-pin leadless package
- Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test Air discharge:  $\pm 25\text{kV}$   
Contact discharge:  $\pm 20\text{kV}$
  - IEC61000-4-5 (Lightning) 5A (8/20 $\mu\text{s}$ )
- RoHS Compliant

## Applications

- Cellular Handsets and Accessories
- Display Ports
- MDDI Ports
- USB Ports
- Digital Visual Interface(DVI)
- PCI Express and Serial SATA Ports

## Marking Information



5U = Device Marking Code  
Bar denotes cathode

## Ordering Information

Part Number	Marking	Packaging	Reel Size
PDL0501P1	5U	10000/Tape & Reel	7 inch


**Absolute Maximum Ratings (TA=25°C unless otherwise specified)**

Parameter	Symbol	Value	Unit
Peak Pulse Power(8/20µs)	Ppk	80	W
Peak Pulse Current(8/20µs)	IPP	5	A
ESD per IEC 61000-4-2 (Air)	VESD	±25	kV
ESD per IEC 61000-4-2 (Contact)		±20	
Operating Temperature Range	TJ	-55 to +125	°C
Storage Temperature Range	Tstg	-55 to +150	°C


**Electrical Characteristics (TA=25°C unless otherwise specified)**

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	VRWM			5	V	Pin 1 to Pin 2
Breakdown Voltage	VBR	6			V	IT = 1mA, Pin 1 to Pin 2
Reverse Leakage Current	IR			0.5	µA	VRWM = 5V, Pin 1 to Pin 2
Clamping Voltage	VC			10	V	IPP = 1A (8 x 20µs pulse), Pin 1 to Pin 2
Clamping Voltage	VC			16	V	IPP = 5A (8 x 20µs pulse), Pin 1 to Pin 2
Junction Capacitance	CJ		0.8		pF	VR = 0V, f = 1MHz


**Typical Performance Characteristics (TA=25°C unless otherwise Specified)**

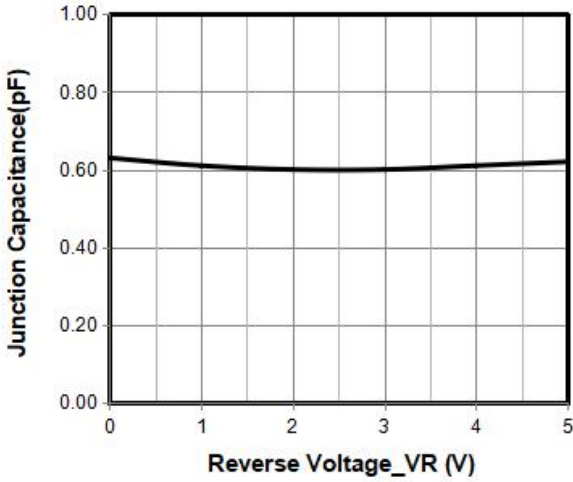


**Junction Capacitance vs. Reverse Voltage**

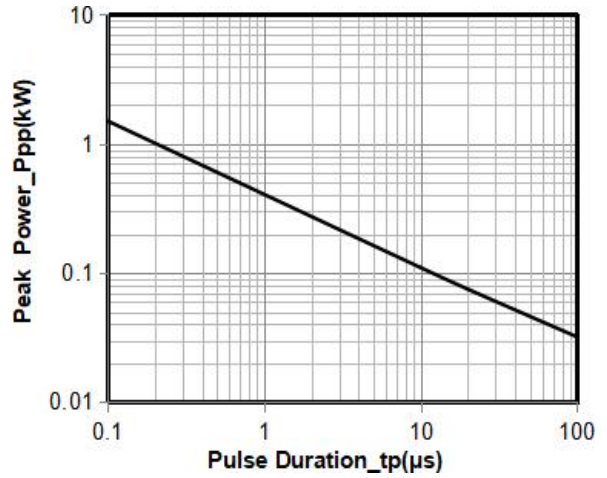


**Peak Pulse Power vs. Pulse Time**

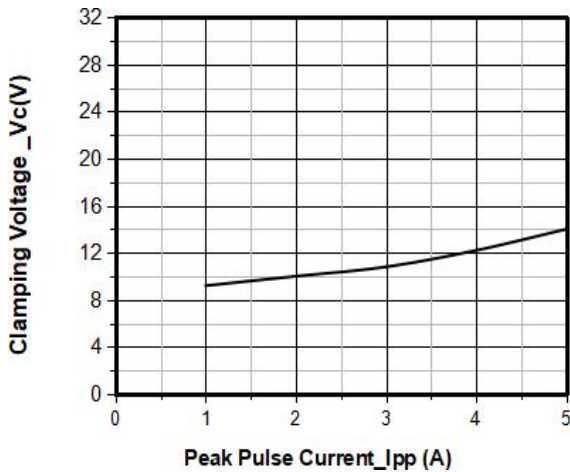


**Clamping Voltage vs. Peak Pulse Current**

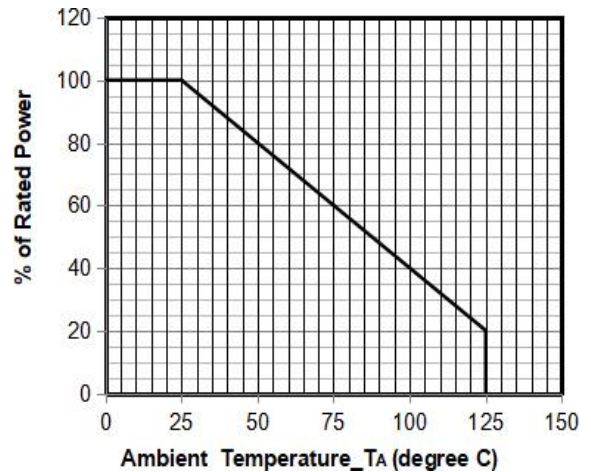

**Power Derating Curve**

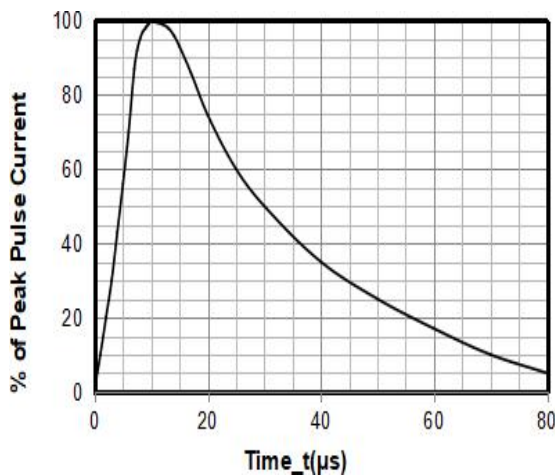

**8 X 20μs Pulse Waveform**

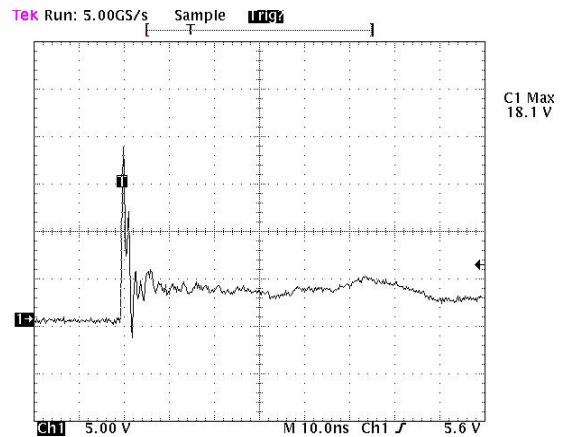


**Note: Data is taken with a 10x attenuator**

**ESD Clamping Voltage**


**8 kV Contact per IEC61000-4-2**

## DFN1006-2 Package Outline Drawing

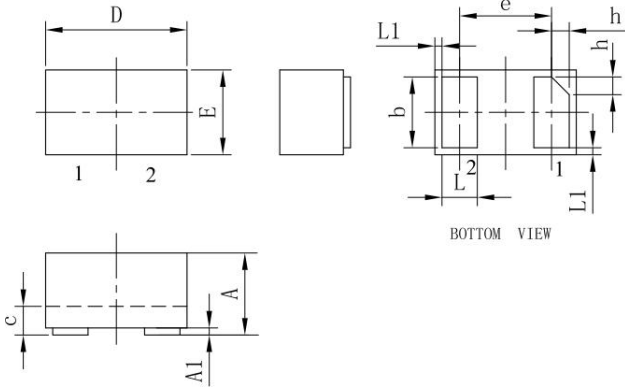

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.450	0.500	0.550	0.018	0.020	0.022
A1	0.000	0.020	0.050	0.000	0.001	0.002
b	0.450	0.50	0.550	0.018	0.020	0.022
c	0.120	0.150	0.180	0.005	0.006	0.007
D	0.950	1.000	1.050	0.037	0.039	0.041
e	0.65 BSC			0.026 BSC		
E	0.55	0.60	0.65	0.022	0.024	0.026
L	0.20	0.25	0.30	0.008	0.010	0.012
L1	0.05REF			0.002REF		
h	0.07	0.12	0.17	0.003	0.005	0.007

## Suggested Land Pattern

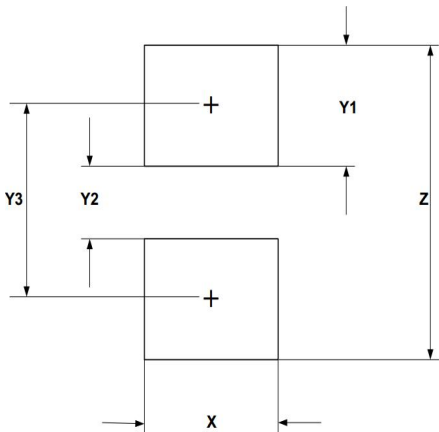

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
X	0.60	0.024
Y1	0.50	0.020
Y2	0.30	0.012
Y3	0.80	0.032
Z	1.30	0.052