


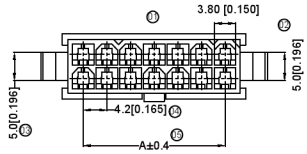





XKB




Recommend Mounting Dimension

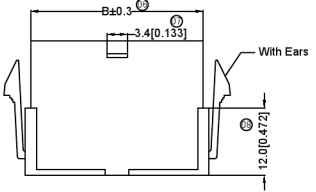

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2*01	—	5.60	2*07	25.20	30.80
2*02	4.20	9.80	2*08	29.40	35.00
2*03	8.40	14.00	2*09	33.60	39.20
2*04	12.60	18.20	2*10	37.80	43.40
2*05	16.80	22.40	2*11	42.00	47.60
2*06	21.00	26.60	2*12	46.20	51.80

**Specifications:**  
 规格: XKB  
**Voltage rating: 600V AC/DC**  
 额定电压: 600V AC/DC  
**Current rating: 9A AC/DC**  
 额定电流: 9A AC/DC  
**Withstanding voltage: 1500V AC/minute**  
 耐受电压: 1500V AC/分钟  
**Temperature range: -25°C +85°C**  
 温度范围: -25°C +85°C  
**Insulation resistance: ≥1000MΩ**  
 绝缘电阻: ≥1000MΩ  
**Contact resistance: ≤10mΩ**  
 接触电阻: ≤10mΩ XKB  
**After environmental testing: ≤20mΩ**  
 环境测试后: ≤20mΩ

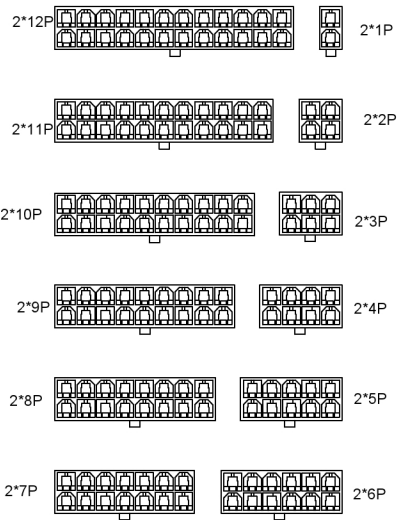

X9357 H F - 2 \* XX X - XX XX  
 ① ② ③ ④ ⑤

- ① Series No.
- ② Category: H-HSG
- ③ Welding Board Angle: F-Female
- ④ Row No. - Pin No.: 2\*XX-2\*01P~2\*12P
- ⑤ Plug the Pin & special No.:  
 I-Without the Wing; G-With the Wing  
 ⑥ Material: N0-PA66 94V-0; N2-PA66 94V-2  
 ⑦ Color: Blank-Natural Color BK-Black

广东星坤科技股份有限公司

生 日期  
 日期  
 文件工程章  
 REVISIONS  
 www.helxkb.com



X9357HF-2*XX-N2BK	Nylon 66 94V-2 Black	X9357TM	X9357W Or 9357H	Without Ears
X9357HF-2*XXG-N2	Nylon 66 94V-2			With Ears
X9357HF-2*XXI-N2	Nylon 66 94V-2			Without Ears
X9357HF-2*XXG-N0	Nylon 66 94V-0			With Ears
X9357HF-2*XXI-N0	Nylon 66 94V-0			Without Ears
PART NO	Material			Suitable XKB Terminal

XKB	DSND	DATE	SCALE: NA	MODEL TYPE:
DWNN	DATE	VIEW:	X9357HF-2*XXG-N2	
CHKD	DATE	UNIT: mm/in	PART NO.:	2.40mm Crimp Style Connectors
APPD	DATE	SIZE: A4	DWG NO.:	
UNSPECIFIED TOLERANCES				WEIGHT
XKB INDUSTRIAL PRECISION CO., LIMITED				SHEET
				REVISION
				1.0g
				1/1
				A0