

**Surface Mount Schottky Barrier Rectifier**
**Reverse Voltage - 100 V Forward Current - 0.5 A**

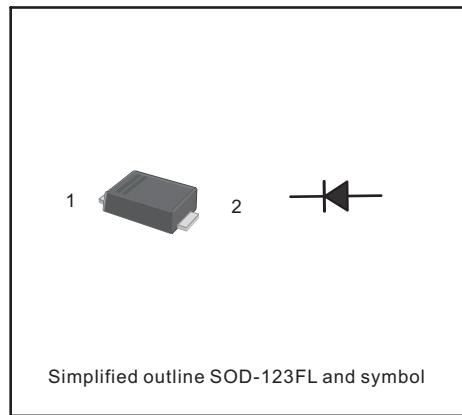
| PIN | DESCRIPTION |
|-----|-------------|
| 1   | Cathode     |
| 2   | Anode       |

**FEATURES**

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

**MECHANICAL DATA**

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00048oz

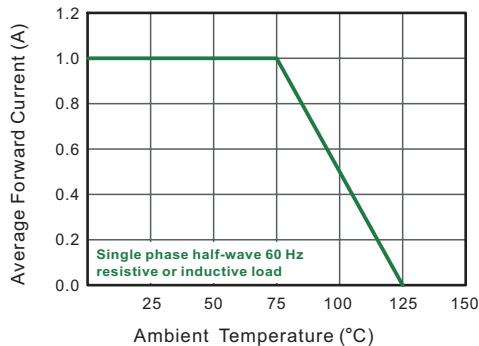
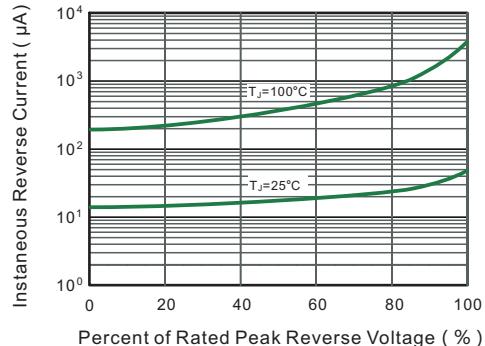
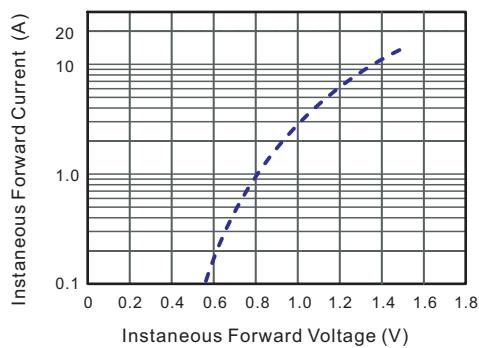
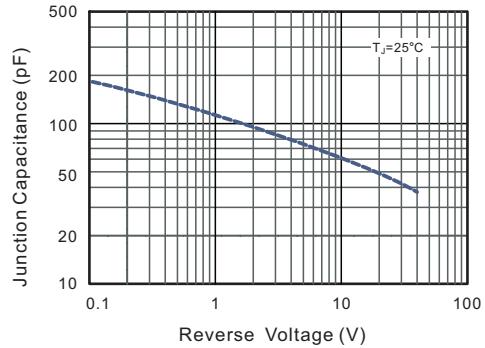
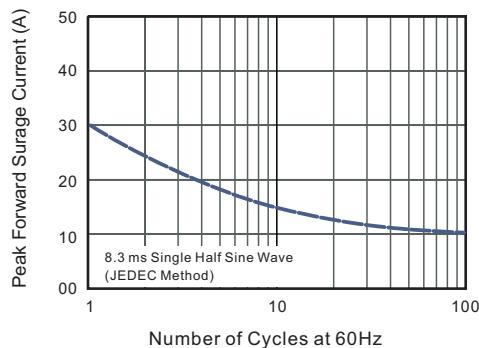
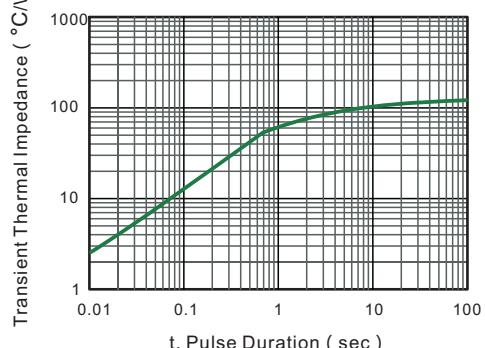

**Absolute Maximum Ratings and Electrical characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

| Parameter  | Symbols         | BAT46W     | Units |
|--|-----------------|------------|-------|
| Maximum Repetitive Peak Reverse Voltage  | $V_{RRM}$       | 100        | V     |
| Maximum RMS voltage  | $V_{RMS}$       | 70         | V     |
| Maximum DC Blocking Voltage  | $V_{DC}$        | 100        | V     |
| Maximum Average Forward Rectified Current  | $I_{F(AV)}$     | 0.5        | A     |
| Peak Forward Surge Current, 8.3ms<br>Single Half Sine-wave Superimposed<br>on Rated Load (JEDEC method)      | $I_{FSM}$       | 30         | A     |
| Max Instantaneous Forward Voltage at 1 A   | $V_F$           | 0.85       | V     |
| Maximum DC Reverse Current $T_a = 25^\circ\text{C}$<br>at Rated DC Reverse Voltage $T_a = 100^\circ\text{C}$ | $I_R$           | 0.2<br>5   | mA    |
| Typical Junction Capacitance <sup>1)</sup>   | $C_j$           | 80         | pF    |
| Typical Thermal Resistance <sup>2)</sup>   | $R_{\theta JA}$ | 115        | °C/W  |
| Operating Junction Temperature Range   | $T_j$           | -55 ~ +125 | °C    |
| Storage Temperature Range  | $T_{stg}$       | -55 ~ +150 | °C    |

<sup>1)</sup> Measured at 1MHz and applied reverse voltage of 4 V D.C.

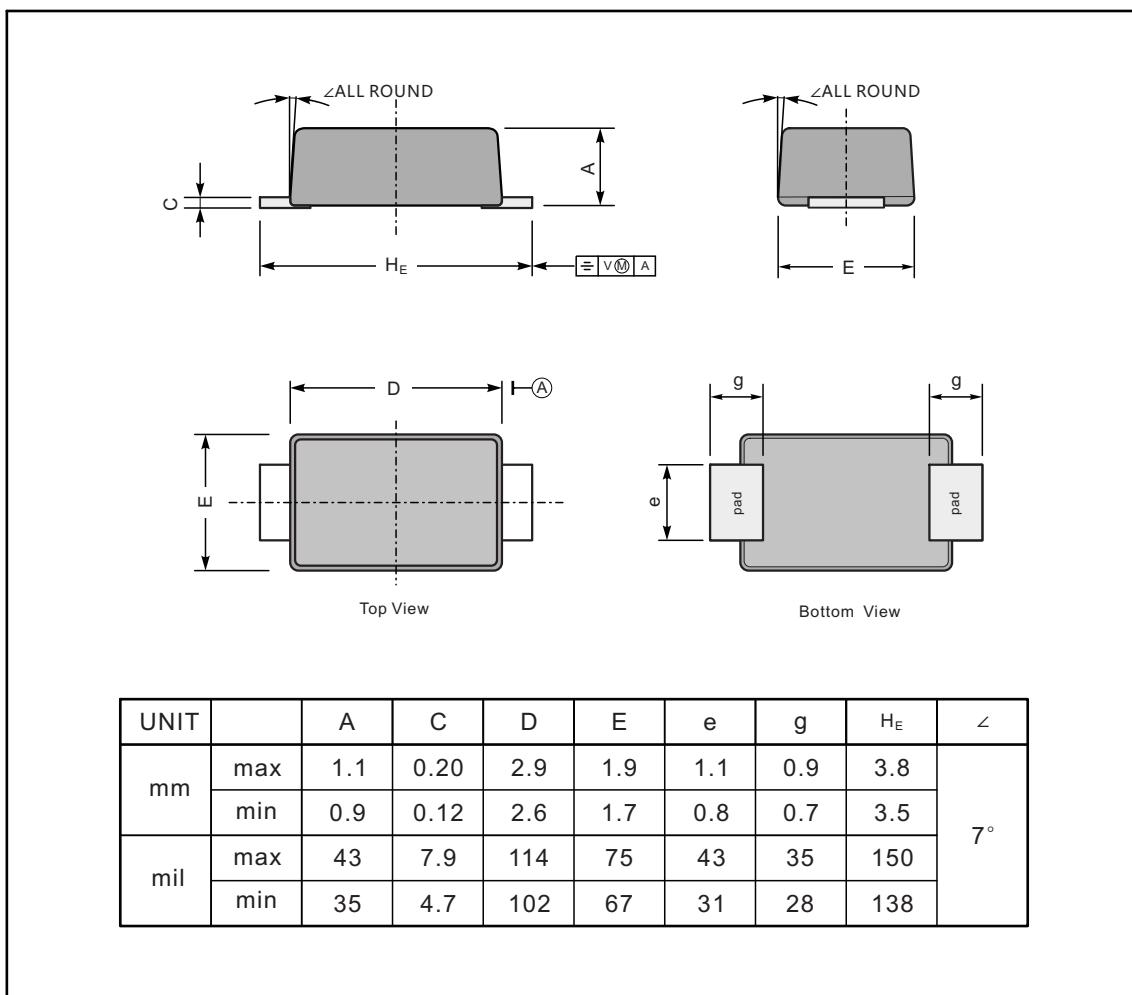
<sup>2)</sup> P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.

**Fig.1 Forward Current Derating Curve**

**Fig.2 Typical Reverse Characteristics**

**Fig.3 Typical Forward Characteristic**

**Fig.4 Typical Junction Capacitance**

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

**Fig.6- Typical Transient Thermal Impedance**


**PACKAGE OUTLINE**

Plastic surface mounted package; 2 leads

SOD-123FL



## The recommended mounting pad size

