THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C9	REVISED PER ECR-22-149019	16AUG2022	N.H	L.C

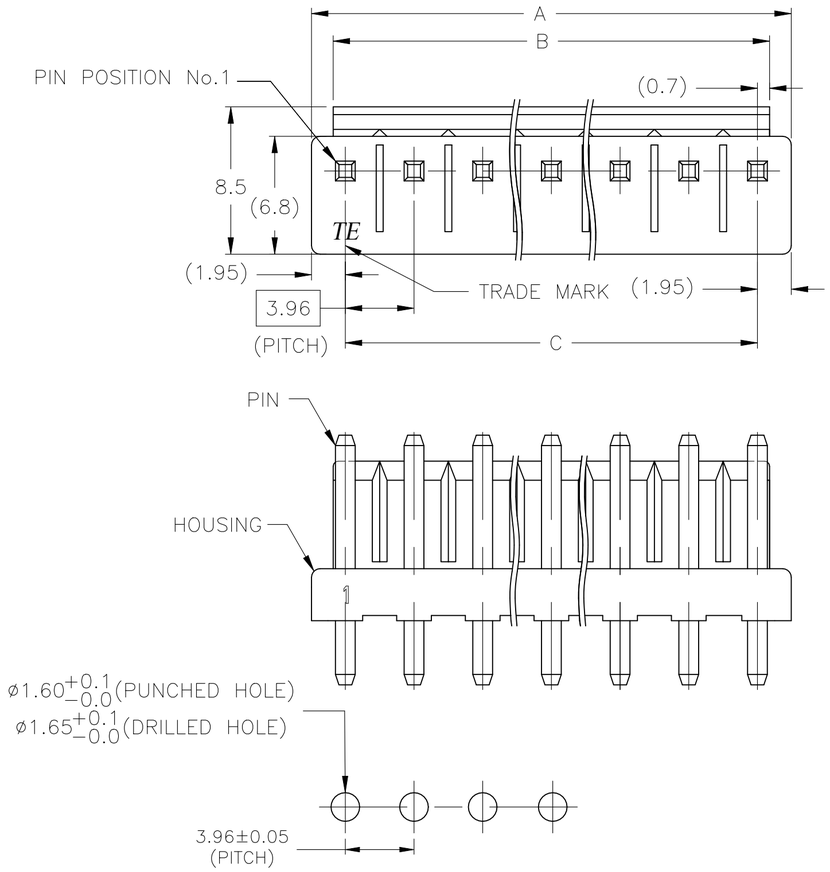



4 2 FIG. 1

1 MATING CONN P/N: □-1123722-□

2 APPLICABLE P.C.B LAYOUT: SEE FIG. 1

3 APPLICABLE P.C.B THICKNESS: 1.60.

4 SKETCHES SHOW NO PIN MISSING.

5 COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALIC MATERIAL SUPPORTING A CURRENT CARRYING CONNECTION DETAILED IN IEC 60335-1 SECTION 30. (GWT [GLOW WIRE TEST]) 750° SPEC.

6 CONTACT: POST TIN OVER BRASS

7 HOUSING: PBT, 30% GLASS, UL94-V0(ONLY NATURAL COLOR).

8 BALANCE OF X-1123724-X WILL BE REMOVED FROM DRAWING 1123723 IN THE NEAR FUTURE AND ADDED TO THIS DRAWING.

9 O : WITH PIN, X : WITHOUT PIN.

10 HOUSING: NYLON, 15% GLASS

GWT 5	HOUSING MATERIAL	1	2	3	4	5	6	7	8	9	10	11	"C"	"B"	"A"	COLOR	POSN	ASS'Y P/N
		PIN POSITION 9											DIMENSION					
NO	7	O	O	X	O	O	O	O	O	/	/	/	27.72	29.12	31.62	NATURAL	8	1-1123724-7
YES	10	O	O	O	X	O	X	O	X	O	X	O	39.60	41.00	43.50	NATURAL	11	8-1123724-6
YES	10	O	X	O	X	O	X	O	X	O	X	O				NATURAL		7-1123724-6
NO	7	O	X	O	X	O	X	O	X	O	X	O				NATURAL		1-1123724-6
YES	10	O	O	O	X	O	X	O	X	O	/	/	31.68	33.08	35.58	NATURAL	9	9-1123724-6
YES	10	O	X	O	X	O	X	O	X	O	/	/				NATURAL		7-1123724-5
NO	7	O	X	O	X	O	X	O	X	O	/	/				GREEN		6-1123724-5
		O	X	O	X	O	X	O	X	O	/	/				BLACK		5-1123724-5
		O	X	O	X	O	X	O	X	O	/	/				RED		4-1123724-5
		O	X	O	X	O	X	O	X	O	/	/				BLUE		3-1123724-5
		O	X	O	X	O	X	O	X	O	/	/				YELLOW		2-1123724-5
		O	X	O	X	O	X	O	X	O	/	/				NATURAL		1-1123724-5
YES	10	O	X	O	X	O	X	O	/	/	/	/	23.76	25.16	27.66	ORANGE	7	9-1123724-4
NO	7	O	X	O	X	O	X	O	/	/	/	/				PINK		8-1123724-4
		O	X	O	X	O	X	O	/	/	/	/				GRAY		7-1123724-4
YES	10	O	X	O	X	O	X	O	/	/	/	/				NATURAL		7-1123724-1
NO	7	O	X	O	X	O	X	O	/	/	/	/				GREEN		6-1123724-4
		O	X	O	X	O	X	O	/	/	/	/				BLACK		5-1123724-4
		O	X	O	X	O	X	O	/	/	/	/				RED		4-1123724-4
		O	X	O	X	O	X	O	/	/	/	/				BLUE		3-1123724-4
		O	X	O	X	O	X	O	/	/	/	/				YELLOW		2-1123724-4
		O	X	O	X	O	X	O	/	/	/	/				NATURAL		1-1123724-4
YES	10	O	X	O	X	O	/	/	/	/	/	/	15.84	17.24	19.74	NATURAL	5	7-1123724-3
NO	7	O	X	O	X	O	/	/	/	/	/	/				GREEN		6-1123724-3
		O	X	O	X	O	/	/	/	/	/	/				BLACK		5-1123724-3
		O	X	O	X	O	/	/	/	/	/	/				RED		4-1123724-3
		O	X	O	X	O	/	/	/	/	/	/				BLUE		3-1123724-3
		O	X	O	X	O	/	/	/	/	/	/				YELLOW		2-1123724-3
		O	X	O	X	O	/	/	/	/	/	/				NATURAL		1-1123724-3
NO	7	O	X	O	/	/	/	/	/	/	/	/	7.92	9.32	11.82	GREEN	3	6-1123724-2
		O	X	O	/	/	/	/	/	/	/	/				BLACK		5-1123724-2
		O	X	O	/	/	/	/	/	/	/	/				RED		4-1123724-2
		O	X	O	/	/	/	/	/	/	/	/				BLUE		3-1123724-2
		O	X	O	/	/	/	/	/	/	/	/				YELLOW		2-1123724-2
		O	X	O	/	/	/	/	/	/	/	/				NATURAL		1-1123724-2

1123724

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± 0.5
1 PLC ± 0.5
2 PLC ± 0.30
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL 6 7 10
FINISH 6

DWN 18JAN2014 NAGALAKSHMI K
CHK 18JAN2014 MICHIELUTTI THOMAS
APVD 18JAN2014 MICHIELUTTI THOMAS
PRODUCT SPEC 108-5609
APPLICATION SPEC 114-32134
WEIGHT —

TE Connectivity

NAME 3.96MM PITCH ECONOMY POWER (EP) CONNECTOR HEADER ASSEMBLY

SIZE A2 | CAGE CODE 00779 | DRAWING NO C-1123724 | RESTRICTED TO —

CUSTOMER DRAWING | SCALE N/A | SHEET 1 OF 1 | REV C9